

Specifications

備注(Remark)

1. 材料(Material)

膠芯:LCP UL94V-0

Housing:LCP UL94V-0

端子:磷銅

Contact:Phosphor Brass

2. 特性(characteristics):

額定電流:0.50AMP

Rating Current:0.50AMP

接觸阻抗:30mΩ Max

Contact Resistance:30mΩ Max

絕緣阻抗:500MΩ Min

Insulating Resistance:500 MΩ MIN

耐電壓: AC 200V


Withstanding Voltage:AC 200V/Minute

溫度範圍: -25° C to+ 85° C

Temperature Range: -25° C to+ 85° C




BTB3-M080AXXXXXMXX1




BTB3-F080AXXXXXMXX1

BTB CONNECTOR

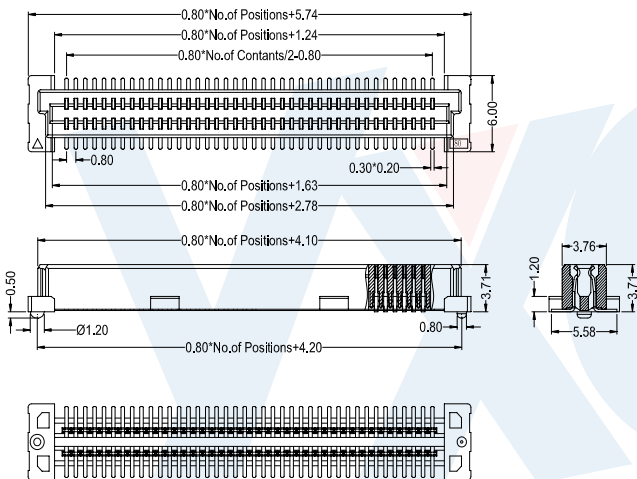

Recommended P.C.B Layout

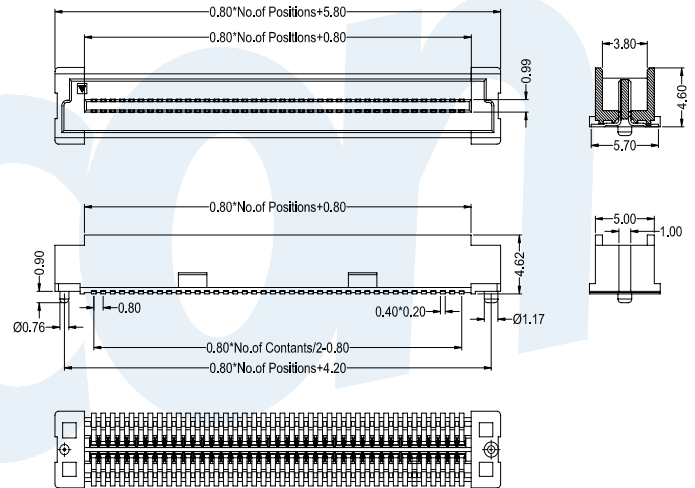

Recommended P.C.B Layout

BTB3-X	XXX	A	080	XX	M	X	X	X	1
Type	No.Of Pins Per Row		Contact Plating	Insulator Material:	Colour	Packing			
F:Female M:Male	10~80P		Full Of Gold A0=0.8u" ~ A9=30u" S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature	Semi-Gold B0=0.8U" ~ B9=30U" D:LCP	A:PBT B:PA6T C:PA9T	W:White P:Beige B:Black G:Grey427 E:Grey413 U:Blue Y:Yellow	A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray		