

## Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 0.75AMP

Rating Current: 0.75AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min




Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分钟



Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C





Temperature Range: -40° C to +105° C



Mating With/配對母座:  
F520/F521/F530



Dimension antitheses list			
ITEM	A	B	H
Standard	1.2/1.8	1.8	1.0/2.0
Alternate			1.5/3.0

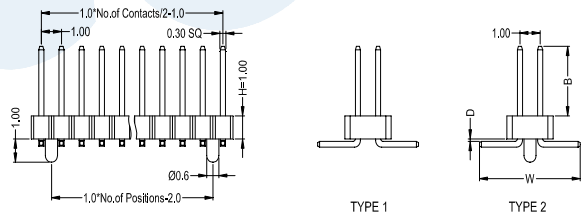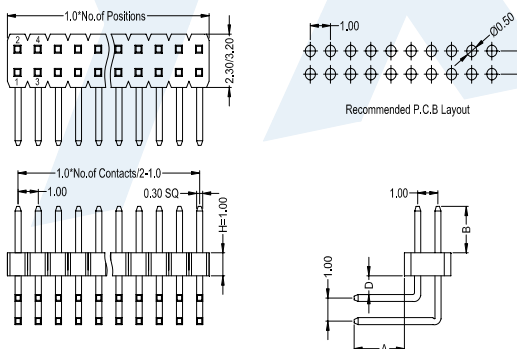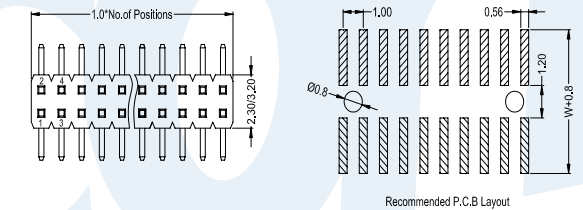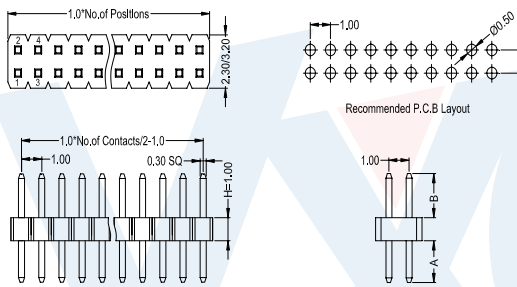

Dimension antitheses list				
ITEM	A	B	D	H
Standard	2.50	1.80	0.80	1.0/2.0
Alternate				1.5/3.0

Dimension antitheses list				
ITEM	B	D	W	H
Standard	1.80	0.10	5.0	1.0/2.0
Alternate				1.5/3.0

P 5 1 0 - 1 2  
P 5 1 5 - 1 2  
P 5 2 0 - 1 2  
P 5 3 0 - 1 2

XX

XX

X

X

XXX

X

X

X

No. Of Pins  
Per Row  
02~50P

Contact Plating  
Full Of Gold A0=0.8u"  
Semi-Gold B0=0.8U"  
A9=30u"  
B9=30U"  
S1=Ordinary Tin Plated  
S2=Matte Tin Plated  
S3=Tin-plated High-temperature

Insulator Material:  
C:PA9T  
D:LCP

Contact Shape:  
S: Straight  
R: Right Angle  
M: SMT

Length Of Terminal  
A: PE Bag  
B: Tape & Reel  
C: Tube  
D: Tube+CAP  
E: Tray

Packing Journal Number  
1: Type1  
2: Type2

Width Number  
A: 2.30  
B: 3.20

## Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 0.75AMP

Rating Current: 0.75AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分钟




Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C

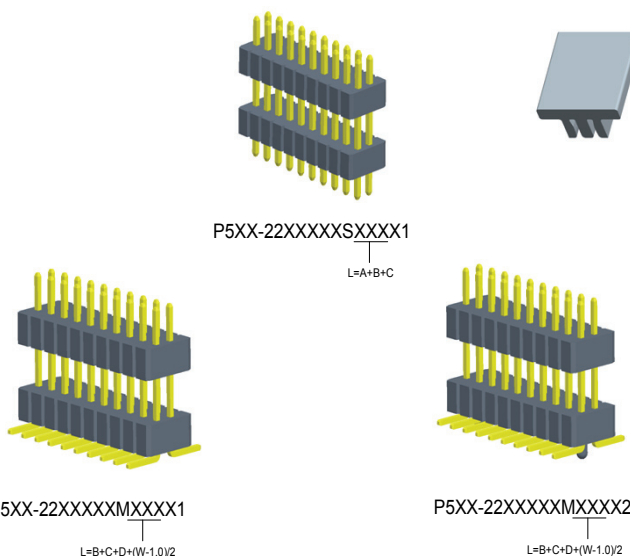

Mating With/配對母座:  
F520/F521/F530

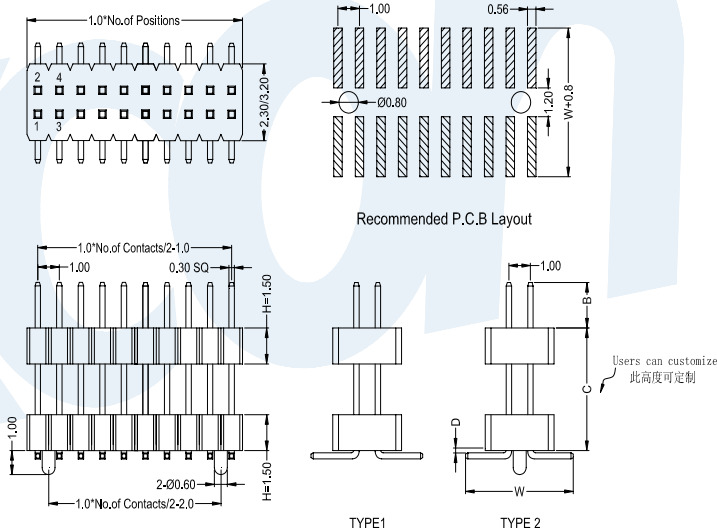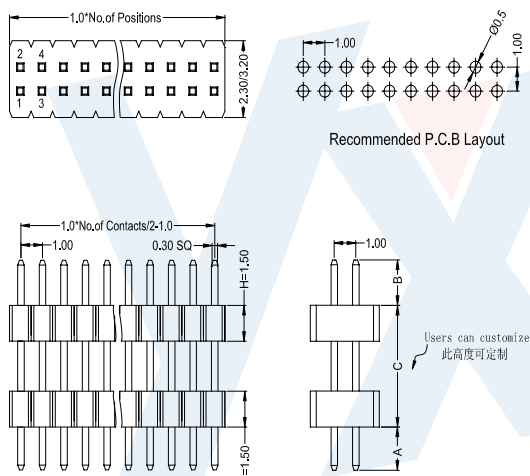

Dimension alternatives list			
ITEM	A	B	C
Standard	1.80	1.80	
Alternate			

H	
ITEM	H
Standard	1.0 2.0
Alternate	1.5 3.0

Dimension alternatives list					
ITEM	B	D	C	W	H
Standard	1.80	0.10		5.00	1.0 2.0
Alternate					1.5 3.0

- P 5 1 0 - 2 2
- P 5 1 5 - 2 2
- P 5 2 0 - 2 2
- P 5 3 0 - 2 2

- XX
  - XX
  - X
  - X
  - XXX
  - X
  - X
  - X
- No. Of Pins Per Row:** 02~50P
- Contact Plating:** Full Of Gold, Semi-Gold, A9=30u", B9=30U", S1=Ordinary Tin Plated, S2=Matte Tin Plated, S3=Tin-plated High-temperature
- Insulator Material:** C:PA9T, D:LCP
- Contact Shape:** S: Straight, M: SMT
- Length Of Terminal:**
- Packing:** A: PE Bag, B: Tape & Reel, C: Tube, D: Tube+CAP, E: Tray
- Journal Number:** 1: Type1, 2: Type2
- Width Number:** A: 2.30, B: 3.20