

# Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 0.75 AMP

Rating Current: 0.75 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C





Temperature Range: -40°C to+105°C

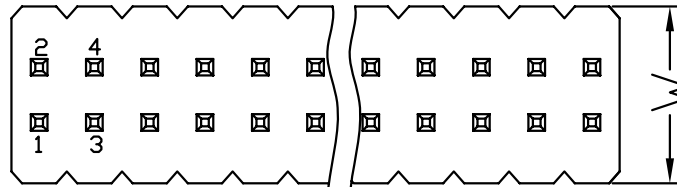

# Ordering Information

P5XX-22 XX XX X S XXX X 1

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL: OF	LENGTH OF TERMINAL	PACKING
10: 1.0mm	2~50P	Full Of Gold	B: PA6T		A: PE Bag
15: 1.5mm		Semi-gold	C: PA9T		B: Tape & Reel
		A0=0.8u"	D: LCP		C: Tube
		A1=1u"			D: Tube+CAP
		A2=1.5u"			E: Tray
		A3=2u"			
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

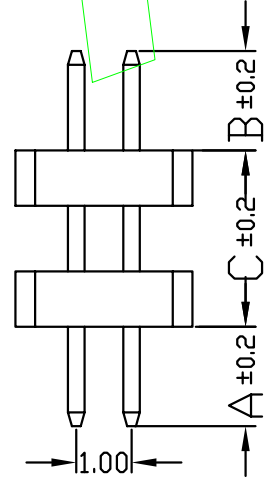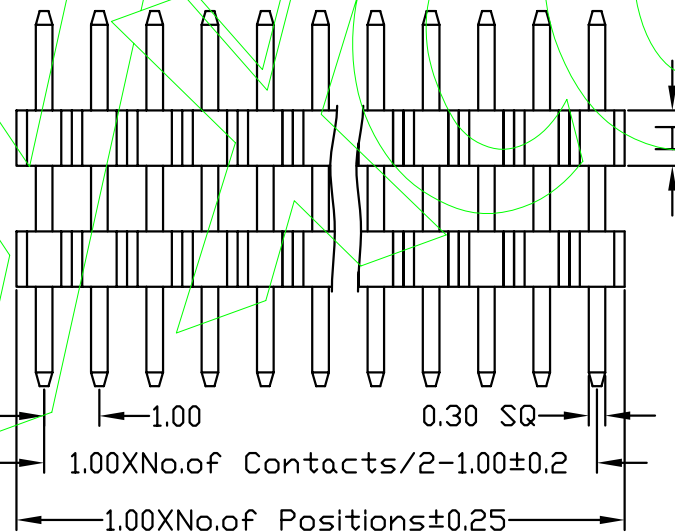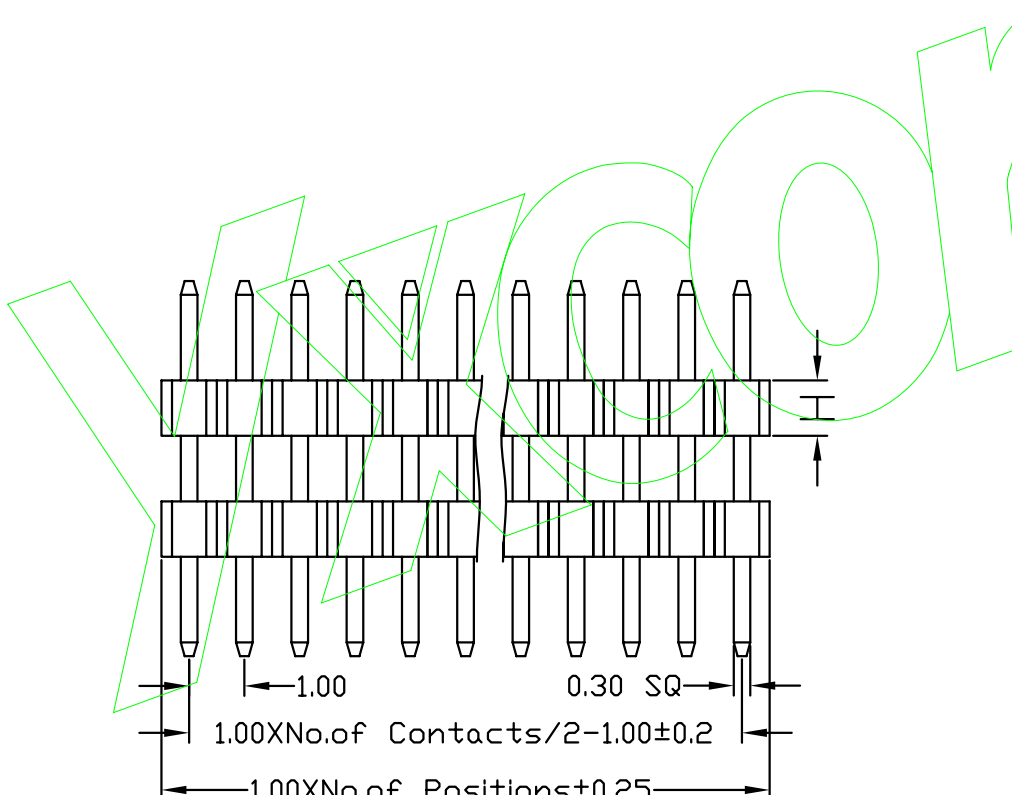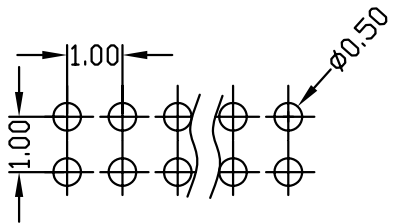

Dimension antitheses list					
ITEM	A	B	H	W	C
Standard	1.8	1.8	1.0	1.5	2.3 3.2
Alternate					

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P5XX-22XXXXXXSXXX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.00mm 排针 双排 双塑 180度
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	PROJ.	APPROVE	APPROVE		Customer No.	