

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 7.00AMP

Rating Current: 7.00AMP

接觸阻抗: 30mΩ Max

Contact Resistance: 30mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 1000V/分鐘


Withstanding Voltage: AC 1000V/Minute

溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C





F889-11XXXXXSUX1



F889-11XXXXXMUX1

Mating With/配對公座:
P825/P830/P832/P835

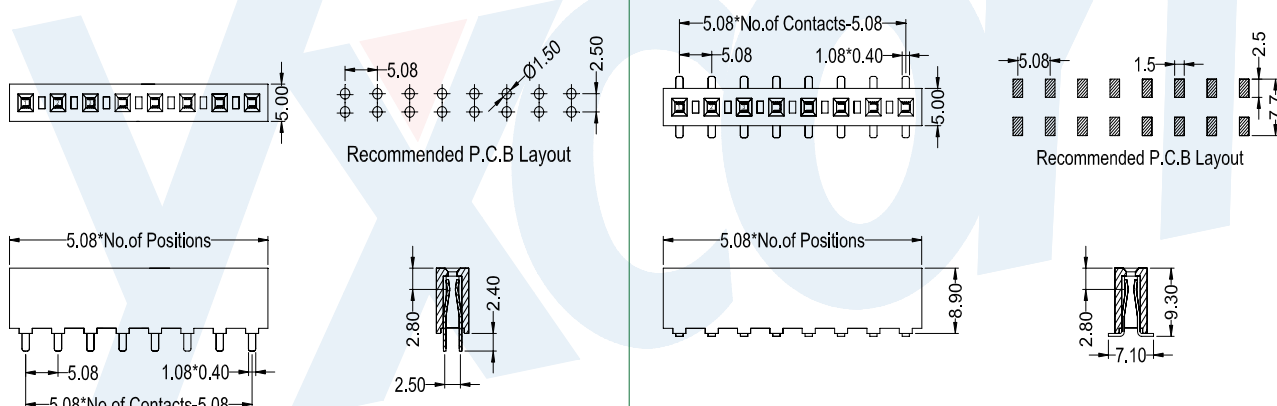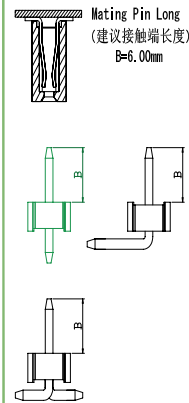

FEMALE HEADER

F 8 8 9 - 1 1	X X	X X	X	X	U	X	1
No.Of Pins Per Row 02~20P	Contact Plating Full Of Gold A0=0.8u" Semi-Gold B0=0.8U" ~ A9=30u" B9=30U" S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature	Insulator Material: B:PA6T C:PA9T D:LCP	Contact Shape: S: Straight M: SMT	Packing A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray			