

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C



Temperature Range: -40°C to+105°C

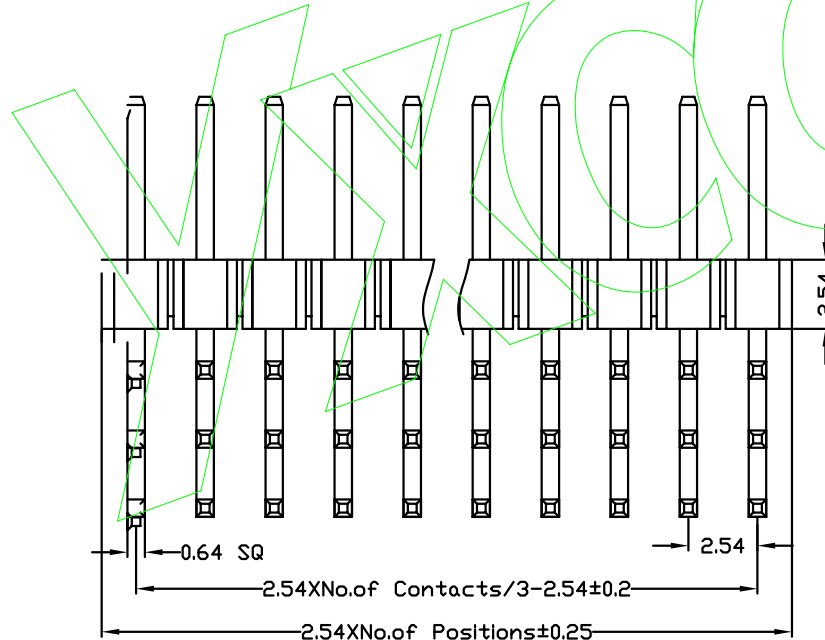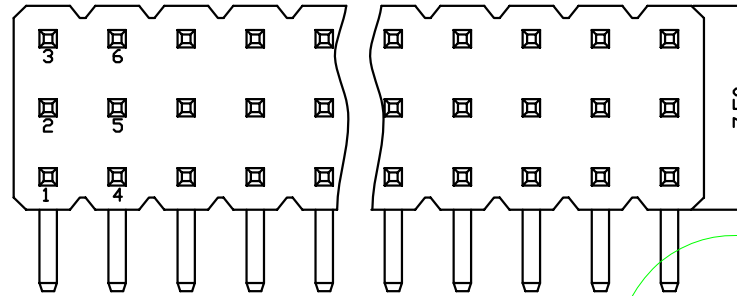

Ordering Information

P125-13 XX XX X R XXX X 1

HEIGHT OF HOUSING 25:2.54mm	NO.OF PINS PER ROW 3-40P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	INSULATOR MATERIAL: A: PBT B: PA6T C: PA9T D: LCP	LENGTH OF TERMINAL	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
--------------------------------	-----------------------------	---	---	---	--------------------	---

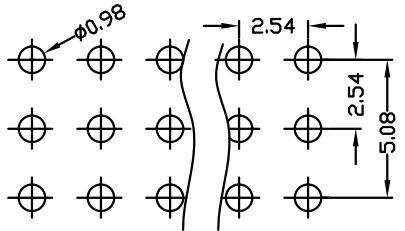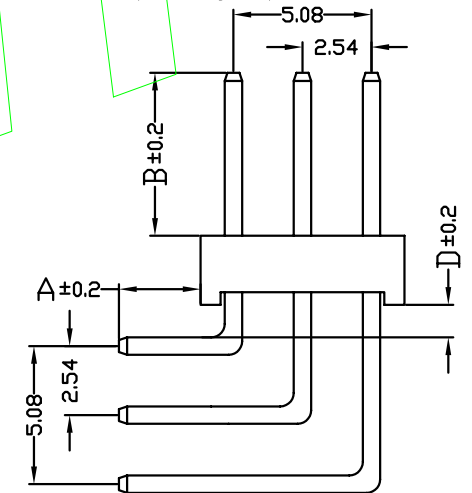

Dimension antitheses list				
ITEM	A	B	D	
Standard	3.0	6.0	0.6	1.2
Alternate				

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN	PART NO.		P125-13XXXXXXX1		
				X.XXX	±0.10	SHEET	1/1	CHECK	TITLE:		2.54mm排针 三排 塑高2.54 90度		
				Angle	±3°	PROJ.	APPROVE	Customer No.					
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL						