

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.





温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

P125-12 XX XX X Z XXX X 1

| | | | | | | |
|-------------------------------|--------------------------------|---|---|--|--------------------|--|
| HEIGHT OF HOUSING 25:2.5mm | NO.OF PINS PER ROW 2-40P | Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u" | Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U" | INSULATOR MATERIAL: B:PA6T C:PA9T D:LCP | LENGTH OF TERMINAL | PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray |
|-------------------------------|--------------------------------|---|---|--|--------------------|--|

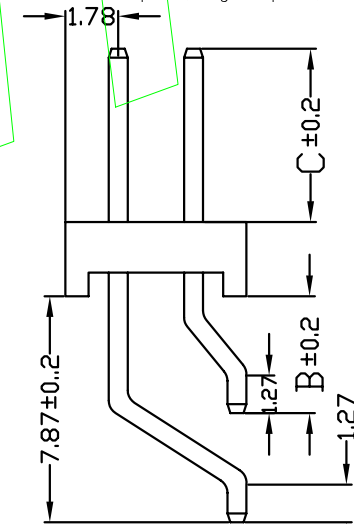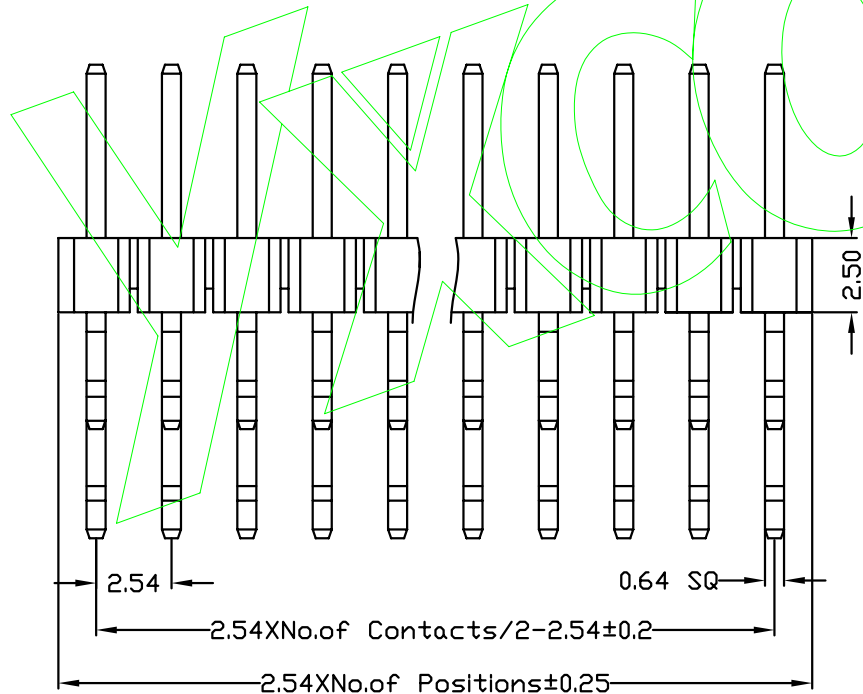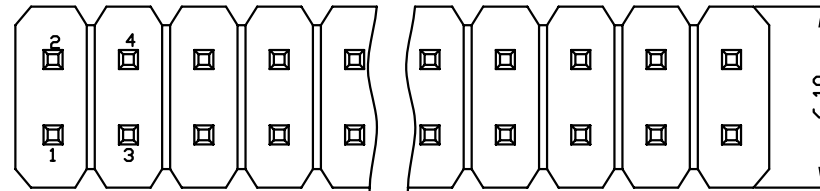

| Dimension antitheses list | | |
|---------------------------|------|------|
| ITEM | B | C |
| Standard | 3.68 | 6.00 |
| Alternate | | |

| | | | | | | | | | | | |
|-----|------|--------------------------|--|-----------|---------|-------|---------|--------------|----------|---|------------------------|
| | | | | OPERATION | | SCALE | | Fit | | 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd. | |
| | | | | X.X | ±0.25 | UNIT | | MM | | | |
| | | | | X.XX | ±0.20 | SIZE | A4 | DESIGN | PART NO. | | P125-12XXXXXXZXXX1 |
| | | | | X.XXX | ±0.10 | SHEET | 1/1 | CHECK | TITLE: | | 2.54mm 双排针 塑高2.5 卧式SMT |
| | | | | Angle | ±3° | PROJ. | APPROVE | Customer No. | | | |
| REV | DATE | MODIFICATION DESCRIPTION | | CHANGE | APPROVE | | | | | | |