

Specifications


备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):




额定电流: 3 AMP
 Rating Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to+105°C
 Temperature Range: -40°C to+105°C

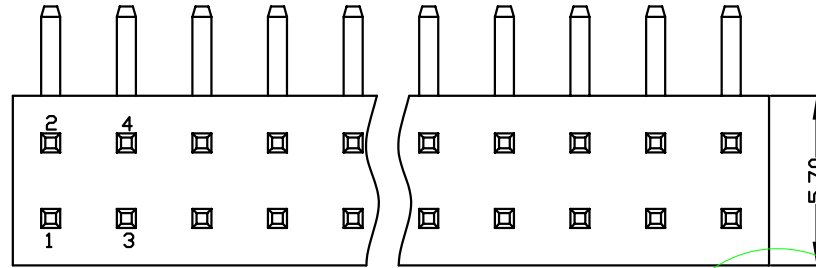

Ordering Information

P143-12 XX XX X R XXX X 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating		INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
43:4.30mm	2~40P	Full Of Gold	Semi-gold	A: PBT		A: PE Bag
		A0=0.8u"	B0=0.8U"	B: PA6T		B: Tape & Reel
		A1=1u"	B1=1U"	C: PA9T		C: Tube
		A2=1.5u"	B2=1.5U"	D: LCP		D: Tube+CAP
		A3=2u"	B3=2U"			E: Tray
		A4=3u"	B4=3U"			
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

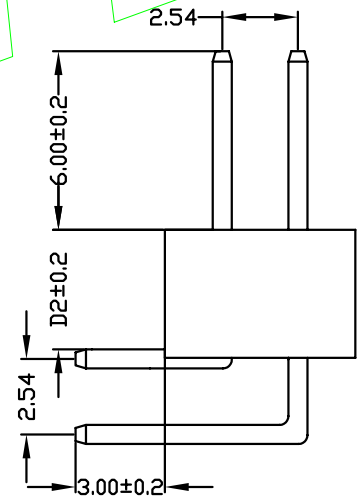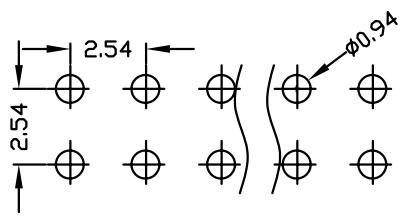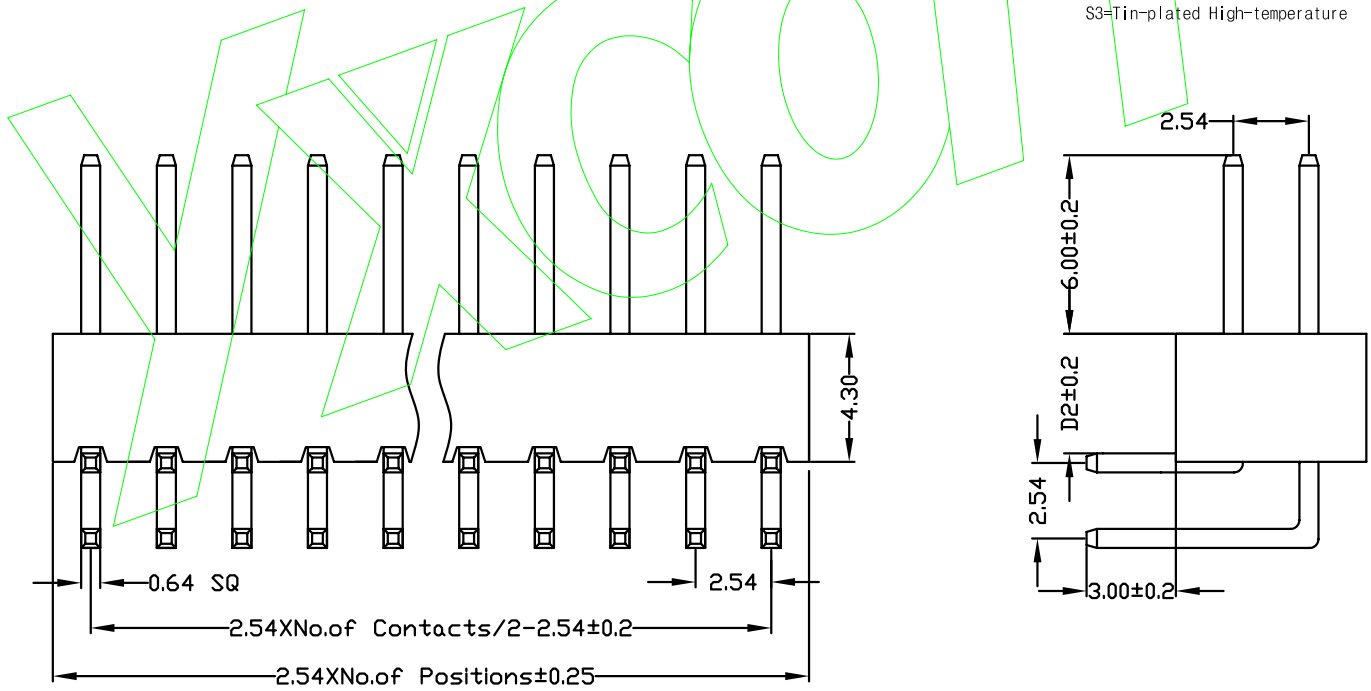

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P143-12XXXXRXXX1	
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm 双排针 塑高4.3 90度	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	SHEET	1/1	CHECK			
					DIM	TOL	PROJ.	☉	APPROVE	Customer No.		