

# Specifications

# Ordering Information

F263-21 XX XX X SY X 1

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.





耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	PACKING
1~40P	Full Of Gold	A: PBT	A: PE Bag
	A0=0.8u"	B: PA6T	B: Tape & Reel
	A1=1u"	C: PA9T	C: Tube
	A2=1.5u"	D: LCP	D: Tube+CAP
	A3=2u"		E: Tray
	A4=3u"		
	A5=5u"		
	A6=10u"		
	A7=15u"		
	A8=20u"		
	A9=30u"		
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

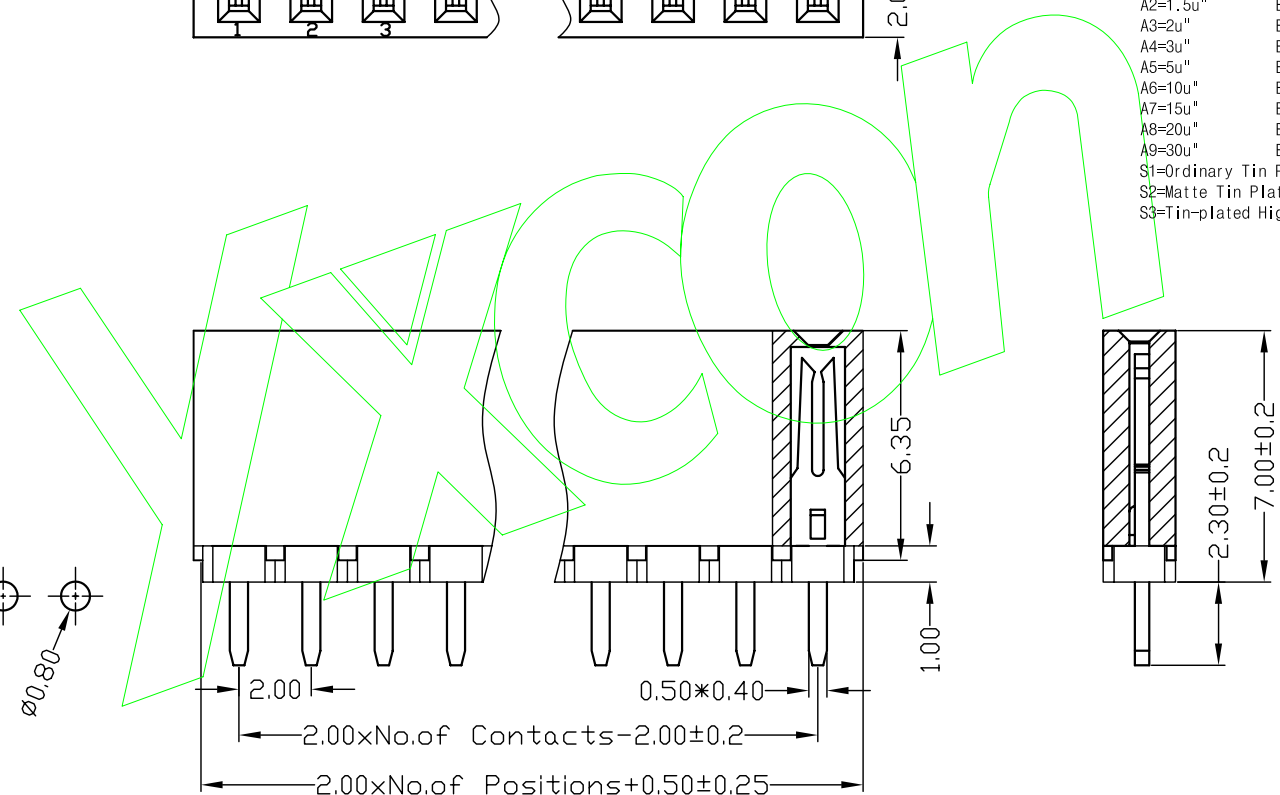

				OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司			
				X.X	±0.25	UNIT		MM		Dongguan Yuxi Electronic Co., Ltd.			
				X.XX	±0.20	SIZE	A4	DESIGN		PART NO.		F263-21XXXXXXSYX1	
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:		2.0mm单排母 塑高6.35 180度 加塑胶 (H=1.0) 总高7.0 Y型	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	PROJ.	APPROVE	APPROVE		Customer No.			
1		2		3		4		5		6		7	
1		2		3		4		5		6		7	

卢小强

PART NO.

F263-21XXXXXXSYX1

2.0mm单排母 塑高6.35 180度 加塑胶 (H=1.0) 总高7.0 Y型

Customer No.