

Ordering Information

DIP2-XX 2 32 XX A Y X 1

NO. OF PINS 10-80P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	INSULATOR MATERIAL: A:PBT	B:Black G:Grey427 E:Grey413 W:White U:Blue
S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature				


Specifications

备注 (Remark)

- 材料 (MATERIAL)
胶芯: PBT+30%G.F UL94V-0, 颜色: 黑色.
Housing: PBT+30%G.F UL94V-0, Color: Black
端子: 磷/青铜, 银底30u"MIN, 表面镀金1u"MIN
Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

- 额定电流: 3 AMP
Rating Current: 3 AMP.
- 接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
- 绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
- 耐电压: AC 500V.
Withstanding Voltage: AC 500V.
- 温度范围: -40°C to +105°C
Temperature Range: -40°C to +105°C

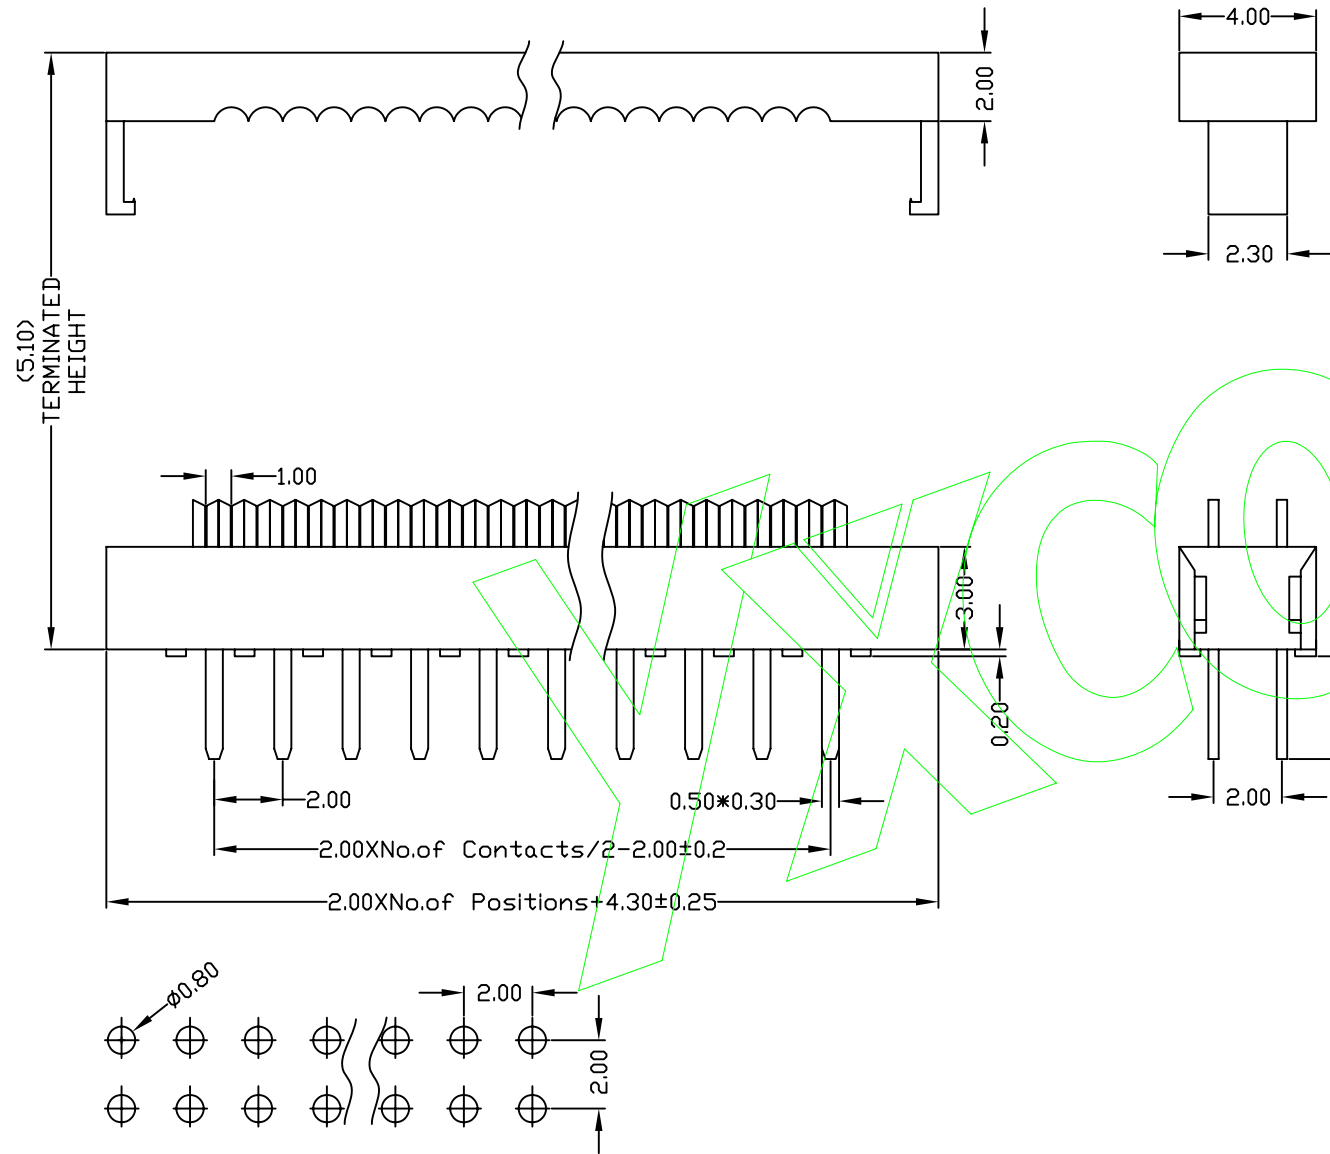

OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
X.X	±0.25	UNIT		MM			
X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	DIP2-XX232XXAYX1
X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0 DIP 塑高3.2 两件式
Angle	±3°	PROJ.	☉	APPROVE		Customer No.	
DIM	TOL						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
-----	------	--------------------------	--------	---------