

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 3.00AMP

Rating Current: 3.00AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分钟


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C


Temperature Range: -40° C to +105° C




B189-1XXXXXSXX1



B189-1XXXXRXX1

















B189-1XXXXMXX1



B189-1XXXXMXX2

Mating With/配對母座:
1DCI-XX370



L	
6P~8P	10P~64P
4.00	4.40

BOX HEADER B

B 1 8 9 - 1	XX	XX	X	X	X	X	X
No. Of Pins 06~64P	Contact Plating Full Of Gold A0=0.8u" ~ A9=30u" S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature	Contact Plating Semi-Gold B0=0.8U" ~ B9=30U"	Insulator Material: A:PBT B:PA6T C:PA9T D:LCP	Contact Shape: S: Straight R: Right Angle M: SMT	Insulator Colour B: Black G: Grey	Packing A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray	Journal Number 1: Type1 2: Type2

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 3.00AMP

Rating Current: 3.00AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C


Temperture Range: -40° C to +105° C




B190-1XXXXXSXX1



B190-1XXXXRXX1










B190-1XXXXMXX1



B190-1XXXXMXX2

Mating With/配對母座:
IDC1-XX370/F150/F168/F171/F185

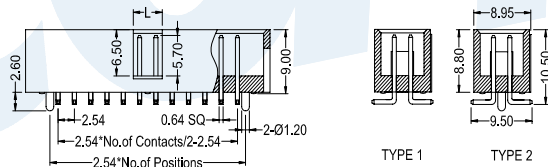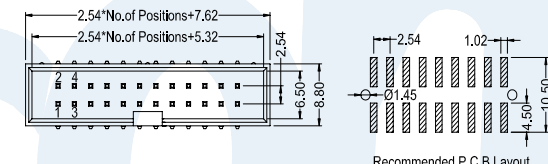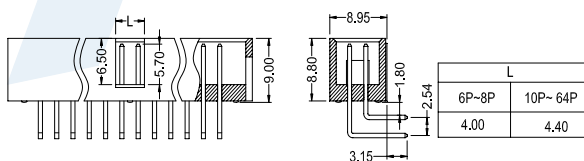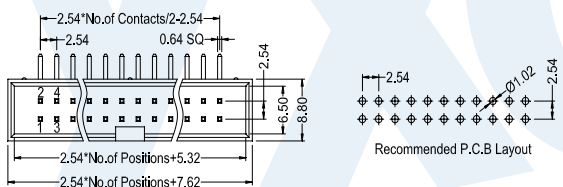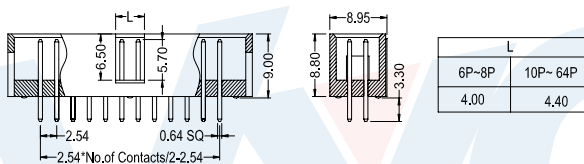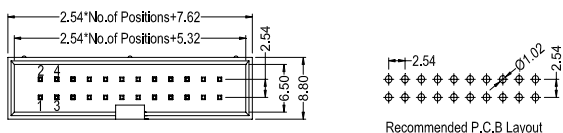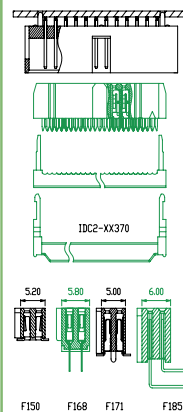

L	4.00	4.40
6P~8P	10P~ 64P	

BOX HEADER B

B 190 - 1

XX

XX

X

X

X

X

X

No.Of Pins
06~64P

Contact Plating
Full Of Gold Semi-Gold
A0=0.8u" B0=0.8u"

A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Material:
A:PBT
B:PA6T
C:PA9T
D:LCP

Contact Shape:
S: Straight
R: Right Angle
M: SMT

Insulator Colour
B: Black
G: Grey

Packing
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1
2: Type2

[Http://www.yxcon.com](http://www.yxcon.com)

E-mail: yx@yxcon.com

YUXI DONGGUAN (東莞)
YUXI TAIWAN (台灣)

TEL:+86 769 85397456
TEL:+886 3313 2933

FAX:+86 769 85396015
FAX:+886 3313 2935

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 3.00AMP

Rating Current: 3.00AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C


Temperature Range: -40° C to +105° C



B190-2XXXXXXSXX1








B190-2XXXXXXMXX1







B190-2XXXXXXMXX2

Mating With/配對母座:
 IDC1-XX370/F150/F168/F171/F185

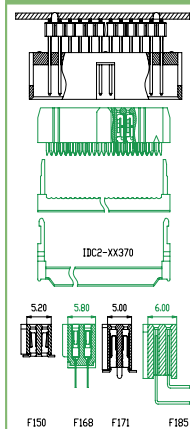

Dimension antitheses list			L	
ITEM	A	C	6P~8P	10P~ 64P
Standard	3.30		4.00	4.40
Alternate				

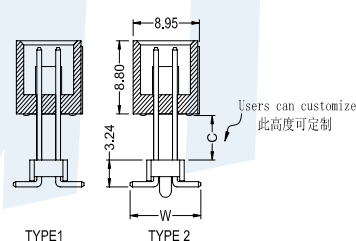

Dimension antitheses list			L	
ITEM	C	W	6P~8P	10P~ 64P
Standard		9.50	4.00	4.40
Alternate				

BOX HEADER B

B190-2

XX

XX

X

X

X

X

X

No.Of Pins
06~64P

Contact Plating
 Full Of Gold A0=0.8u"
 ~
 A9=30u"
 S1=Ordinary Tin Plated
 S2=Matte Tin Plated
 S3=Tin-plated High-temperature

Insulator Material:
 A:PBT
 B:PA6T
 C:PA9T
 D:LCP

Contact Shape:
 S: Straight
 M: SMT

Insulator Colour
 B: Black
 G: Grey

Packing
 A: PE Bag
 B: Tape & Reel
 C: Tube
 D: Tube+CAP
 E: Tray

Journal Number
 1: Type1
 2: Type2

[Http://www.yxcon.com](http://www.yxcon.com)

E-mail: yx@yxcon.com

YUXI DONGGUAN (東莞)
 YUXI TAIWAN (台灣)

TEL:+86 769 85397456
 TEL:+886 3313 2933

FAX:+86 769 85396015
 FAX:+886 3313 2935

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 3.00AMP

Rating Current: 3.00AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘

Withstanding Voltage: AC 500V/Minute


溫度範圍: -40° C to +105° C

Temperture Range: -40° C to +105° C





B190-1XXXXXSXX2



Mating With/配對母座:
IDC1-XX370/F150/F168/F171/F185

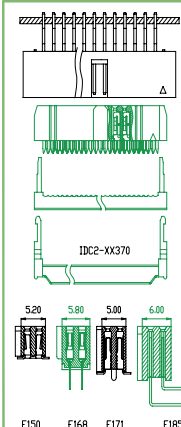

BOX HEADER B

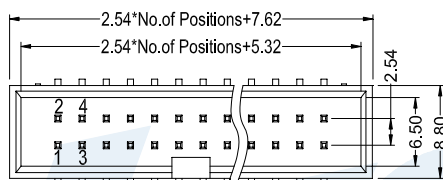

Recommended P.C.B Layout

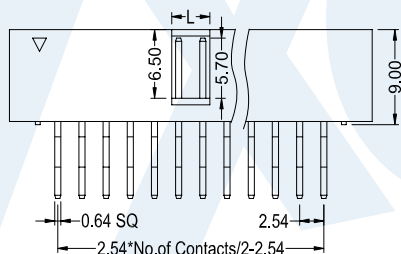

Users can customize
可定制

L	
6P ~ 8P	10P ~ 64P
4.00	4.40

B	190-1	XX	XX	X	S	X	X	2		
No.Of Pins	06~64P	Contact Plating	Full Of Gold A0=0.8u" ~ A9=30u" S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature	Semi-Gold B0=0.8U" ~ B9=30U"	Insulator Material:	A:PBT B:PA6T C:PA9T D:LCP	Insulator Colour	B:Black G:Grey	Packing	A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray

[Http://www.yxcon.com](http://www.yxcon.com)

E-mail: yx@yxcon.com

YUXI DONGGUAN (東莞)
YUXI TAIWAN (台灣)

TEL:+86 769 85397456
TEL:+886 3313 2933

FAX:+86 769 85396015
FAX:+886 3313 2935

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 3.00AMP

Rating Current: 3.00AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘

Withstanding Voltage: AC 500V/Minute






溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C



B190-1XXXXPXX1

Mating With/配對母座:
IDC1-XX370/F150/F168/F171/F185

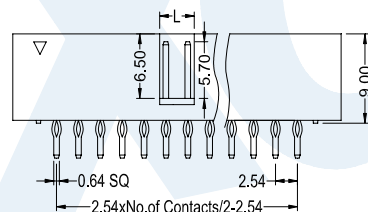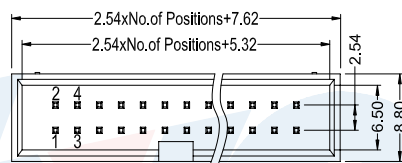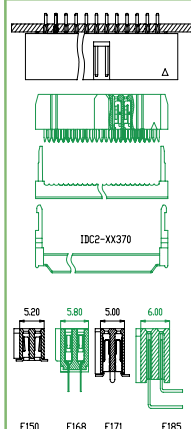

L	
6P~8P	10P~64P
4.00	4.4

B 190 - 1

XX

XX

X

P

X

X

1

No. Of Pins
06~64P

Contact Plating
 Full Of Gold
 A0=0.8u"
 ~
 A9=30u"
 S1=Ordinary Tin Plated
 S2=Matte Tin Plated
 S3=Tin-plated High-temperature

Insulator Material:
 A: PBT
 B: PA6T
 C: PA9T
 D: LCP

Insulator Colour
 B: Black
 G: Grey

Packing
 A: PE Bag
 B: Tape & Reel
 C: Tube
 D: Tube+CAP
 E: Tray

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 3.00AMP

Rating Current: 3.00AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C


Temperature Range: -40° C to +105° C



B194-1XXXXXSXX1




B194-1XXXXRXX1






B194-1XXXXMXX1

Mating With/ 配對母座:
IDC1-XX370/F150/F168/F171/F185

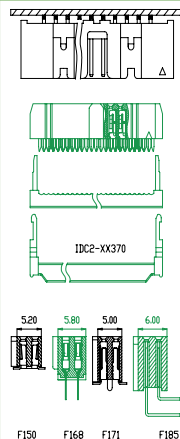

BOX HEADER B

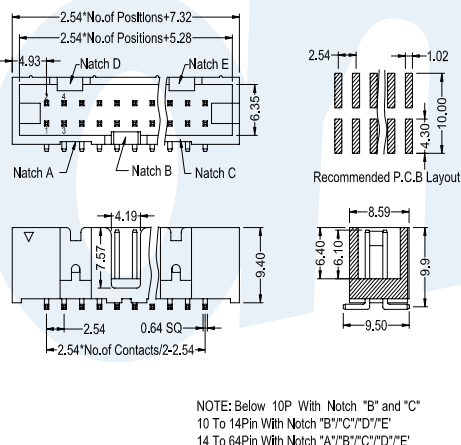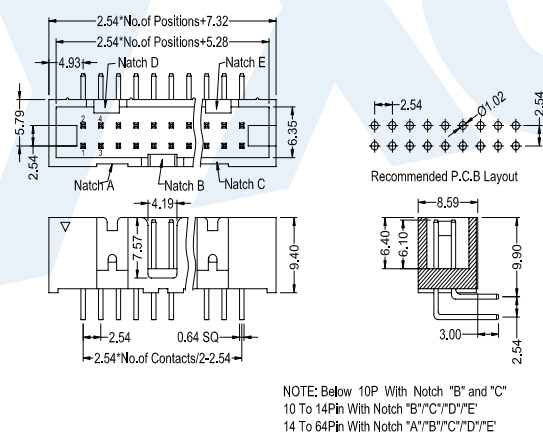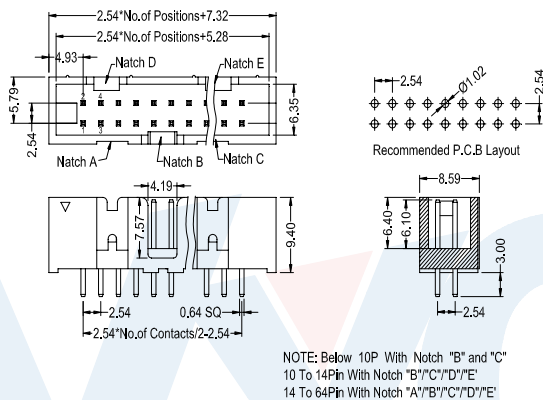

B 194 - 1	XX	XX	X	X	X	X	1
No.Of Pins 06~64P	Contact Plating Full Of Gold A0=0.8u" ~ A9=30u" S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature	Semi-Gold B0=0.8u" ~ B9=30u"	Insulator Material: A:PBT B:PA6T C:PA9T D:LCP	Contact Shape: S: Straight R: Right Angle M: SMT	Insulator Colour B: Black G: Grey	Packing A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray	

Http://www.yxcon.com

E-mail:yx@yxcon.com

YUXI DONGGUAN (東莞)
YUXI TAIWAN (台灣)

TEL:+86 769 85397456
TEL:+886 3313 2933

FAX:+86 769 85396015
FAX:+886 3313 2935

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 3.00AMP

Rating Current: 3.00AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C

Temperture Range: -40° C to +105° C











B113-1XXXXXSSX1



B113-1XXXXXRX1

Mating With/配對母座:
IDC1-XX370



BOX HEADER B

B 113 - 1

XX

XX

X

X

X

X

1

No.Of Pins
06~64P

Contact Plating
Full Of Gold
A0=0.8u"
~
A9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Semi-Gold
B0=0.8U"
~
B9=30U"

Insulator Material:
A:PBT
B:PA6T
C:PA9T
D:LCP

Contact Shape:
S: Straight
R: Right Angle

Insulator Colour
B: Black
G: Grey

Packing
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 3.00AMP

Rating Current: 3.00AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C

Temperture Range: -40° C to +105° C





B110-1XXXXXDXX1









B113-1XXXXXDXX1

Mating With/配對母座:
ID61-XX370



BOX HEADER B

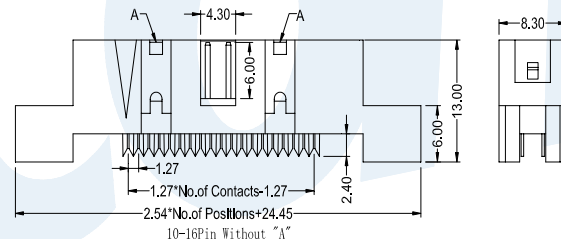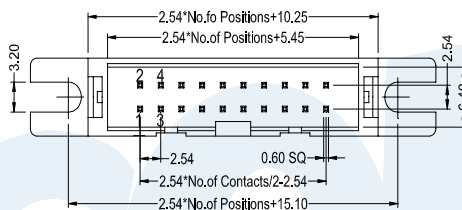

B 110 - 1
B 113 - 1

XX

No. Of Pins
06~64P

XX

Contact Plating
Full Of Gold A0=0.8u"
Semi-Gold B0=0.8U"
A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

X

Insulator Material:
A:PBT
B:PA6T
C:PA9T
D:LCP

D

Insulator Colour
B:Black
G:Grey

X

Packing
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

X

1