

**Specifications**



**Housing**

備注 (Remark)

1. 材料 (Material)


膠芯: PBT UL94V-0

Housing: PBT UL94V-0



6501H-XX-PT

6501H-XX-PT

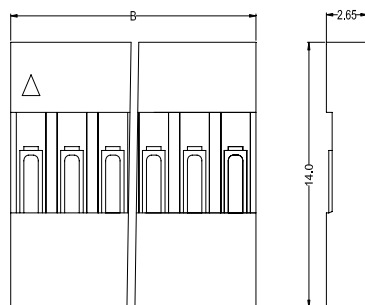

6501H-XX-PT	PBT UL 94V-0	6501T, 6501TM	6501W	1,000Pcs
PART NO	Material	Suitable SWB Terminal	Mates With SWB Pin Header	Q' ty/Bag

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
1	--	2.54	11	25.40	27.94
2	2.54	5.08	12	27.94	30.48
3	5.08	7.62	13	30.48	33.02
4	7.62	10.16	14	33.02	35.56
5	10.16	12.70	15	35.56	38.10
6	12.70	15.24	16	38.10	40.64
7	15.24	17.78	17	40.64	43.18
8	17.78	20.32	18	43.18	45.72
9	20.32	22.86	19	45.72	48.26
10	22.86	25.40	20	48.26	50.80



**Housing**

備注 (Remark)

1. 材料 (Material)


膠芯: PBT UL94V-0

Housing: PBT UL94V-0



6501H-2\*XX-PT

6501H-2\*XX-PT

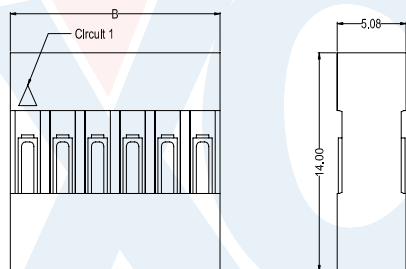

Poles	Dimensions (mm)		Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B		A	B
04	2.54	5.08	30	35.56	38.10	56	68.58	71.12
06	5.08	7.62	32	38.10	40.64	58	71.12	73.66
08	7.62	10.16	34	40.64	43.18	60	73.66	76.20
10	10.16	12.70	36	43.18	45.72	62	76.20	78.74
12	12.70	15.24	38	45.72	48.26	64	78.74	81.28
14	15.24	17.78	40	48.26	50.80	66	81.28	83.82
16	17.78	20.32	42	50.80	53.34	68	83.82	86.36
18	20.32	22.86	44	53.34	55.88	70	86.36	88.90
20	22.86	25.40	46	55.88	58.42	72	88.90	91.44
22	25.40	27.94	48	58.42	60.96	74	91.44	93.98
24	27.94	30.48	50	60.96	63.50	76	93.98	96.52
26	30.48	33.02	52	63.50	66.04	78	96.52	99.06
28	33.02	35.56	54	66.04	68.58	80	99.06	101.60

6501H-2*XX-PT	PBT UL 94V-0	6501T, 6501TM	6501W	1,000Pcs
PART NO	Material	Suitable SWB Terminal	Mates With SWB Pin Header	Q' ty/Bag

W

WAFER


**Terminal**

備注 (Remark)

1. 材料 (Material)

端子: 黃銅/磷青銅

Contact: Brass/Phosphor Bronze

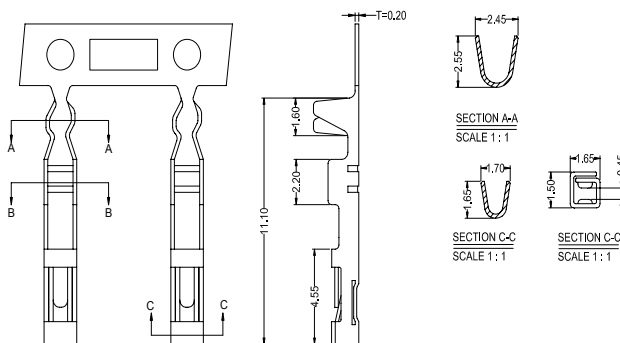

6501T-XXX-L

6501T-XXX-L

6501T-PG01-L	Phosphor Bronze	AWG#22-26	1.63mm(Max)	Stamping Before Plating:30-50u" Ni>Contact Area Gold Flash	6501H	10,000Pcs
6501T-PSN-L	Phosphor Bronze	AWG#22-26	1.63mm(Max)	Stamping Before Plating:30-50u" Ni;70-120u" Sn		
6501T-BG01-L	Brass	AWG#22-26	1.63mm(Max)	Stamping Before Plating:30-50u" Ni>Contact Area Gold Flash		
6501T-BSNB-L	Brass	AWG#22-26	1.63mm(Max)	Plating Before Stamping:10-30u" Ni;40-60u" Sn		
6501T-BSN-L	Brass	AWG#22-26	1.63mm(Max)	Stamping Before Plating:30-50u" Ni;70-120u" Sn		
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In SWB Housing	Q' ty/Reel