

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP UL94V-0, 顏色: 黑色

Housing: PA9T/LCP UL94V-0, Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 0.75AMP

Rating Current: 0.75AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘

Withstanding Voltage: AC 500V/Minute


溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C




P614-12XXXXXXMXXX1

$$L=B+H+D+(W-1.2)/2$$




P614-12XXXXXXMXXX2

$$L=B+H+D+(W-1.2)/2$$



P614-22XXXXXXMXXX1




$$L=B+D+C+(W-1.2)/2$$




P614-22XXXXXXMXXX2

$$L=B+D+C+(W-1.2)/2$$

Mating With/配對母座:
F631

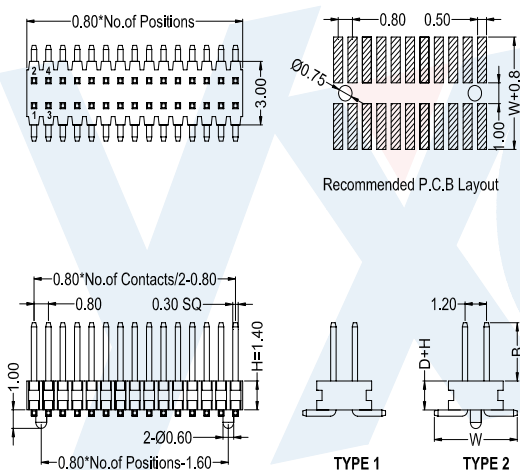

Dimension anitheses list			
ITEM	B	D	W
Standard	2.8	0	4.6
Alternate			

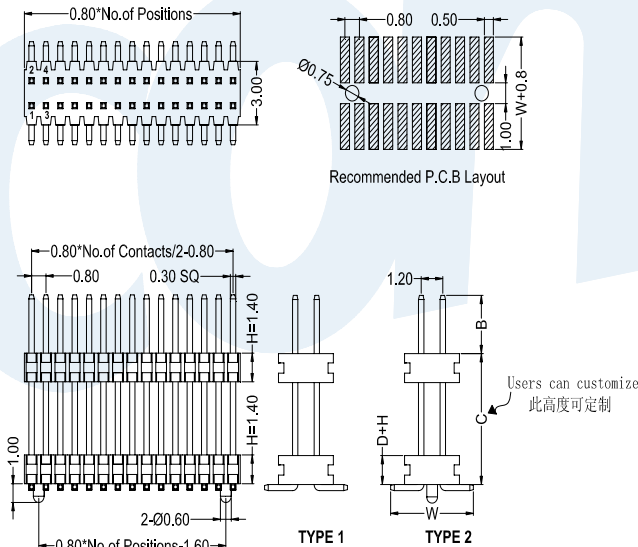

Dimension anitheses list				
ITEM	B	C	D	W
Standard	2.8		0	4.6
Alternate				

P 6 1 4 - 1 2
P 6 1 4 - 2 2

XX
No. Of Pins
Per Row
02~50P

XX
Contact Plating
Full Of Gold Semi-Gold
A0=0.8u" B0=0.8U"
~
A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

X
Insulator Material:
C: PA9T
D: LCP

M

XXX
Length Of
Terminal

X
Packing
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

X
Journal Number
1: Type1
2: Type2