

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 2.0AMP

Rating Current: 2.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘

Withstanding Voltage: AC 500V/Minute


溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C



P2XX-13XXXXXSXXXX1




L=A+B+H





P2XX-13XXXXRXXXXX1

L=A+B+D+H+1.0





Mating With/配對母座:
F263



Recommended P.C.B Layout



Recommended P.C.B Layout

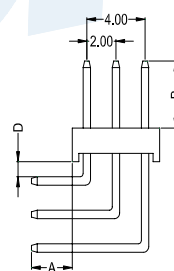

Dimension antitheses list			
ITEM	A	B	H
Standard	2.80	4.00	1.5
Alternate			2.0

Dimension antitheses list				
ITEM	A	B	D	H
Standard	2.80	4.00	0.75	1.5
Alternate				2.0

P 2 1 5 - 1 3

X X

X X

X

X

X X X

X

1

P 2 2 0 - 1 3

No.Of Pins Per Row
02~40P

Contact Plating
Full Of Gold Semi-Gold
A0=0.8u" B0=0.8U"

A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Material:
A:PBT
B:PA6T
C:PA9T
D:LCP

Contact Shape:
S: Straight
R: Right Angle

Length Of Terminal

Packing
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 2.0AMP

Rating Current: 2.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘



Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C


Temperature Range: -40° C to +105° C

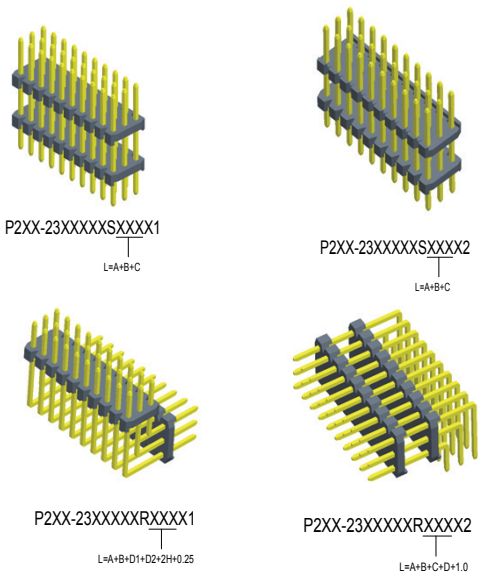




Mating With/配對母座:
F263

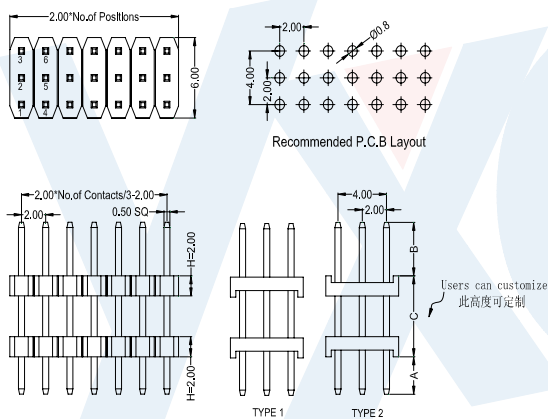

Dimension anitheses list				
ITEM	A	B	C	H
Standard	2.80	4.00		1.5
Alternate				2.0

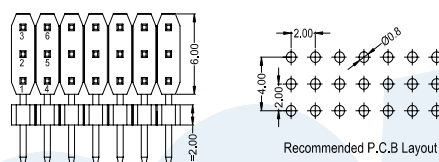

Dimension anitheses list					
ITEM	A	B	D1	D2	H
Standard	2.80	4.00			1.5
Alternate					2.0

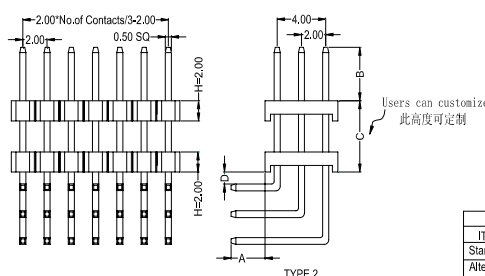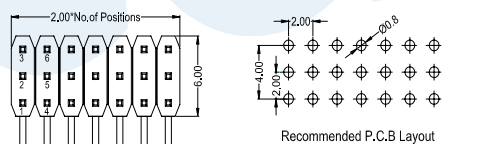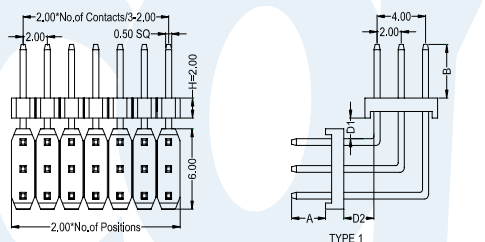

Dimension anitheses list					
ITEM	A	B	C	D	H
Standard	2.80	4.00		0.75	1.5
Alternate					2.0

P 215 - 23

XX

XX

X

X

XXX

X

X

P 220 - 23

No.Of Pins Per Row
02~40P

Contact Plating
Full Of Gold A0=0.8u"
Semi-Gold B0=0.8u"

A9=30u" B9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Material:
A: PBT
B: PA6T
C: PA9T
D: LCP

Contact Shape:
S: Straight
R: Right Angle

Length Of Terminal

Packing
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1
2: Type2

Http://www.yxcon.com

E-mail:yx@yxcon.com

YUXI DONGGUAN (東莞)
YUXI TAIWAN (台灣)

TEL:+86 769 85397456
TEL:+886 3313 2933

FAX:+86 769 85396015
FAX:+886 3313 2935

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 2.0AMP

Rating Current: 2.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C

Temperture Range: -40° C to +105° C






P2XX-14XXXXXSXXXX1
L=A+B+H





P2XX-14XXXXXRXXXX1
L=A+B+D+H+1.0





Mating With/配對母座:
F263/293



Recommended P.C.B Layout



Recommended P.C.B Layout



Dimension antitheses list			
ITEM	A	B	H
Standard	2.80	4.0/6.0	1.5
Alternate			2.0

Dimension antitheses list				
ITEM	A	B	D	H
Standard	2.80	4.0/6.0	0.75	1.5
Alternate				2.0

P 2 1 5 - 1 4
P 2 2 0 - 1 4

XX

XX

X

X

XXX

X

1

No. Of Pins Per Row
02~40P

Contact Plating
Full Of Gold A0=0.8u"
Semi-Gold B0=0.8U"
A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Material:
A:PBT
B:PA6T
C:PA9T
D:LCP

Contact Shape:
S: Straight
R: Right Angle

Length Of Terminal

Packing
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 2.0AMP

Rating Current: 2.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分钟

Withstanding Voltage: AC 500V/Minute


溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C




P2XX-24XXXXX1

$$L=A+B+C$$




P2XX-24XXXXX2

$$L=A+B+C$$



P2XX-24XXXXRX1


$$L=A+B+D+D2+2H+0.25$$





P2XX-24XXXXRX2

$$L=A+B+C+D+1.0$$



Mating With/配對母座:
F263/293





PIN HEADER




Recommended P.C.B Layout



Users can customize
此高度可定制






Recommended P.C.B Layout




TYPE 1

Dimension alternatives list					
ITEM	A	B	D1	D2	H
Standard	2.80	4.0/6.0			1.5
Alternate					2.0



Recommended P.C.B Layout



TYPE 2

Dimension alternatives list					
ITEM	A	B	C	D	H
Standard	2.80	4.0/6.0	0.75		1.5
Alternate					2.0

Dimension alternatives list				
ITEM	A	B	C	H
Standard	2.80	4.0/6.0		1.5
Alternate				2.0

P 2 1 5 - 2 4

P 2 2 0 - 2 4

XX

XX

X

X

XXX

X

X

No. Of Pins
Per Row
02~40P

Contact Plating
Full Of Gold A0=0.8u"
Semi-Gold B0=0.8u"
~
A9=30u" B9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Material:
A: PBT
B: PA6T
C: PA9T
D: LCP

Contact Shape:
S: Straight
R: Right Angle

Length Of Terminal

Packing
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1
2: Type2