





Specifications

备注 (Remark)
1. 材料 (MATERIAL)

壳体: PA6T+30%G, F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G, F UL94V-0, Color: Black
四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN
Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP
Rating Current: 1 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40°C to+105°C
Temperature Range: -40°C to+105°C

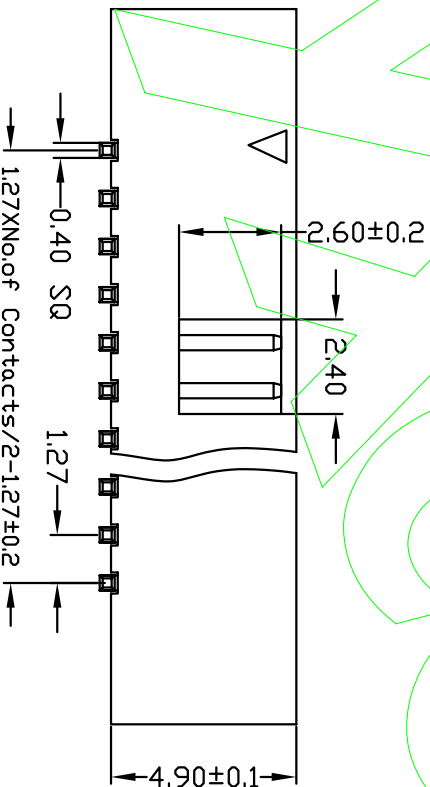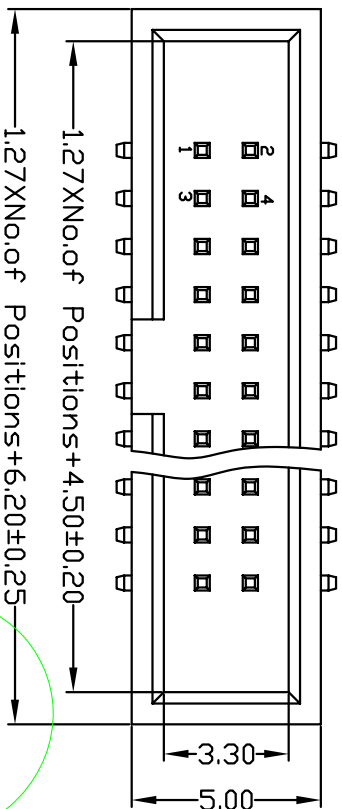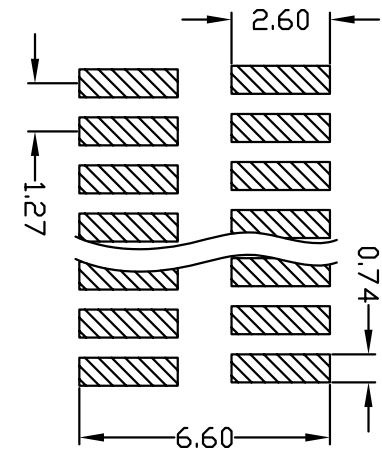

Ordering Information

B349-1 XX XX X M X X 1

NO. OF PINS		CONTACT PLATING	INSULATOR	PACKING
4-100P	Full Of Gold			
A0=0.8u"				
A1=1u"				
A2=1.5u"				
A3=2u"				
A4=3u"				
A5=5u"				
A6=10u"				
A7=15u"				
A8=20u"				
A9=30u"				
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

OPERATION		SCALE		Fit		DESIGN		PART NO.	
X.X	±0.25	UNIT	MM						
X.XX	±0.20	SIZE	A4						
X.XXX	±0.10	SHEET	1/1						
Angle	±3°								
DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.	Customer No.		



东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co.,Ltd.

A

1 2 3 4 5 6 7 8 9 10

H

G

F

E

D

C

B

A