

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

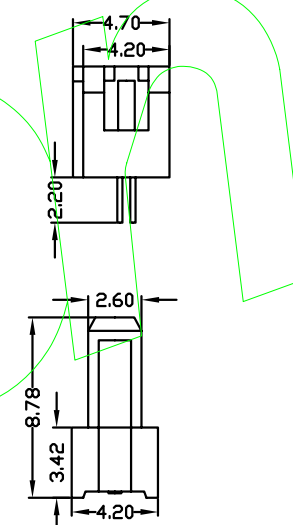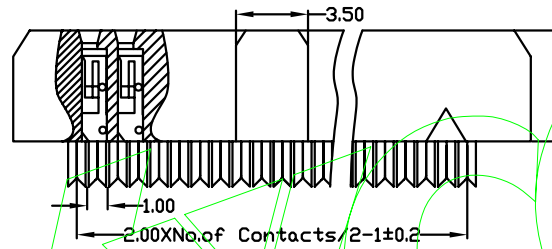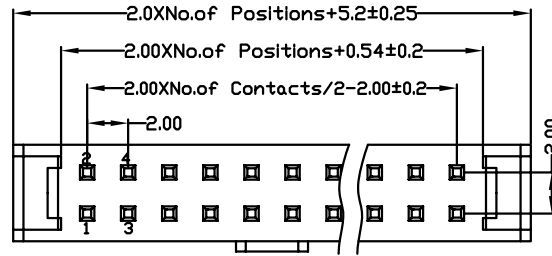

Ordering Information

IDC2 - XX 3 54 XX A T X 2

NO.OF PINS
6-64P

Contact Plating
Full Of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

INSULATOR MATERIAL:
A:PBT

B:Black
G:Grey427
E:Grey413
W:White
U:Blue

OPERATION

X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

SCALE

UNIT	MM
SIZE	A4
SHEET	1/1
PROJ.	☉

Fit

DESIGN	CHECK	APPROVE
--------	-------	---------



东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co.,Ltd.

卢小强

PART NO.

TITLE:

Customer No.

IDC2-XX354XXATX2

2.00 IDC 塑高5.4 弹片式 三件式 带凸点

H

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE

1 2 3 4 5 6 7 8 9 10