

Specifications

Ordering Information

DIP4 - XX 2 32 XX A Y X X

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.






Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

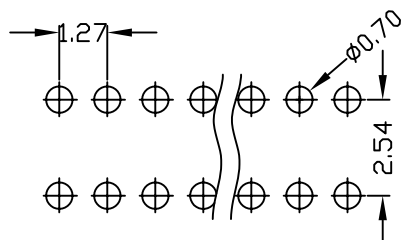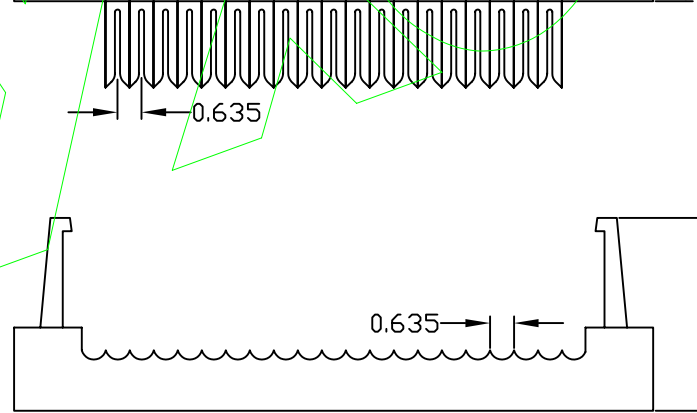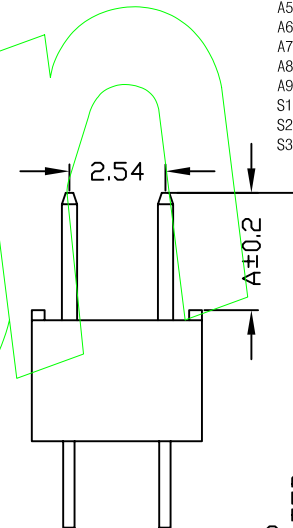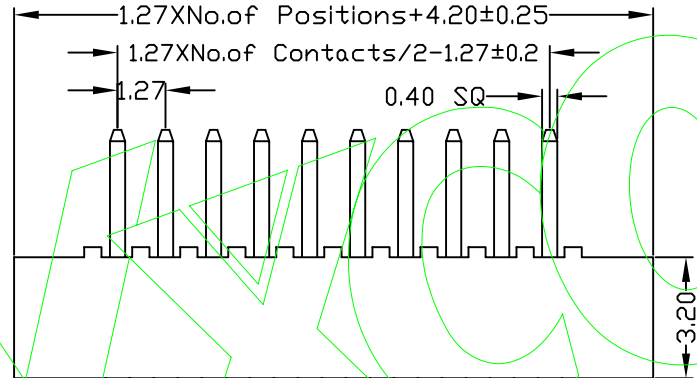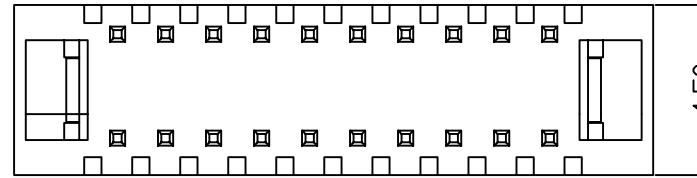

NO. OF PINS 6-80P	Full Of Gold	Semi-gold	INSULATOR MATERIAL:	B:Black
	A0=0.8u"	B0=0.8u"	A:PBT	G:Grey427
	A1=1u"	B1=1u"		E:Grey413
	A2=1.5u"	B2=1.5u"		W:White
	A3=2u"	B3=2u"		U:Blue
	A4=3u"	B4=3u"		
	A5=5u"	B5=5u"		
	A6=10u"	B6=10u"		
	A7=15u"	B7=15u"		
	A8=20u"	B8=20u"		
	A9=30u"	B9=30u"		
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

DIM"A"	PART NO
3.10	DIP4-XX232XXAYX1
1.90	DIP4-XX232XXAYX2

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co., Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	DIP4-XX232XXAYXX
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27*2.54mm DIP 塑高3.2
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.	