

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PPS+30%G. F UL94V-0, 顏色: 黑色

Housing: PPS+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass CuZn 36Pb3 (C3600)

相配針: ϕ 0.47mm

Connecting Pin: ϕ 0.47mm

2. 特性 (characteristics):

額定電流: 1.0AMP


Rating Current: 1.0AMP

接觸阻抗: 10m Ω Max

Contact Resistance: 10m Ω Max



絕緣強度: Min 1000V RMS

Dielectric strength : Min 1000V RMS



RP430-1XX0XGS1001

Mating With/配對母座:
RF4

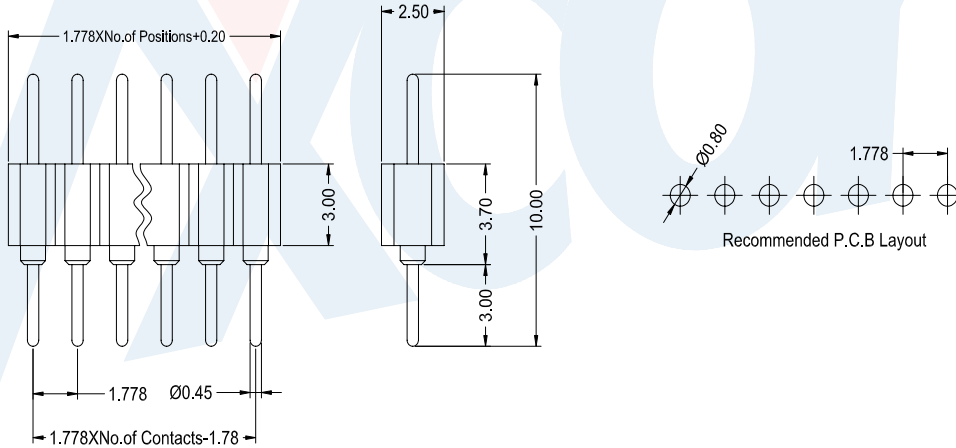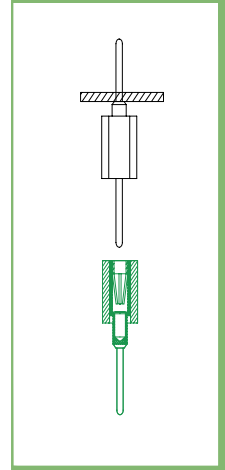

R

ROUND

RP430-1

Height of Housing:
30:3.0mm

XX

No. of Row:
1: Single Row

0

No. of Pins Per Row:
2~32P

X

No. of Array Pitch
0: No Pitch

Contact Plating
A=1u"
B=2u"
~
E=15u"
F=30u"
S=Ordinary Tin Plated
H=Half Gold Plated Tin

G

Insulator Material:
G: PPS

S

100

Length Of Terminal

1