

Specifications

Wafer

備注 (Remark)

1. 材料 (Material)


膠芯: PA66 UL94V-0

Housing: PA66 UL94V-0

端子: 黃銅

Contact: Brass

9812WV-XX-NOSN

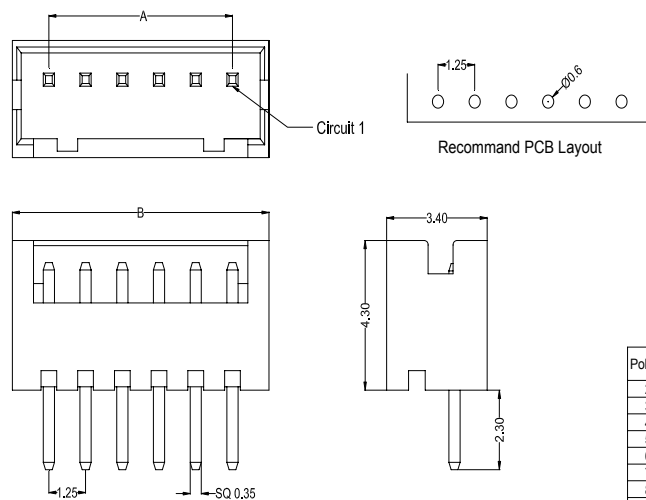

9812WV-XX-NOSN

Poles	Dimensions (mm)	
	A	B
2	1.25	3.75
3	2.50	5.00
4	3.75	6.25
5	5.00	7.50
6	6.25	8.75
7	7.50	10.00
8	8.75	11.25
9	10.00	12.50
10	11.25	13.75
11	12.50	15.00
12	13.75	16.25
13	15.00	17.50
14	16.25	18.75
15	17.50	20.00

9812WV-XX-NOSN	Nylon 66 UL 94V-0	Brass	Tin-Plated	9812H	1,000Pcs
PART NO	Material	Material (Pin)	Finish (Pin)	Mates With SWB Housing	Q'ty/Bag

Housing


備注 (Remark)

1. 材料 (Material)

膠芯: PA66 UL94V-0

Housing: PA66 UL94V-0

9812H-XX-N0

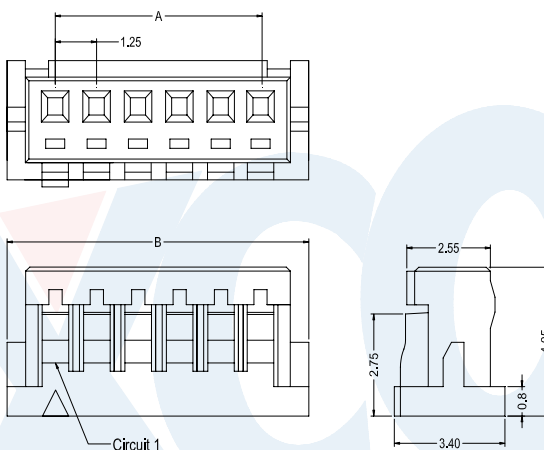

9812H-XX-N0

Poles	Dimensions (mm)	
	A	B
2	1.25	4.15
3	2.50	5.40
4	3.75	6.65
5	5.00	7.90
6	6.25	9.15
7	7.50	10.40
8	8.75	11.65
9	10.00	12.90
10	11.25	14.15
11	12.50	15.40
12	13.75	16.65
13	15.00	17.90
14	16.25	19.15
15	17.50	20.40

9812H-XX-N0	Nylon 66 UL 94V-0	9812T	9812W	1,000Pcs
PART NO	Material	Suitable SWB Terminal	Mates With SWB Wafer	Q'ty/Bag

Terminal


備注 (Remark)

1. 材料 (Material)

端子: 磷青銅

Contact: Phosphor bronze

9812T-PXX

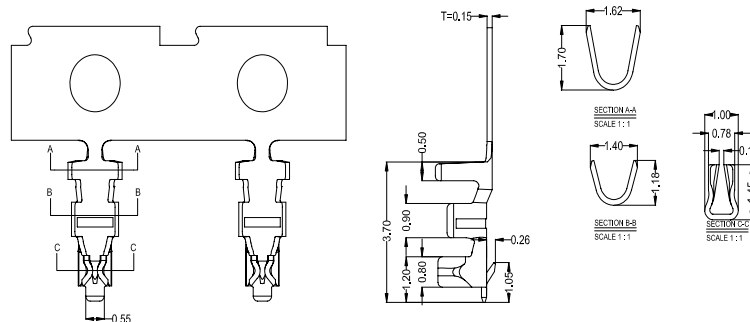

9812T-PXX

9812T-PV01	Phosphor Bronze	AWG#26-30	1.00mm(Max)	Stamping Before Plating: 30-50u" Ni/Whole Gold: Gold Flash	9812H	10,000Pcs
9812T-PSN				Stamping Before Plating: 30-50u" Ni/70-120u" Sn		
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In SWB Housing	Q'ty/Reel