

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30% G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30% G.F UL94V-0, Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -55° C to +125° C

Temperature Range: -55° C to +125° C




F520-11XXXXXMPX1




F520-11XXXXXMPX2



Mating With/配對公座:
P510/P515/P520



FEMALE HEADER

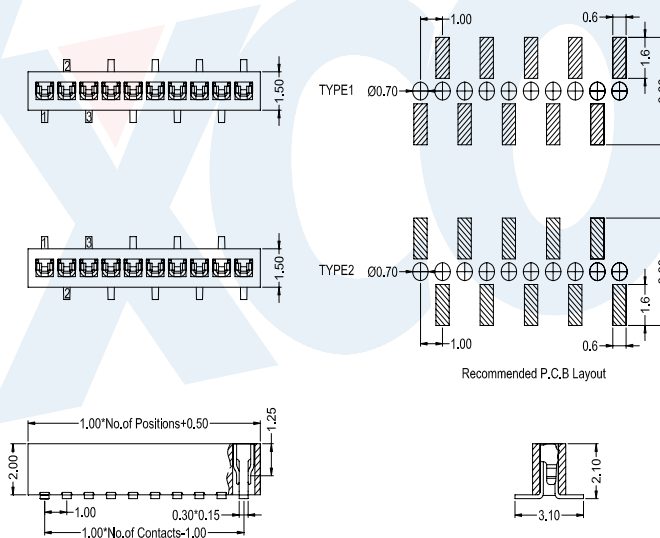

F 5 2 0 - 1 1

XX

XX

X

M

P

X

X

No. Of Pins Per Row
02~50P

Contact Plating
Full Of Gold Semi-Gold
A0=0.8u" B0=0.8U"

A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Material:
B: PA6T
C: PA9T
D: LCP

Packing
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1
2: Type2

[Http://www.yxcon.com](http://www.yxcon.com)

E-mail: yx@yxcon.com

YUXI DONGGUAN (東莞)
YUXI TAIWAN (台灣)

TEL:+86 769 85397456
TEL:+886 3313 2933

FAX:+86 769 85396015
FAX:+886 3313 2935

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30% G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30% G. F UL94V-0,

Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -55° C to +125° C


Temperature Range: -55° C to +125° C




F521-11XXXXXSUX1




F521-11XXXXXMUX1



F521-11XXXXXMUX2




F521-11XXXXXZUX1


















F521-11XXXXXZUX2

Mating With/配對公座:
P510/P515/P520



Mating Pin Long
(建議接觸端長度)
B=1.80mm

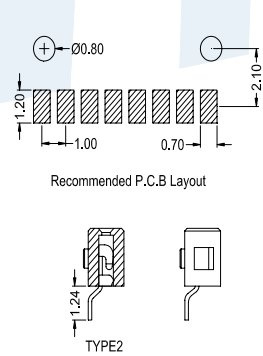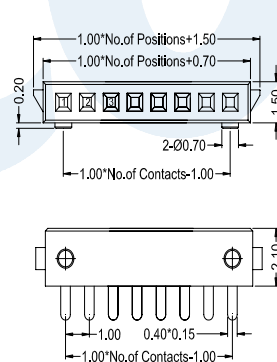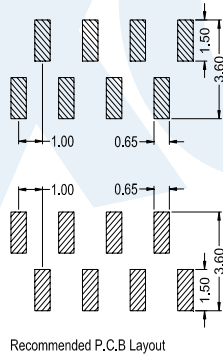

F 5 2 1 - 1 1

X X

X X

X

X

U

X

X

No.Of Pins Per Row
02~50P

Contact Plating

Full Of Gold A0=0.8u"
Semi-Gold B0=0.8U"
~ ~

Insulator Material:

B:PA6T
C:PA9T
D:LCP

Contact Shape:

S: Straight
M: SMT
Z: 90° SMT

Packing

A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

Journal Number

1: Type1
2: Type2

A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30% G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30% G.F UL94V-0,

Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -55° C to +125° C

Temperature Range: -55° C to +125° C




F526-11XXXXXMUX1





F526-11XXXXXMUX2



Mating With/配對公座:
P510/P515/P520

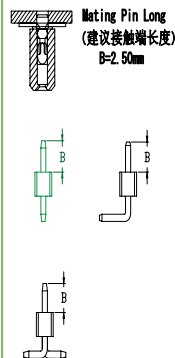

FEMALE HEADER

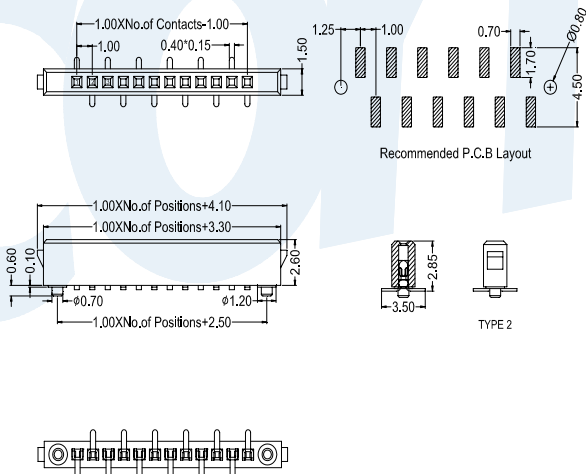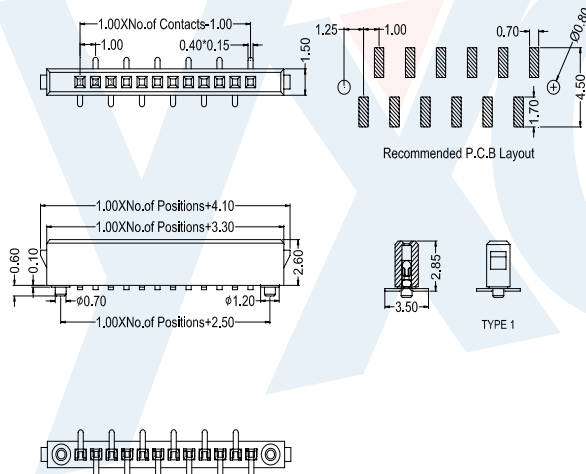

F 5 2 6 - 1 1

X X

No. Of Pins Per Row
02~50P

X X

Contact Plating

Full Of Gold Semi-Gold
A0=0.8u" B0=0.8U"
~
A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

X

Insulator Material:

B: PA6T
C: PA9T
D: LCP

M

U

Packing

A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

X

Journal Number

1: Type1
2: Type2

X