

Specifications

Ordering Information

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 0.75 AMP

Rating Current: 0.75 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperature Range: -40°C to +105°C

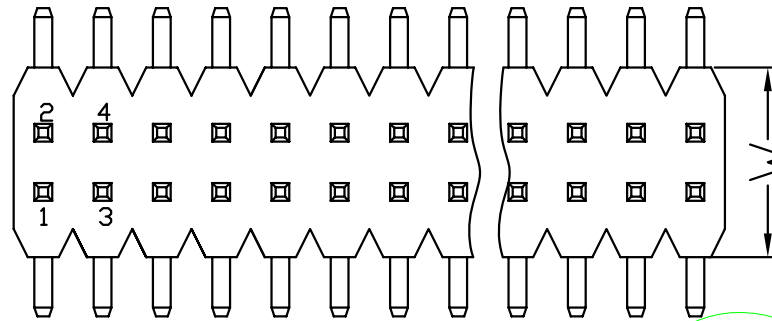

P5XX-12 XX XX X M XXX X 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating		INSULATOR MATERIAL: OF	LENGTH OF TERMINAL	PACKING
		Full of Gold	Semi-gold			
10:1.0mm	2-50P	A0=0.8u"	B0=0.8U"	B:PA6T	D:LCP	A:PE Bag
15:1.5mm		A1=1u"	B1=1U"	C:PA9T		B:Tape & Reel
21:2.1mm		A2=1.5u"	B2=1.5U"	D:LCP		C:Tube
		A3=2u"	B3=2U"			D:Tube+CAP
		A4=3u"	B4=3U"			E:Tray
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
	A9=30u"	B9=30U"				
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

YXCON

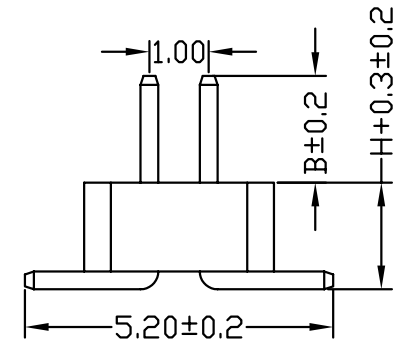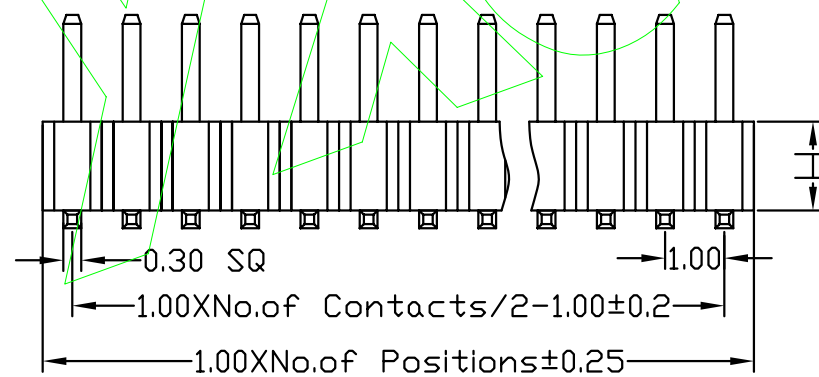

Dimension antitheses list						
ITEM	B	D	H		W	
Standard	1.8	0	1.0	1.5	2.1	3.2
Alternate						

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co., Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强		
				X.XXX	±0.10	SHEET	1/1	CHECK	PART NO.		
				Angle	±3°			APPROVE	TITLE:	1.00mm 排针 双排 SMT	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.	