

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C


Temperture Range: -40°C to+105°C

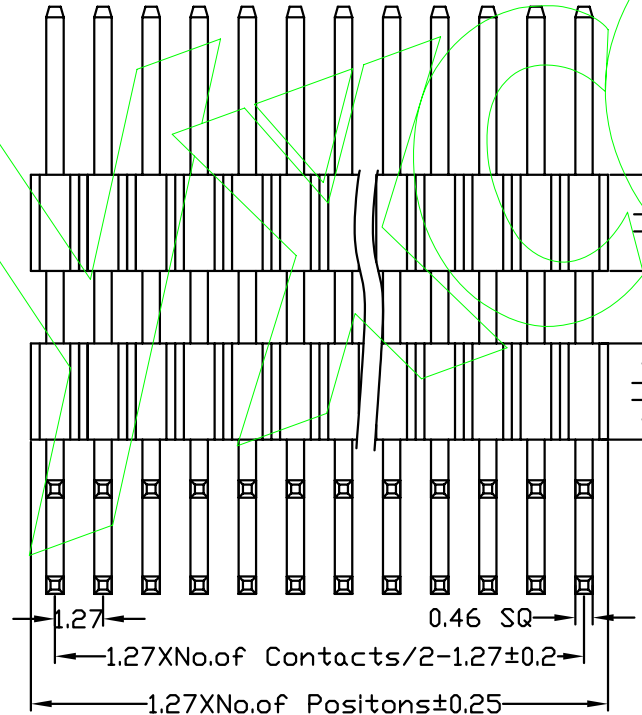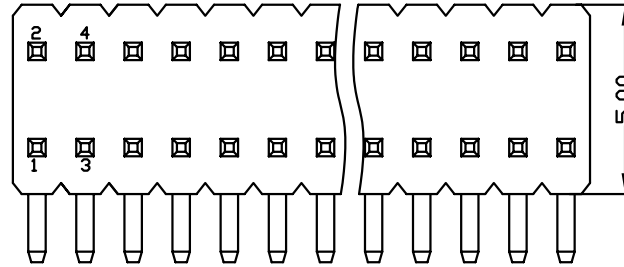

Ordering Information

P4XX-22 XX XX X R XXX X 1

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Full Of Gold	Plating Semi-gold	INSULATOR MATERIAL: OF	LENGTH OF TERMINAL	PACKING
17:1.7mm 25:2.54mm	2-50P	A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	B:PA6T C:PA9T D:LCP		A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature				

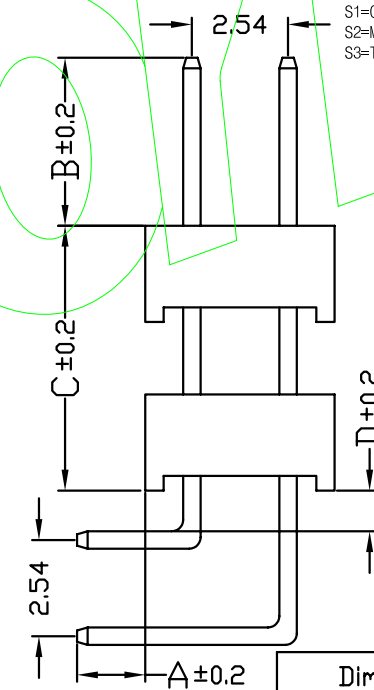

Dimension antitheses list

ITEM	A	B	D	H	C
Standard	1.8	2.8	2.8	6.0	0
Alternate					

OPERATION

X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

SCALE

UNIT

Fit

MM

Yxcon

东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co.,Ltd.

卢小强

PART NO.

P4XX-22XXXXXXX1

TITLE:

1.27mm*2.54 双排针 双塑 90度

Customer No.

REV DATE MODIFICATION DESCRIPTION CHANGE APPROVE

1 2 3 4 5 6 7 8 9 10