

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.





温度范围: -40°C to+105°C

Temperature Range: -40°C to+105°C

Ordering Information

P3XX-22 XX XX X S XXX X 2

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL: OF	LENGTH TERMINAL	PACKING
16: 1.6mm	2-50P	Full Of Gold	B: PA6T		A: PE Bag
20: 2.0mm		A0=0.8u"	C: PA9T		B: Tape & Reel
25: 2.54mm		A1=1u"	D: LCP		C: Tube
		A2=1.5u"			D: Tube+CAP
		A3=2u"			E: Tray
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

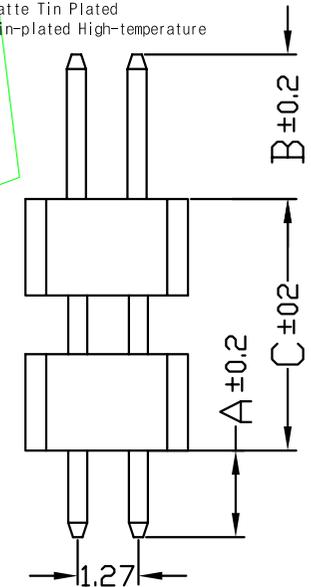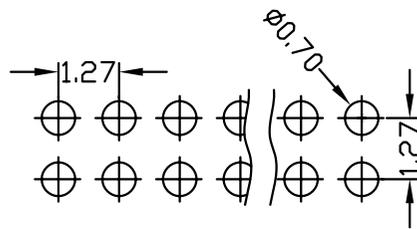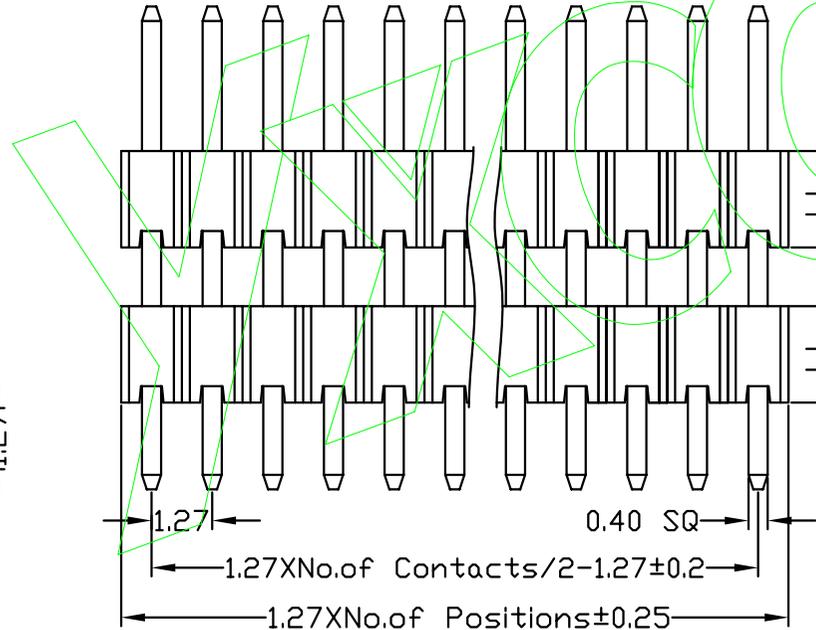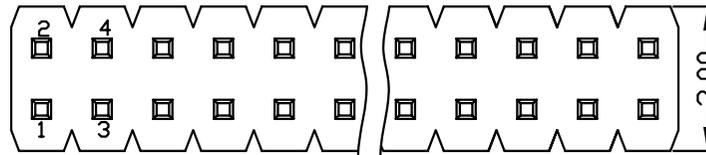

Dimension antitheses list							
ITEM	C	A	B		H		
Standard		1.8	1.8	3.0	4.0	1.6	2.0 2.54
Alternate							

				OPERATION	SCALE	Fit	东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.			
				X.X ±0.40	UNIT	MM				
				X.XX ±0.25	SIZE	A4	DESIGN	卢小强	PART NO.	P3XX-22XXXXXXX2
				X.XXX ±0.15	SHEET	1/1	CHECK		TITLE:	1.27mm 排针 双排 双塑 180度
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	PROJ.	APPROVE		Customer No.	