


# Specifications

备注 (Remark)  
 1. 材料 (MATERIAL)  
 胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.  
 Housing: PA6T+30%G.F UL94V-0, Color: Black  
 四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN  
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL  
 30u" MIN NICKEL UNDERPLATING OVER ALL




2. 特性 (characteristics):  
 额定电流: 2 AMP  
 Raring Current: 2 AMP.  
 接触阻抗: 20 mΩ MAX.  
 Contact Resistance: 20 mΩ MAX.  
 绝缘阻抗: 1000 MΩ MIN.  
 Insulating Resistance: 1000 MΩ MIN.  
 耐电压: AC 500V.  
 Withstanding Voltage: AC 500V.  
 温度范围: -40°C to +105°C  
 Temperture Range: -40°C to +105°C

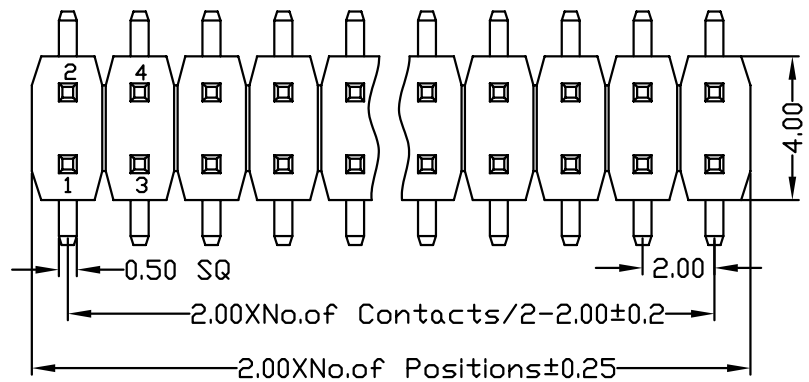

# Ordering Information

P2XX-22 XX XX X M XXX X 2

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
10: 1.0mm 15: 1.5mm 20: 2.0mm	2-40P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	B: PA6T C: PA9T D: LCP	A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

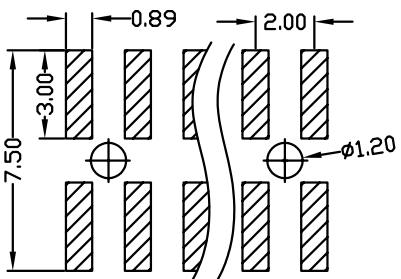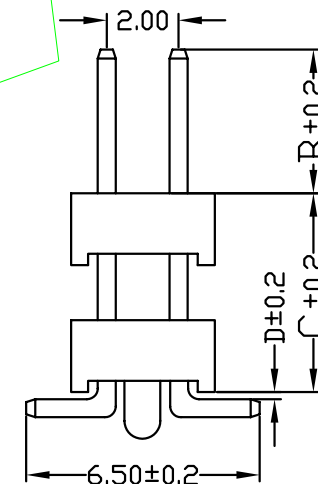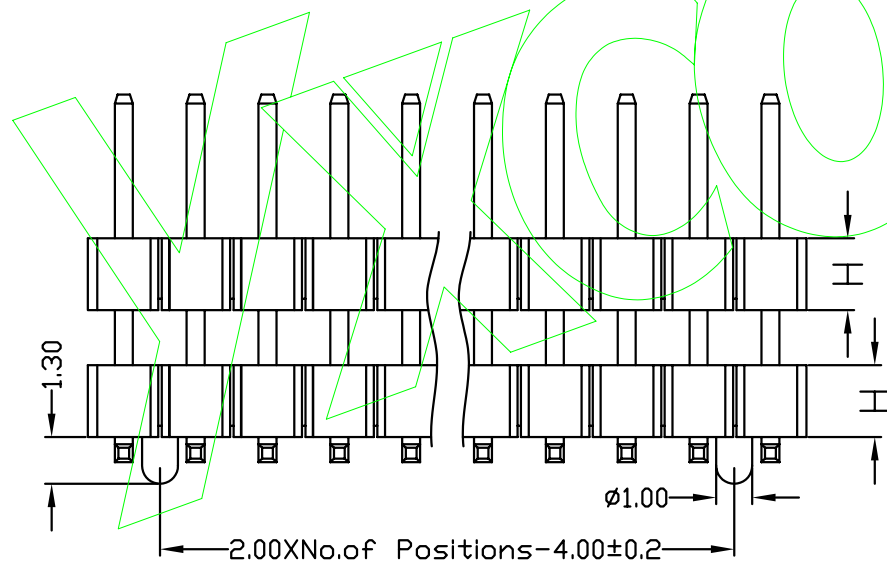

ITEM	B	H	D	C
Standard	2.8 4.0	1.0 1.5 2.0	0	0.75
Alternate				

				OPERATION	SCALE	Fit	东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.							
				X.X ±0.25	UNIT	MM								
				X.XX ±0.20	SIZE	A4					DESIGN	卢小强	PART NO.	P2XX-22XXXXXXX2
				X.XXX ±0.10	SHEET	1/1					CHECK		TITLE:	2.0mm 双排针 双塑 SMT 带柱
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°	PROJ.	APPROVE	Customer No.						
					DIM TOL									