

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C



Temperature Range: -40°C to+105°C

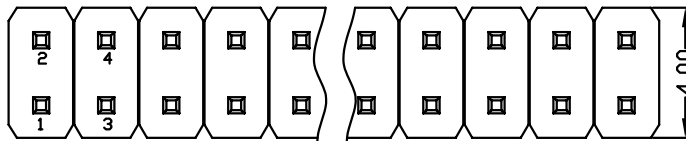

Ordering Information

P220-12 XX XX X Z XXX X 1

HEIGHT OF HOUSING 20±2.0mm	NO. OF PINS PER ROW 2-40P	Contact Plating		INSULATOR MATERIAL: B: PA6T C: PA9T D: LCP	LENGTH OF TERMINAL	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tray+CAP E: Tray
		Full Of Gold	Semi-gold			
		A0=0.8u"	B0=0.8U"			
		A1=1u"	B1=1U"			
		A2=1.5u"	B2=1.5U"			
		A3=2u"	B3=2U"			
		A4=3u"	B4=3U"			
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
A8=20u"	B8=20U"					
A9=30u"	B9=30U"					
S1=Ordinary Tin Plated		S2=Matte Tin Plated		S3=Tin-plated High-temperature		

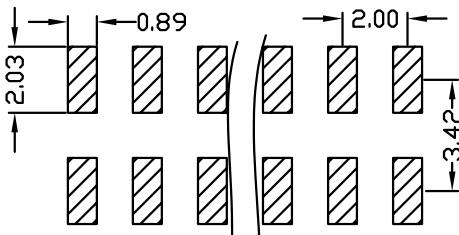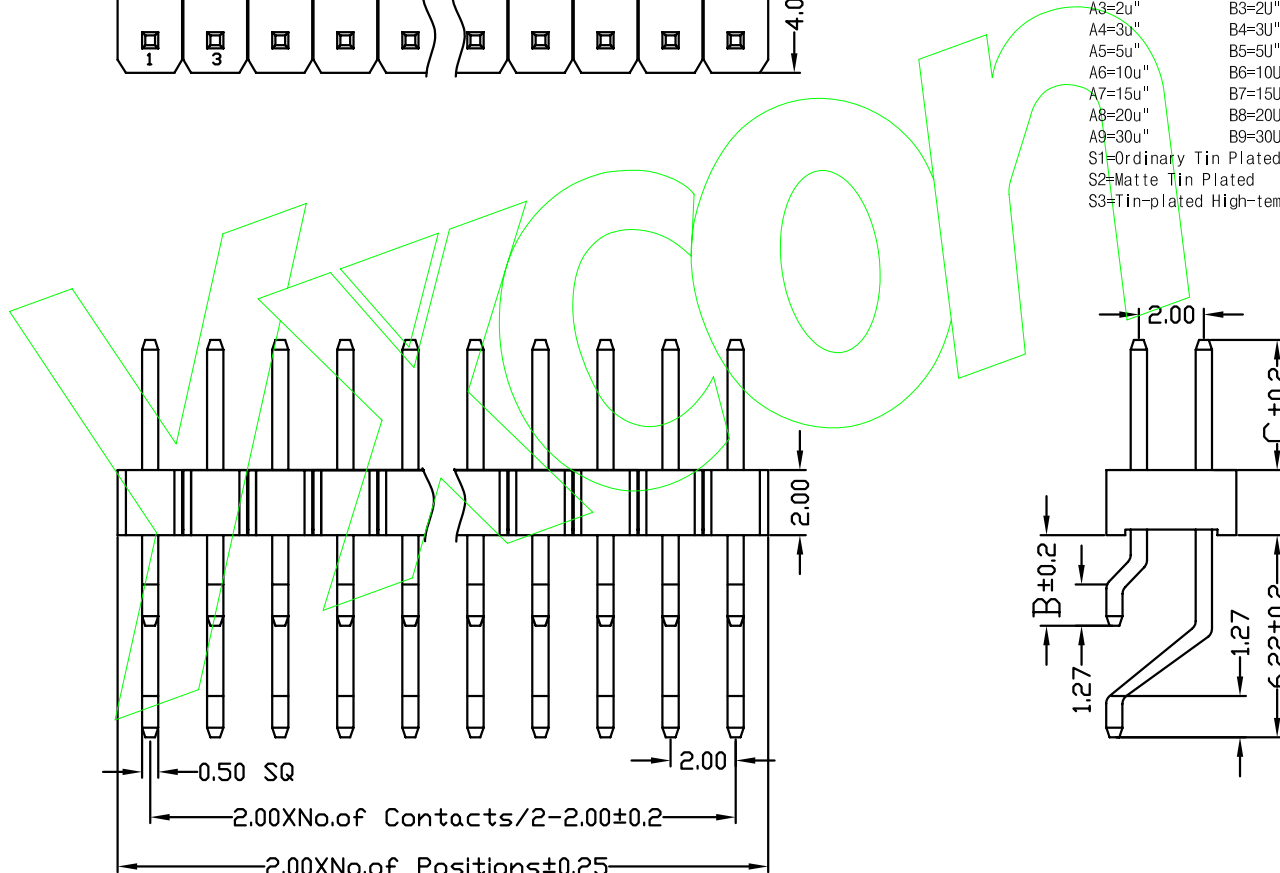

ITEM	B	C
Standard	2.80	4.0
Alternate		

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P220-12XXXXXX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0mm 双排针 塑高2.0 卧式SMT
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.	