

A 备注 (Remark)




1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G. F UL94V-0, Color: Black
四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

B

2. 特性 (characteristics):

额定电流: 2 AMP
Rating Current: 2 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40°C to+105°C
Temperature Range: -40°C to+105°C

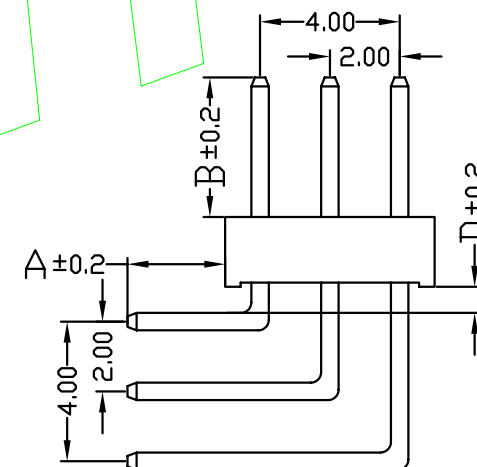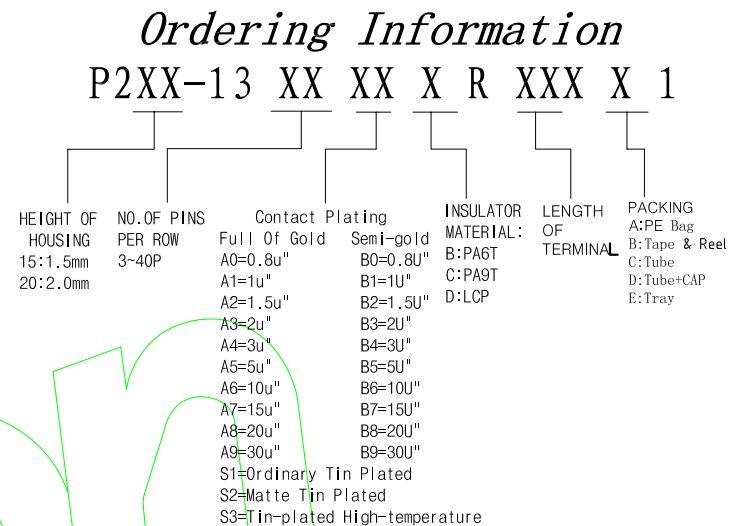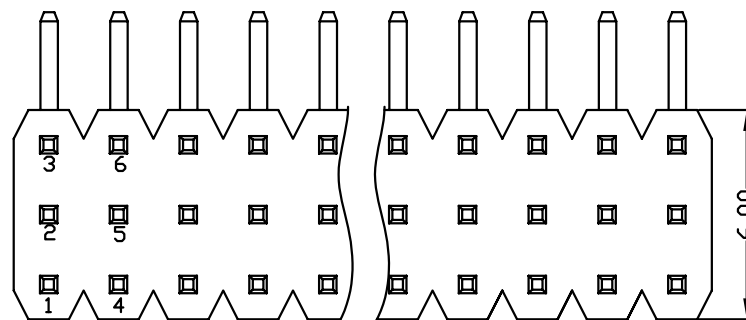

Dimension antitheses list					
ITEM	A	B	H		D
Standard	2.8	4.0	1.5	2.0	0.75
Alternate					

						OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.			
						X.X	±0.25	UNIT		MM				
						X.XX	±0.20	SIZE	A4	DESIGN		卢小强	PART NO.	P2XX-13XXXXRXXXX1
						X.XXX	±0.10							
						Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.0mm 排针 三排 90度	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	