

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.


耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C


TYPE 1

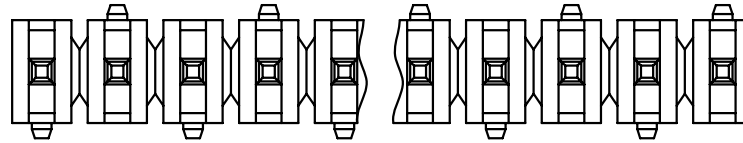



TYPE 2

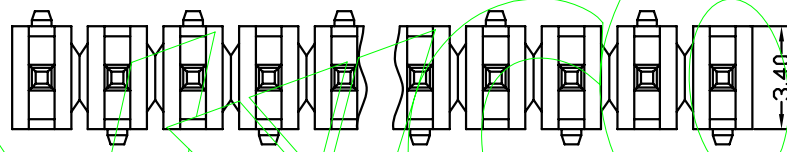

TYPE 1




TYPE 2

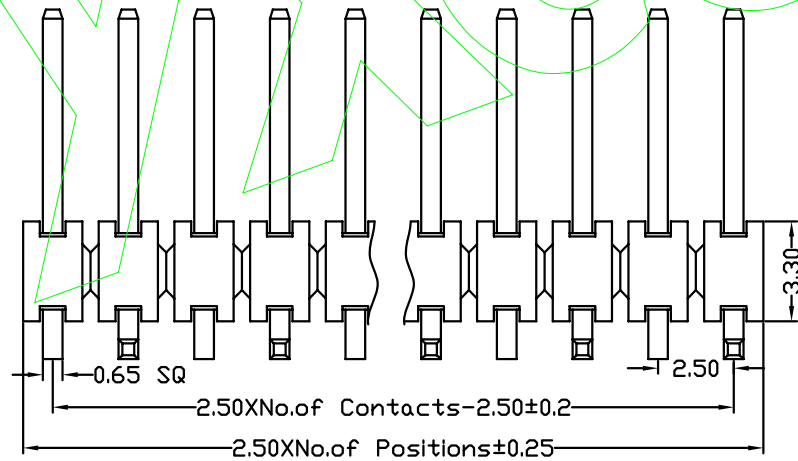

Ordering Information

P033-11 XX XX X M 128 X X

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating		INSULATOR MATERIAL	LENGTH OF TERMINAL	PACKING	1:TYPE1
33:3.3mm	1~40P	Full Of Gold	Semi-gold	B: PA6T	A: PE Bag	A: PE Bag	2:TYPE2
		A0=0.8u"	B0=0.8u"	C: PA9T	B: Tape & Reel	B: Tape & Reel	
		A1=1u"	B1=1u"	D: LCP	C: Tube	C: Tube	
		A2=1.5u"	B2=1.5u"		D: Tube+CAP	D: Tube+CAP	
		A3=2u"	B3=2u"		E: Tray	E: Tray	
		A4=3u"	B4=3u"				
		A5=5u"	B5=5u"				
		A6=10u"	B6=10u"				
		A7=15u"	B7=15u"				
		A8=20u"	B8=20u"				
		A9=30u"	B9=30u"				
		S1=Ordinary Tin Plated					
		S2=Matte Tin Plated					
		S3=Tin-plated High-temperature					

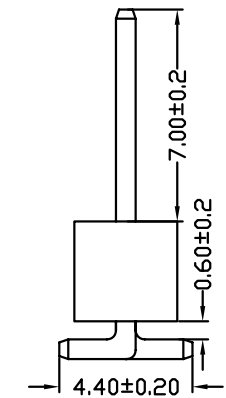

OPERATION		SCALE	Fit
X.X	±0.25	UNIT	MM
X.XX	±0.20	SIZE	A4
X.XXX	±0.10	SHEET	1/1
Angle	±3°	CHECK	
DIM	TOL	PROJ.	APPROVE

Yxcon 东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co.,Ltd.

卢小强 PART NO. P033-11XXXXXM128XX

TITLE: 2.50mm 单排针 塑高3.3 SMT L=12.8

Customer No.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				