

Specifications


备注 (Remark)
 1. 材料 (MATERIAL)
 胶芯: LCP+30%G. F UL94V-0, 颜色: 黑色.
 Housing: LCP+30%G. F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 镀普通锡
 Contact: Brass, ORDINARY TIN PLATED
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 8 AMP
 Raring Current: 8 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40° C to +105° C
 Temperture Range: -40° C to +105° C

Ordering Information

P732-11 XX XX D R XXX X 1

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating		INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
32:3.2mm	1-30P	Full Of Gold	Semi-gold	D:LCP		A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		A0=0.8u"	B0=0.8u"			
		A1=1u"	B1=1u"			
		A2=1.5u"	B2=1.5u"			
		A3=2u"	B3=2u"			
		A4=3u"	B4=3u"			
		A5=5u"	B5=5u"			
		A6=10u"	B6=10u"			
		A7=15u"	B7=15u"			
		A8=20u"	B8=20u"			
		A9=30u"	B9=30u"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

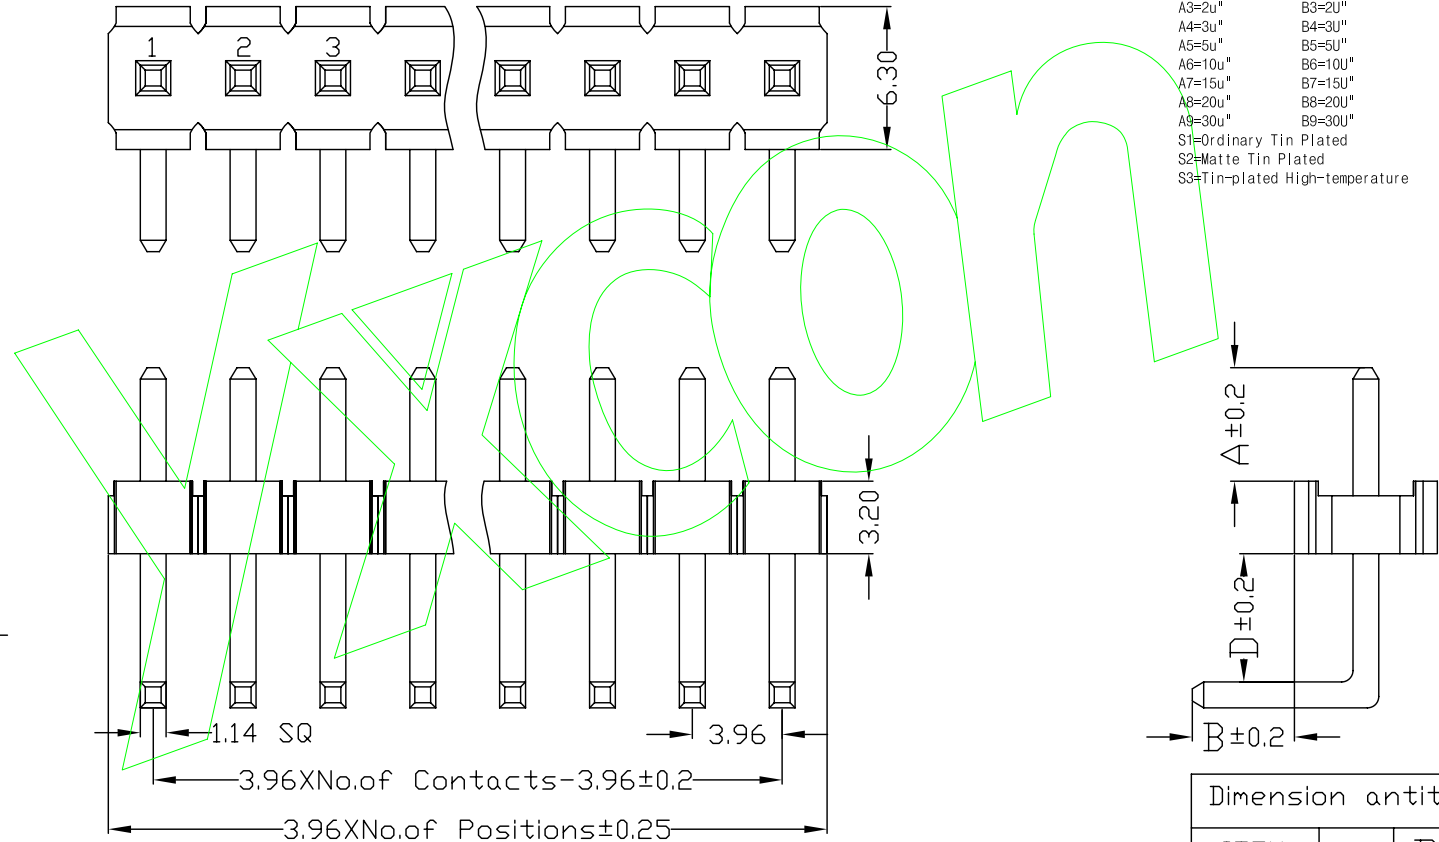

ITEM	A	B	D	
Standard	2.54	4.5	0.60	5.65
Alternate				

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	黄彦宁	PART NO.	P732-11XXXXRXXXX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	3.96mm 单排针 塑高3.2 90度
				Angle	±3°	PROJ.	☉	APPROVE		Customer No.	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE						