

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C


Temperature Range: -40°C to+105°C

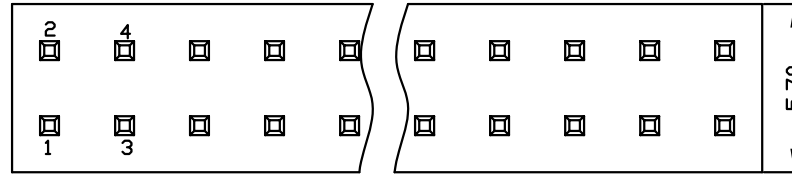

Ordering Information

P143-12 XX XX X S 133 X 1

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
43:4.30mm	2~40P	Full Of Gold	A: PBT		A: PE Bag
		A0=0.8u"	B: PA6T		B: Tape & Reel
		A1=1u"	C: PA9T		C: Tube
		A2=1.5u"	D: LCP		D: Tube+CAP
		A3=2u"			E: Tray
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

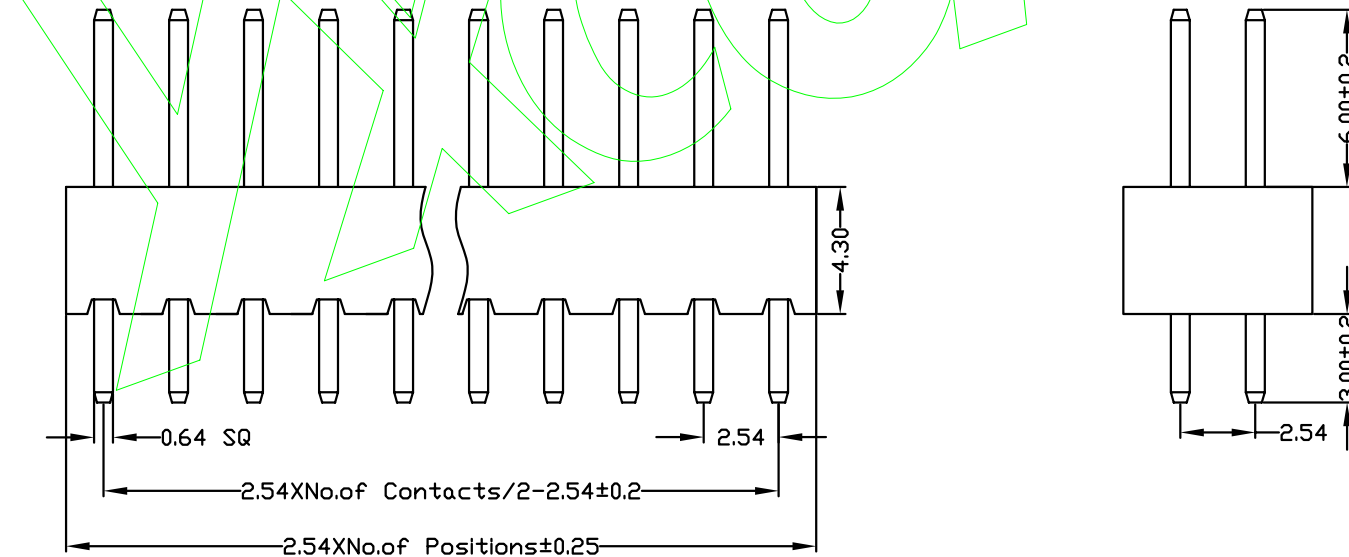

OPERATION

SCALE

Fit

X.X ±0.25

UNIT

MM

X.XX ±0.20

SIZE

A4

DESIGN

卢小强

PART NO.

P143-12XXXXXS133X1

X.XXX ±0.10

SHEET

1/1

CHECK

TITLE:

2.54mm 双排针 塑高4.3 180度 L=13.3

Angle ±3°

APPROVE

Customer No.

DIM TOL

PROJ.

APPROVE

Customer No.

Yxcon 东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co.,Ltd.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.
-----	------	--------------------------	--------	---------	-----	-----	-------	---------	--------------