

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分钟

Withstanding Voltage: AC 500V/Minute


溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C




P310-12XXXXXSXXXX1

$$L=A+B+1.0$$




P310-12XXXXRXXXXX1

$$L=A+B+D+2.0$$



P310-12XXXXMXXXXX1


$$L=B+D+(W-1.27)/2+1.0$$







P310-12XXXXMXXXX2

$$L=B+D+(W-1.27)/2+1.0$$



Mating With/配對母座:
F320/F321/F334/F335/F343

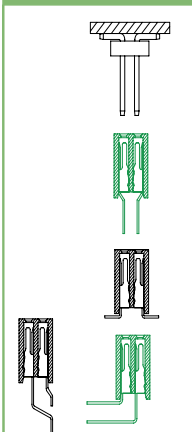

Dimension antitheses list			
ITEM	A	B	H
Standard	1.8	1.8/3.0/4.0/6.0	0.8
Alternate			1.0

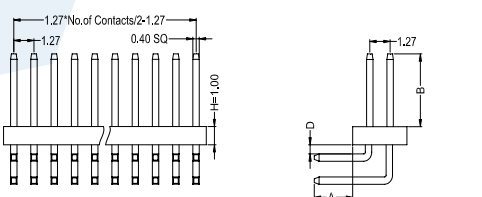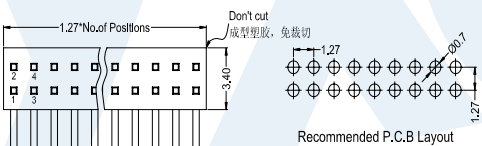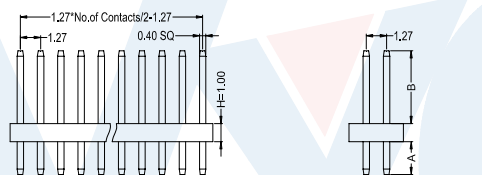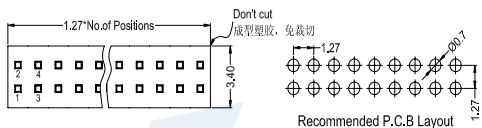

Dimension antitheses list				
ITEM	A	B	D	H
Standard	2.4	1.8/3.0/4.0/6.0	1.0	0.8
Alternate				1.0

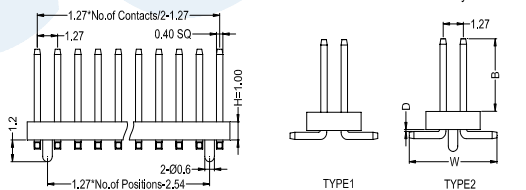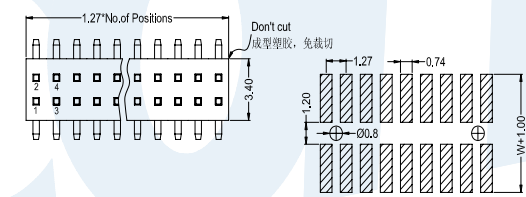

Dimension antitheses list				
ITEM	B	D	W	H
Standard	1.8/3.0/4.0/6.0	0.1	5.5	0.8
Alternate				1.0

P 308-12
P 310-12

XX

XX

X

X

XXX

X

X

No. Of Pins Per Row
02~50P

Contact Plating
Full Of Gold
A0=0.8u"
~
A9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Material:
C:PA9T
D:LCP

Contact Shape:
S: Straight
R: Right Angle
M: SMT

Length Of Terminal
Packing
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1
2: Type2

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min






Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C

Temperture Range: -40° C to +105° C










Mating With/配對母座:
F320/F321/F334/F335/F343

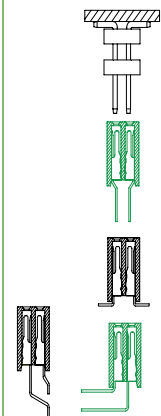

Dimension antitheses list				
ITEM	A	B	C	H
Standard	1.80	1.8/3.0/4.0/6.0		0.8
Alternate				1.0

Dimension antitheses list					
ITEM	A	B	C	D	H
Standard	2.40	1.8/3.0/4.0/6.0			1.00
Alternate					1.0

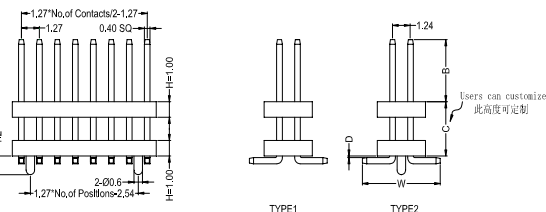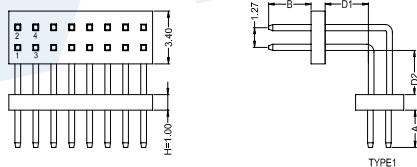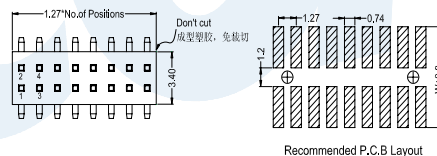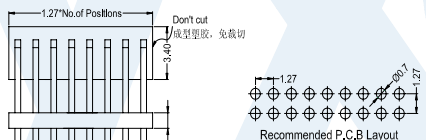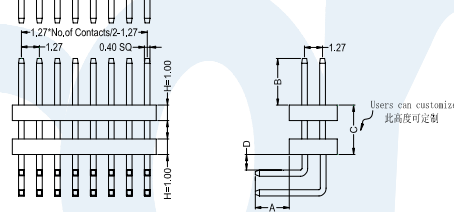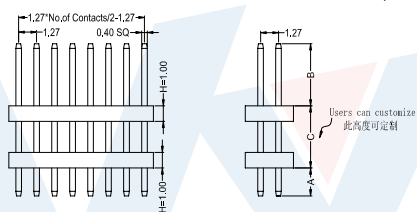

Dimension antitheses list				
ITEM	A	B	D1	D2
Standard	2.40	1.8/3.0/4.0/6.0		
Alternate				

Dimension antitheses list					
ITEM	B	C	D	W	H
Standard	1.8/3.0/4.0/6.0		0.10	5.50	0.8
Alternate					1.0

P 308-22
P 310-22

XX

XX

X

X

XXX

X

X

No. Of Pins Per Row
02-50P

Contact Plating
Full Of Gold A0=0.8u"
Semi-Gold B0=0.8U"

Insulator Material:
C: PA9T
D: LCP

Contact Shape:
S: Straight
R: Right Angle
M: SMT

Length Of Terminal
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1
2: Type2

A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分钟

Withstanding Voltage: AC 500V/Minute


溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C



P310-22XXXXXXZXXX1



$$L=B1+D1+D2+(W-1.27)/2-0.67$$



P310-22XXXXXXZXXX2

$$L=B1+D1+D2+(W-1.27)/2-0.67$$

Mating With/配對母座:
 F320/F321/F334/F335/F343

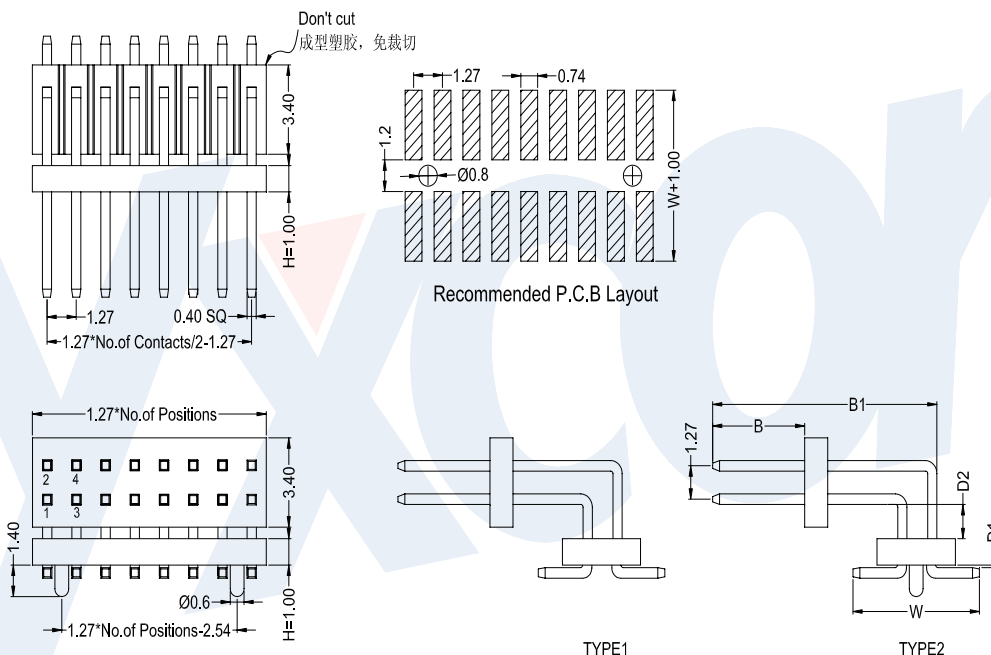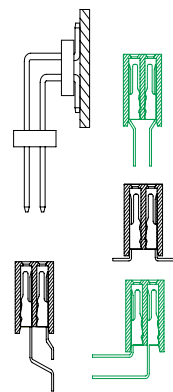

Dimension antitheses list						
ITEM	B	B1	D1	D2	W	H
Standard	1.8/3.0/4.0/6.0				5.50	0.8
Alternate						1.0

P 308-22
 P 310-22

XX
 No. Of Pins
 Per Row
 02~50P

XX
 Contact Plating
 Full Of Gold
 A0=0.8u"
 ~
 A9=30u"
 S1=Ordinary Tin Plated
 S2=Matte Tin Plated
 S3=Tin-plated High-temperature

X
 Insulator Material:
 C:PA9T
 D:LCP

Z

XXX
 Length Of
 Terminal
 A:PE Bag
 B:Tape & Reel
 C:Tube
 D:Tube+CAP
 E:Tray

X
 Journal Number
 1:Type1
 2:Type2

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘

Withstanding Voltage: AC 500V/Minute


溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C




P3XX-12XXXXXSXXXX1

$$L=A+B+H$$




P3XX-12XXXXXRXXXX1

$$L=A+B+D+H+1.06$$



P3XX-12XXXXMXXXX1


$$L=B+D+(W-1.27)/2+H$$







P3XX-12XXXXMXXXX2

$$L=B+D+(W-1.27)/2+H$$



Mating With/配對母座:
F320/F321/F334/F335/F343

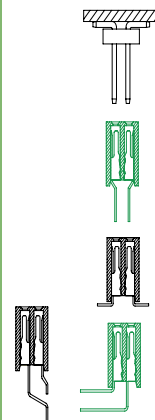

Dimension alternatives list				
ITEM	A	B	H	
Standard	1.8	1.8/3.0/4.0/6.0	0.8	1.5
Alternate			1.0	

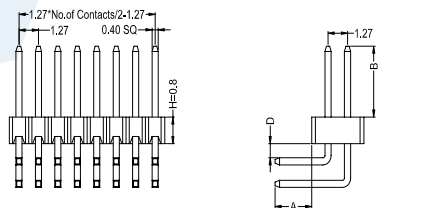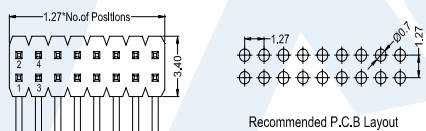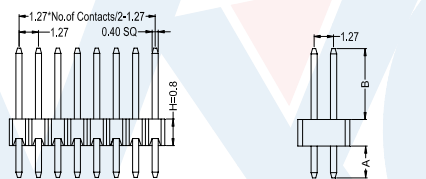

Dimension alternatives list				
ITEM	A	B	D	H
Standard	2.4	1.8/3.0/4.0/6.0	0.8	0.8/1.5
Alternate				1.0

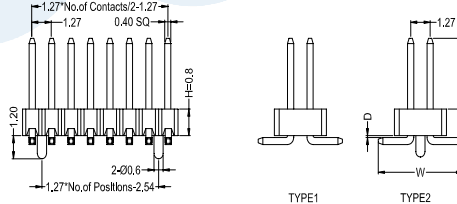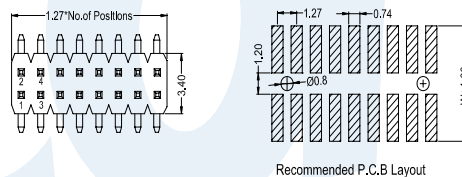

Dimension alternatives list				
ITEM	B	D	W	H
Standard	1.8/3.0/4.0/6.0	0.1	5.5	0.8/1.5
Alternate				1.0

P 308 - 12
P 310 - 12
P 315 - 12

XX
No. Of Pins
Per Row
02~50P

XX
Contact Plating
Full Of Gold A0=0.8u"
Semi-Gold B0=0.8u"
~
A9=30u" B9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

X
Insulator Material:
B:PA6T
C:PA9T
D:LCP

X
Contact Shape:
S: Straight
R: Right Angle
M: SMT

XXX
Length Of
Terminal

X
Packing
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

X
Journal Number
1: Type1
2: Type2

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分钟

Withstanding Voltage: AC 500V/Minute


溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C




P3XX-22XXXXXSXXX1

$L=A+B+C$




P3XX-22XXXXRXXXX1

$L=A+B+D+D_1+2H+0.2$




P3XX-22XXXXRXXX2

$L=A+B+C+D+1.06$



P3XX-22XXXXMXXX1


$L=B+D+C+(W-1.27)/2$







P3XX-22XXXXMXXX2

$L=B+D+C+(W-1.27)/2$

Mating With/配對母座:
F320/F321/F334/F335/F343

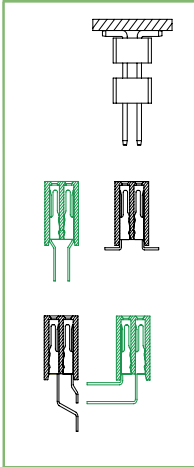


Dimension antheses list				
ITEM	A	B	C	H
Standard	1.80	3.00	4.00	1.0
Alternate		6.00		





Recommended P.C.B Layout


Dimension antheses list				
ITEM	B	C	D	W
Standard	1.80	3.00	0.10	5.50
Alternate		6.00		



Dimension antheses list				
ITEM	A	B	D1	D2
Standard	2.50	1.50	3.00	4.00
Alternate			6.00	





TYPE 1




TYPE 1




Dimension antheses list				
ITEM	A	B	C	D
Standard	2.50	1.50	3.00	4.00
Alternate			6.00	



TYPE 2



TYPE 2



P 308-22
P 310-22
P 315-22

XX

XX

X

X

XXX

X

X

No.Of Pins Per Row
02~50P

Contact Plating
Full Of Gold
A0=0.8u"
~
A9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Material:
B:PA6T
C:PA9T
D:LCP

Contact Shape:
S: Straight
R: Right Angle
M: SMT

Length Of Terminal
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1
2: Type2

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C








Temperature Range: -40° C to +105° C

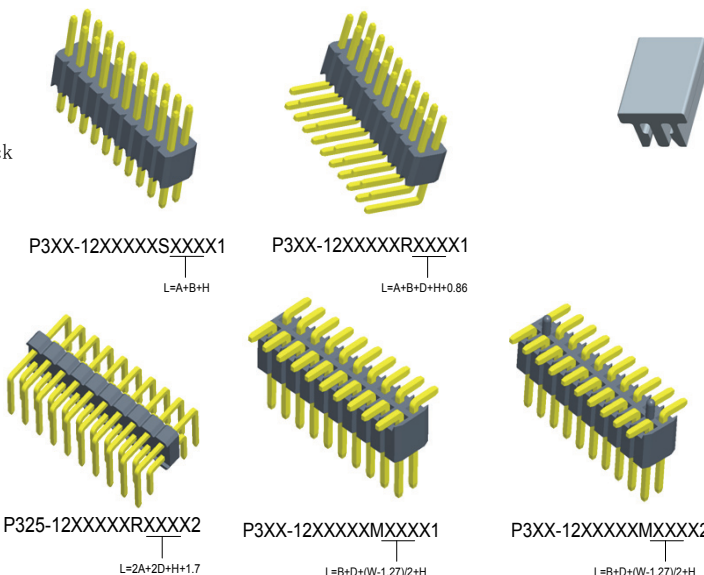








Mating With/配對母座:
F320/F321/F334/F335/F343

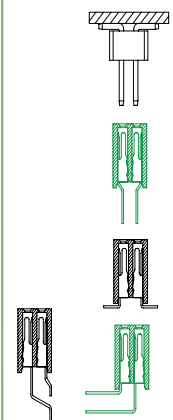

Dimension anitheses list				
ITEM	A	B	H	
Standard	1.80	1.8/3.0/4.0/6.0	1.6	2.5
Alternate			2.0	



Dimension anitheses list					
ITEM	W	D	A	H	
Standard	5.0	6.0	1.25/1.75/2.6	1.6	2.5
Alternate				2.0	



Dimension anitheses list				
ITEM	A	B	D	H
Standard	2.50	1.8/3.0/4.0/6.0	0.80	1.6 2.5
Alternate				2.0

Dimension anitheses list				
ITEM	D	B	W	H
Standard	0.10	1.8/3.0/4.0/6.0	5.50	1.6 2.5
Alternate				2.0

P 3 1 6 - 1 2
P 3 2 0 - 1 2
P 3 2 5 - 1 2

XX

No. Of Pins
Per Row
02-50P

XX

Contact Plating
Full Of Gold A0=0.8u"
Semi-Gold B0=0.8U"
~
A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

X

Insulator Material:
B: PA6T
C: PA9T
D: LCP

X

Contact Shape:
S: Straight
R: Right Angle
M: SMT

XXX

Length Of
Terminal

X

Packing
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

X

Journal Number
1: Type1
2: Type2

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min






Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C








Temperature Range: -40° C to +105° C



Mating With/配對母座:
F320/F321/F334/F335/F343




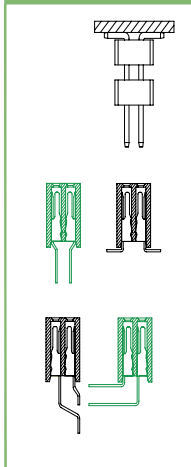


Dimension alternatives list					
ITEM	A	B	C	D	H
Standard	1.8	1.8/3.0/4.0/6.0			1.6 2.5
Alternate					2.0



Dimension alternatives list					
ITEM	A	B	D1	D2	H
Standard	2.50	1.8/3.0/4.0/6.0			1.6 2.5
Alternate					2.0

Dimension alternatives list					
ITEM	A	B	C	D	H
Standard	2.50	1.8/3.0/4.0/6.0		0.80	1.6 2.5
Alternate					2.0

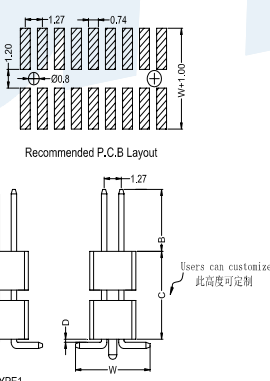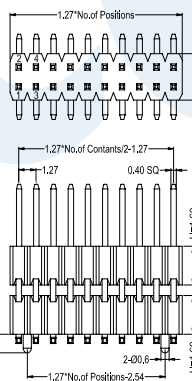

Dimension alternatives list					
ITEM	A	B	C	D	H
Standard	1.8/3.0/4.0/6.0		0.10/1.00	5.50	1.6 2.5
Alternate					2.0

P 316 - 22
P 320 - 22
P 325 - 22

XX
 No. Of Pins
 Per Row
 02~50P

XX
 Contact Plating
 Full Of Gold Semi-Gold
 A0=0.8u" B0=0.8U"
 ~ ~
 A9=30u" B9=30U"
 S1=Ordinary Tin Plated
 S2=Matte Tin Plated
 S3=Tin-plated High-temperature

X
 Insulator Material:
 B:PA6T
 C:PA9T
 D:LCP

X
 Contact Shape:
 S: Straight
 R: Right Angle
 M: SMT

XXX
 Length Of
 Terminal

X
 Packing
 A: PE Bag
 B: Tape & Reel
 C: Tube
 D: Tube+CAP
 E: Tray

X
 Journal Number
 1: Type1
 2: Type2

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分钟


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C



Temperture Range: -40° C to +105° C

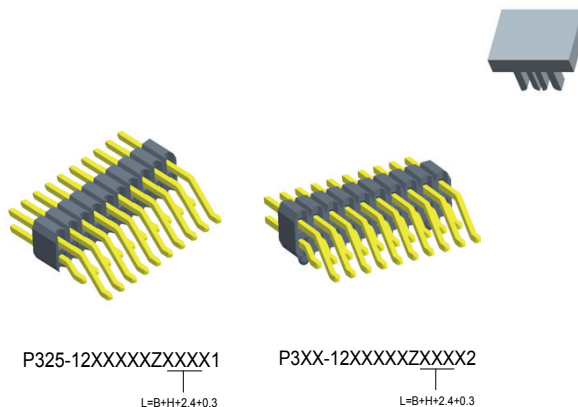

Mating With/配對母座:
F320/F321/F334/F335/F343

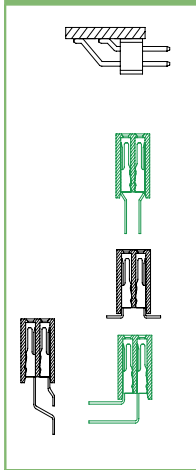

PIN HEADER

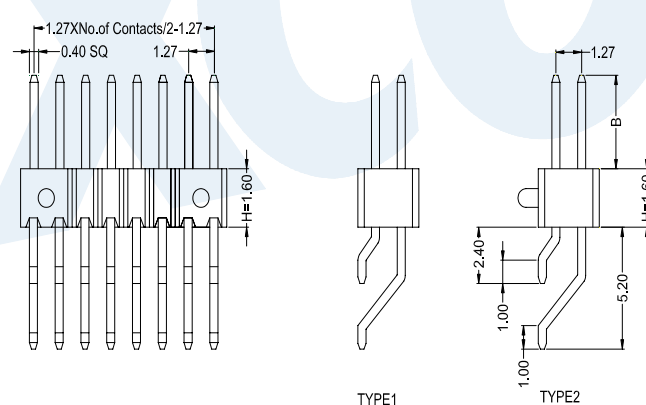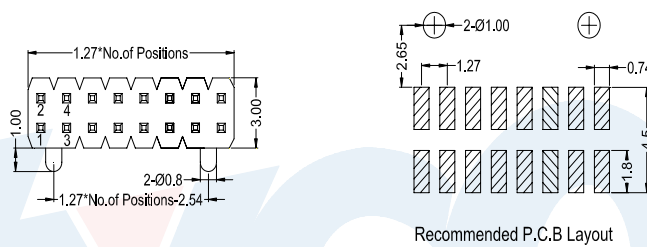

Dimension antitheses list			
ITEM	B	H	
Standard	1.8/3.0/4.0/6.0	1.6	2.5
Alternate		2.0	

P 3 1 6 - 1 2
P 3 2 0 - 1 2
P 3 2 5 - 1 2

XX
No. Of Pins
Per Row
02~50P

XX
Contact Plating
Full Of Gold A0=0.8u"
Semi-Gold B0=0.8U"
~
A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

X
Insulator Material:
B:PA6T
C:PA9T
D:LCP

X
Contact Shape:
Z:90° SMT

XXX
Length Of Terminal

X
Packing
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

X
Journal Number
1:Type1
2:Type2

[Http://www.yxcon.com](http://www.yxcon.com)

E-mail:yx@yxcon.com

YUXI DONGGUAN (東莞)
YUXI TAIWAN (台灣)

TEL:+86 769 85397456
TEL:+886 3313 2933

FAX:+86 769 85396015
FAX:+886 3313 2935

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C


Temperature Range: -40° C to +105° C

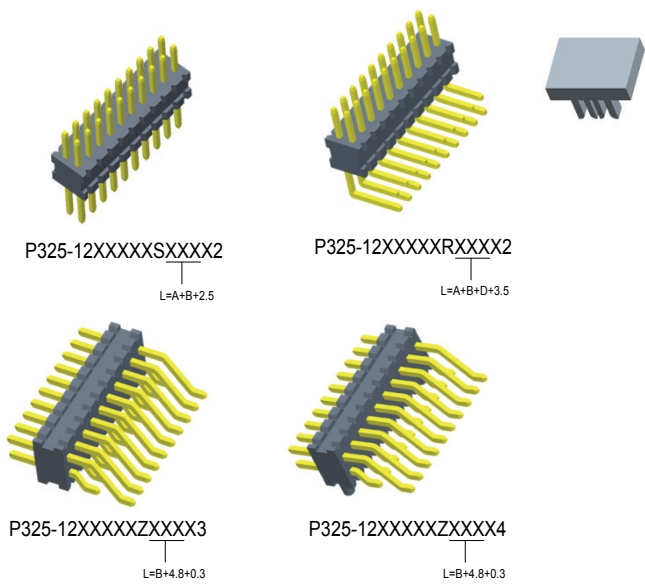



Mating With/配對母座:
F320/F321/F334/F335/F343

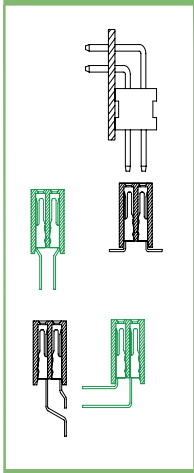


Dimension antitheses list		
ITEM	A	B
Standard	2.40	1.8/3.0/4.0/6.0
Alternate		





Recommended P.C.B Layout



TYPE 2

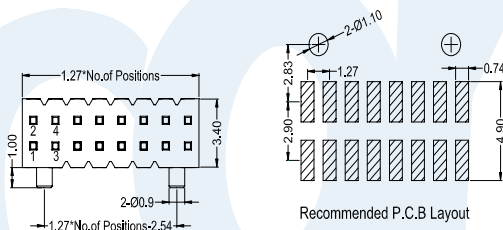


Recommended P.C.B Layout




TYPE 3

TYPE 4

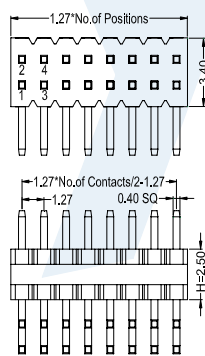

Recommended P.C.B Layout



TYPE 2

Dimension antitheses list			
ITEM	A	B	D
Standard	2.40	1.8/3.0/4.0/6.0	1.00
Alternate			

Dimension antitheses list	
ITEM	B
Standard	1.8/3.0/4.0/6.0
Alternate	

PIN HEADER

P 3 2 5 - 1 2

X X

X X

X

X

X X X

X

X

No.Of Pins Per Row
02~50P

Contact Plating
Full Of Gold A0=0.8u"
Semi-Gold B0=0.8U"
~
A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Material:
B:PA6T
C:PA9T
D:LCP

Contact Shape:
S: Straight
R: Right Angle
Z: 90° SMT

Length Of Terminal
Packing
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

Journal Number
2: Type2
3: Type3
4: Type4

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘

Withstanding Voltage: AC 500V/Minute


溫度範圍: -40° C to +105° C

Temperture Range: -40° C to +105° C




P325-22XXXXX SXXX2

$$L=A+B+C$$




P3XX-22XXXXX RXXX3

$$L=A+B+D+D+2H+0.2$$




P325-22XXXXX RXXX4

$$L=A+B+D+C+1.0$$



P325-22XXXXX MXXX3


$$L=B+D+C+(W-1.27)/2$$





P325-22XXXXX MXXX4

$$L=B+D+C+(W-1.27)/2$$



Mating With/配對母座:
F320/F321/F334/F335/F343

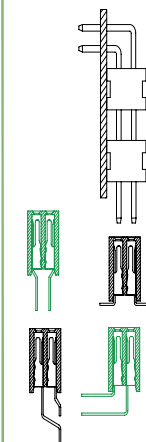



Dimension anitheses list			
ITEM	A	B	C
Standard	1.8	1.8/3.0/4.0/6.0	
Alternate			



Recommended P.C.B Layout



TYPE 2




TYPE 3




Recommended P.C.B Layout

Dimension anitheses list				
ITEM	A	B	D1	D2
Standard	2.50	1.8/3.0/4.0/6.0		
Alternate				

Dimension anitheses list				
ITEM	A	B	C	D
Standard	2.50	1.8/3.0/4.0/6.0		0.80
Alternate				



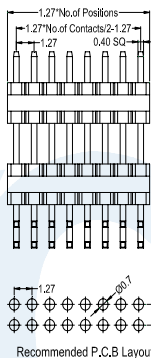


Recommended P.C.B Layout



TYPE 4

Users can customize
此高度可定制



TYPE 3

TYPE 4

Users can customize
此高度可定制

Dimension anitheses list					
ITEM	B	C	D	W	
Standard	1.8/3.0/4.0/6.0		0.10/1.00	5.50	
Alternate					

P 3 2 5 - 2 2

X X

X X

X

X

X X X

X

X

No.Of Pins Per Row
02~50P

Contact Plating
Full Of Gold Semi-Gold
A0=0.8u" B0=0.8U"

A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Material:
B:PA6T
C:PA9T
D:LCP

Contact Shape:
S:Straight
R:Right Angle
M:SMT

Length Of Terminal

Packing
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

Journal Number
2:Type2
3:Type3
4:Type4