

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rated Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

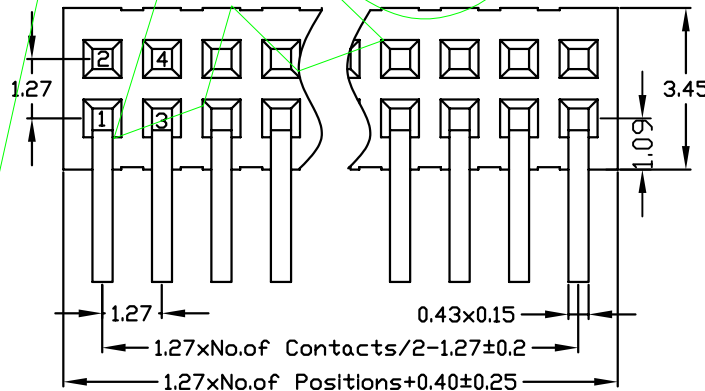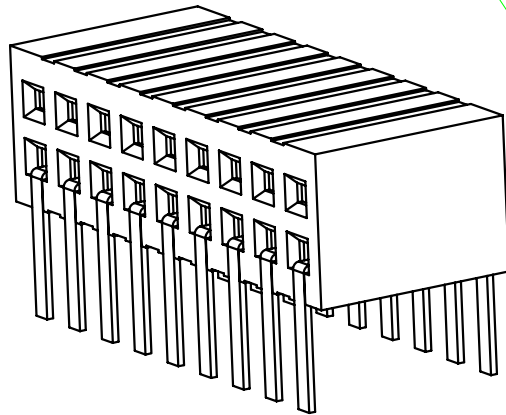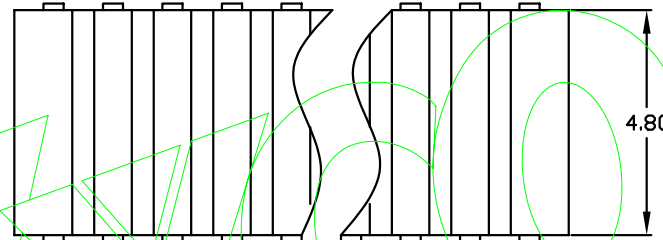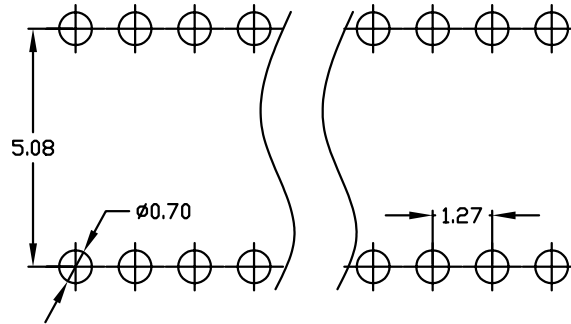

Ordering Information

F334-12 XX XX X RU X 1

NO. OF PINS
PER ROW
2-50P


Contact Plating
Full Of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

Semi-gold
B0=0.8U"
B1=1U"
B2=1.5U"
B3=2U"
B4=3U"
B5=5U"
B6=10U"
B7=15U"
B8=20U"
B9=30U"

INSULATOR MATERIAL:
B: PA6T
C: PA9T
D: LCP

PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

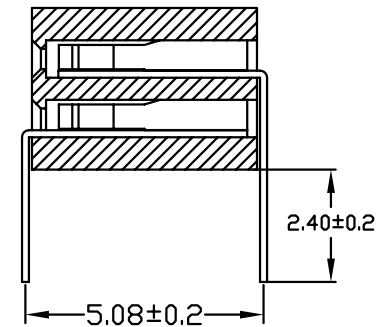

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE A4

SHEET 1/1

PROJ.

Fit

MM

Yxcon

东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co., Ltd.

卢小强

PART NO.

F334-12XXXXXRUX1

TITLE:

1.27mm 双排母 塑高3.45 90度 U型 侧插

Customer No.

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE

1

2

3

4

5

6

7

8

9

10