

# Specifications

# Ordering Information

F249-12 XX XX X MU X 1

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.






耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	PACKING
2~40P	Full Of Gold	B: PA6T	A: PE Bag
	Semi-gold	C: PA9T	B: Tape & Reel
		D: LCP	C: Tube
			D: Tube+CAP
			E: Tray

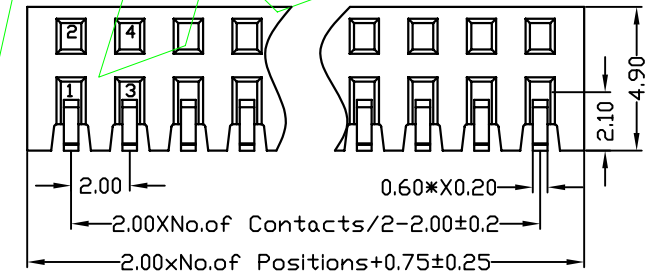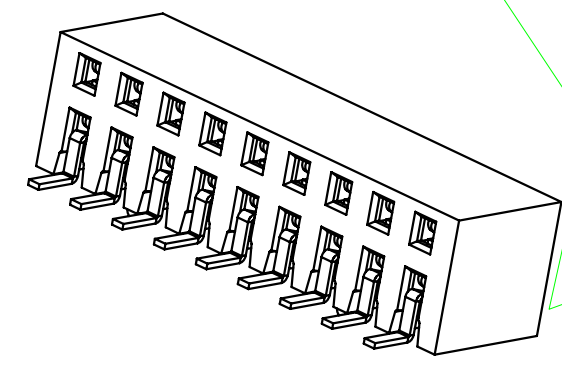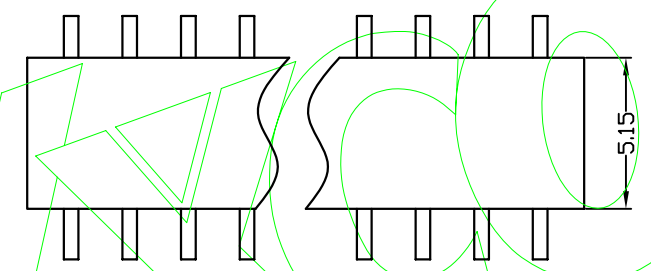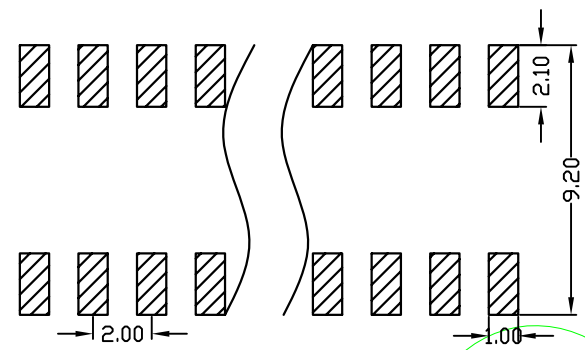

				OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司	
				X.X	±0.25	UNIT		MM		Dongguan Yuxi Electronic Co., Ltd.	
				X.XX	±0.20	SIZE	A4	DESIGN		PART NO.	F249-12XXXXXMUX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm 双排母 塑高4.9 SMT U型 侧插
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.	

1 2 3 4 5 6 7 8 9 10