

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C



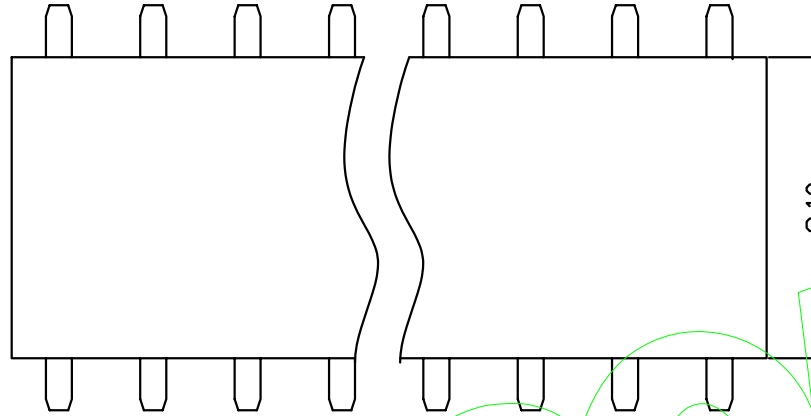


Ordering Information

F134-11 XX XX X MU X 1

NO. OF PINS PER ROW 2-40P	Contact Plating Full Of Gold	Semi-gold	INSULATOR MATERIAL:	PACKING
A0=0.8u"	B0=0.8U"	B:PA6T	A:PE Bag	
A1=1u"	B1=1U"	C:PA9T	B:Tape & Reel	
A2=1.5u"	B2=1.5U"	D:LCP	C:Tube	
A3=2u"	B3=2U"		D:Tube+CAP	
A4=3u"	B4=3U"		E:Tray	
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

YXCON

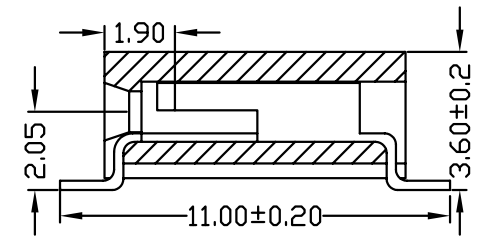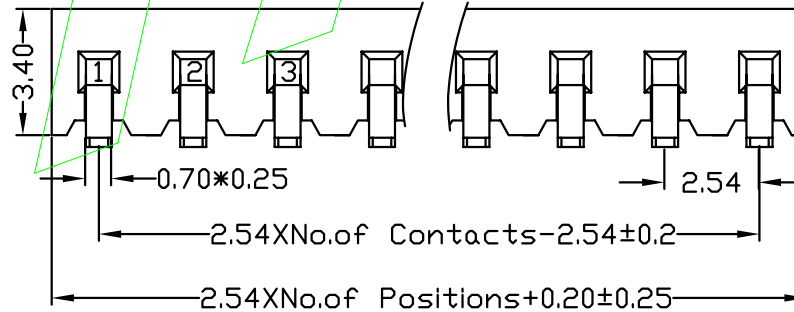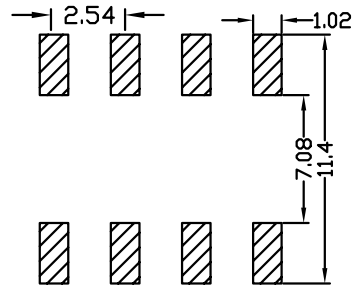

OPERATION

SCALE

Fit

X.X ±0.40

UNIT

MM

X.XX ±0.25

SIZE

A4

DESIGN

卢小强

PART NO.

F134-11XXXXMUX1

X.XXX ±0.15

SHEET

1/1

CHECK

TITLE:

2.54mm 单排母 塑高3.4 SMT U型 侧插

Angle ±3°

PROJ.

APPROVE

Customer No.

DIM TOL

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

Yxcon 东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co., Ltd.