

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black
 端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN
 Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL



2. 特性 (characteristics):

额定电流: 3 AMP
 Rating Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to +105°C
 Temperature Range: -40°C to +105°C

Ordering Information

F150-11 XX XX X SU X 1

NO. OF PINS PER ROW 1~40P	Contact Plating		INSULATOR MATERIAL:	PACKING
	Full Of Gold	Semi-gold	A: PBT	A: PE Bag
A0=0.8u"	B0=0.8U"	B1=1U"	B: PA6T	B: Tape & Reel
A1=1u"	B2=1.5U"	B3=2U"	C: PA9T	C: Tube
A2=1.5u"	B4=3U"	B5=5U"	D: LCP	D: Tube+CAP
A3=2u"	B6=10U"	B7=15U"		E: Tray
A4=3u"	B8=20U"	B9=30U"		
A5=5u"				
A6=10u"				
A7=15u"				
A8=20u"				
A9=30u"				
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

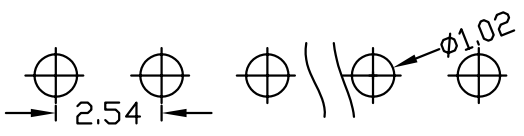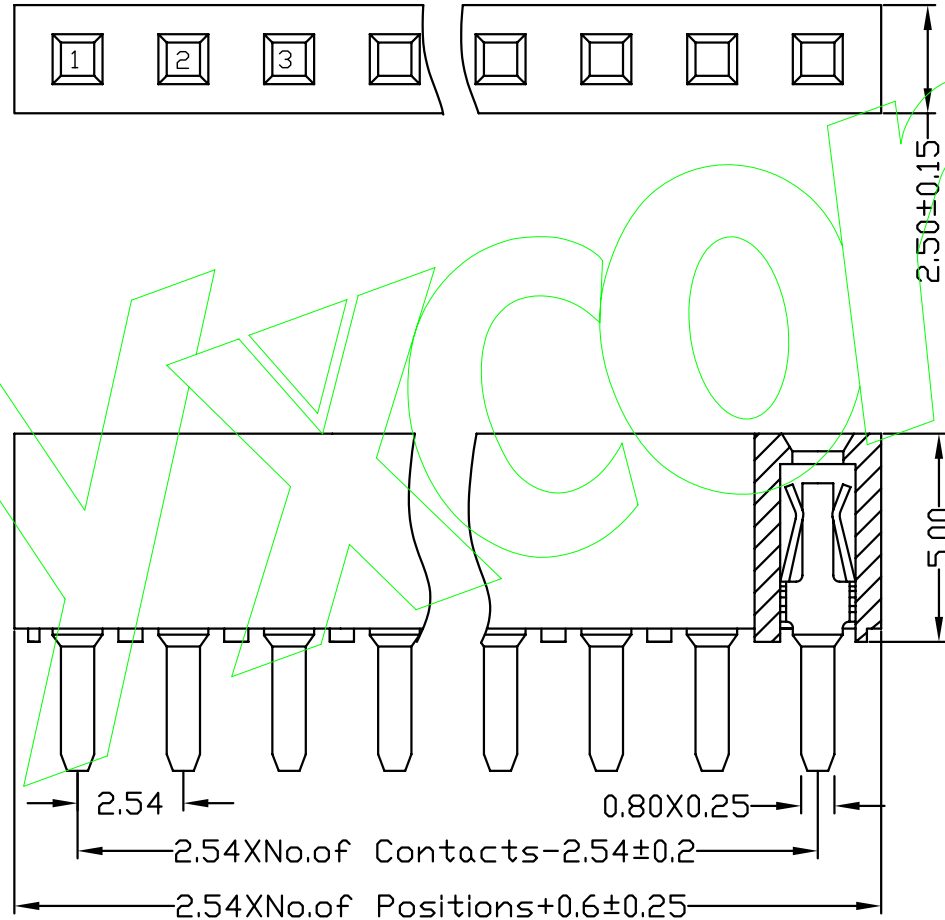

OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司												
X.X	±0.25	UNIT		MM		Dongguan Yuxi Electronic Co., Ltd.												
X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F150-11XXXXXSUX1											
X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm单排母 塑高5.0 180度 U型											
Angle	±3°	PROJ.	☉	APPROVE		Customer No.												
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE													
1		2		3		4		5		6		7		8		9		10