

Specifications

Ordering Information

F185-X1 XX XX X SY X 1

备注 (Remark)





1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black
 端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
 Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP
 Raring Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to+105°C
 Temperture Range: -40°C to+105°C

Plastic Layers	NO.OF PINS PER ROW 1-40P	Contact Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=6u" A6=10u" A7=15u" A8=20u" A9=30u"	Plating Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=6u" B6=10u" B7=15u" B8=20u" B9=30u"	INSULATOR MATERIAL: A:PBT B:PA6T C:PA9T D:LCP	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

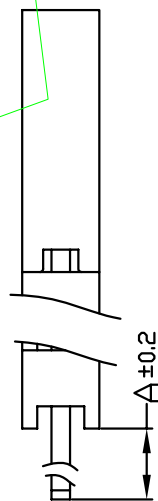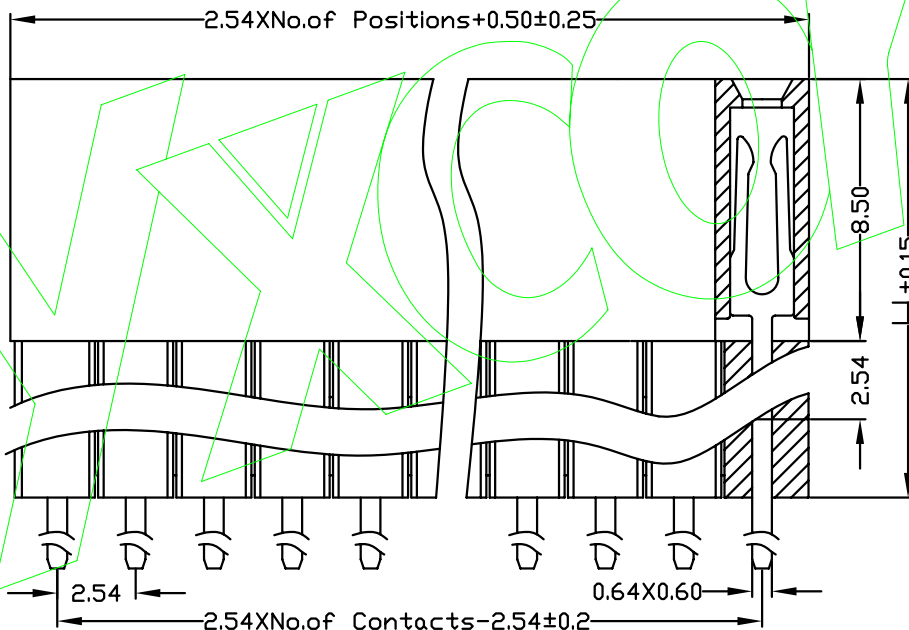

PART NO	DIM "H"		DIM "A"	
F185-11XXXXXSYX1	11.05	2.30	7.35	12.20
F185-21XXXXXSYX1	13.59	4.85	9.65	
F185-31XXXXXSYX1	16.31	2.30	7.10	
F185-41XXXXXSYX1	18.67	4.60		

OPERATION		SCALE	Fit
X.X	±0.25	UNIT	MM
X.XX	±0.20	SIZE	A4
X.XXX	±0.10	SHEET	1/1
Angle	±3°	CHECK	
DIM	TOL	PROJ.	APPROVE

Yxcon 东莞市宇熙精密连接器有限公司
 Dongguan Yuxi Electronic Co.,Ltd.

卢小强 PART NO. F185-X1XXXXXSYX1
 TITLE: 2.54mm 单排母 塑高8.5 180度 Y型
 Customer No.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
-----	------	--------------------------	--------	---------