

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: LCP+30%G. F UL94V-0, 颜色: 黑色.

Housing: LCP+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 7 AMP

Rating Current: 7 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

F789-11 XX XX D MU X 1

NO.OF PINS
PER ROW
1~30P

Contact Plating

Full Of Gold

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

INSULATOR

MATERIAL:

D:LCP

PACKING





A:PE Bag

B:Tape & Reel

C:Tube

D:Tube+CAP

E:Tray

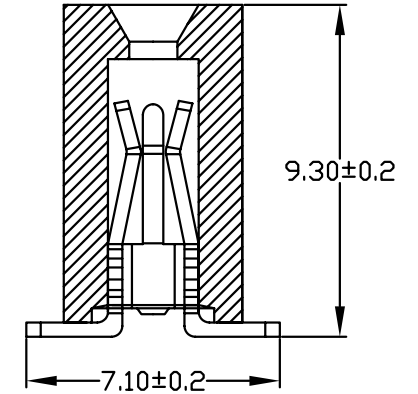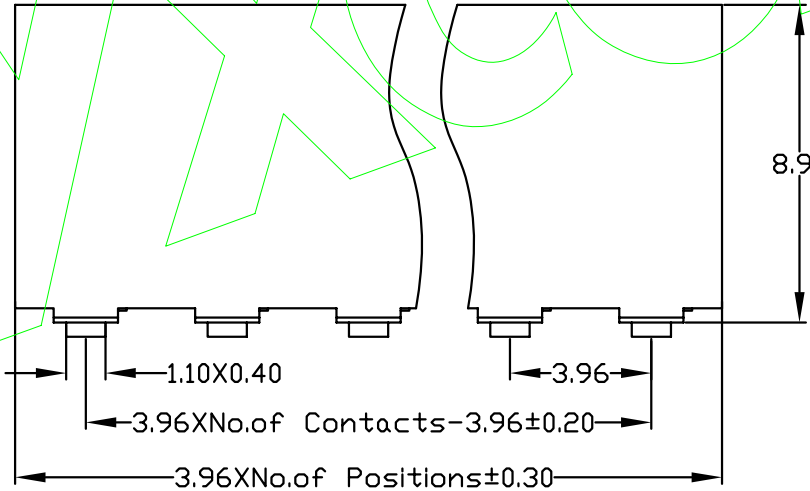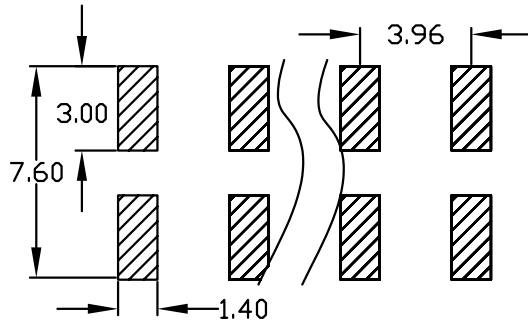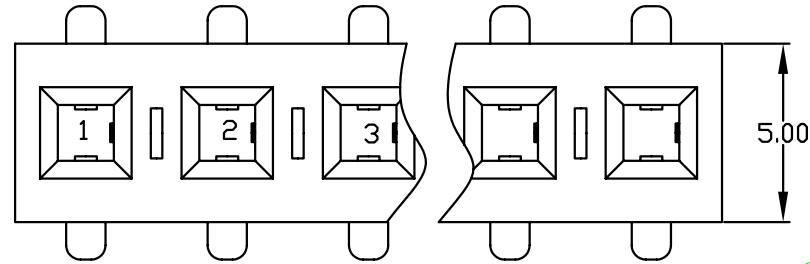

				OPERATION		SCALE		Fit	Yxcon 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强		
				X.XXX	±0.10	SHEET	1/1	CHECK	PART NO.		
				Angle	±3°	PROJ.	1/1	APPROVE	TITLE:		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	Customer No.		

东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co.,Ltd.

卢小强 PART NO. F789-11XXXXMUX1

TITLE: 3.96mm 单排母 塑高8.9 SMT

Customer No.