

# Specifications

# Ordering Information

F889-11 XX XX D MU X 1

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色.

Housing: LCP+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 7 AMP

Rating Current: 7 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.





Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

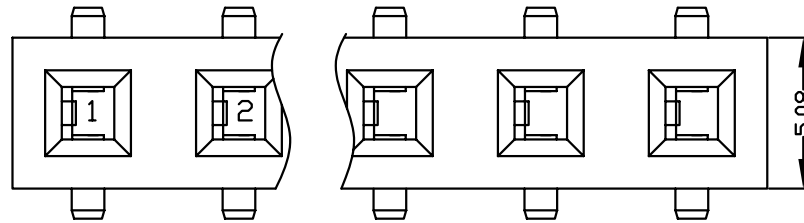

NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	PACKING
1-20P	Full Of Gold	D: LCP	A: PE Bag
	A0=0.8u"	B0=0.8U"	B: Tape & Reel
	A1=1u"	B1=1U"	C: Tube
	A2=1.5u"	B2=1.5U"	D: Tube+CAP
	A3=2u"	B3=2U"	E: Tray
	A4=3u"	B4=3U"	
	A5=5u"	B5=5U"	
	A6=10u"	B6=10U"	
	A7=15u"	B7=15U"	
	A8=20u"	B8=20U"	
	A9=30u"	B9=30U"	
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

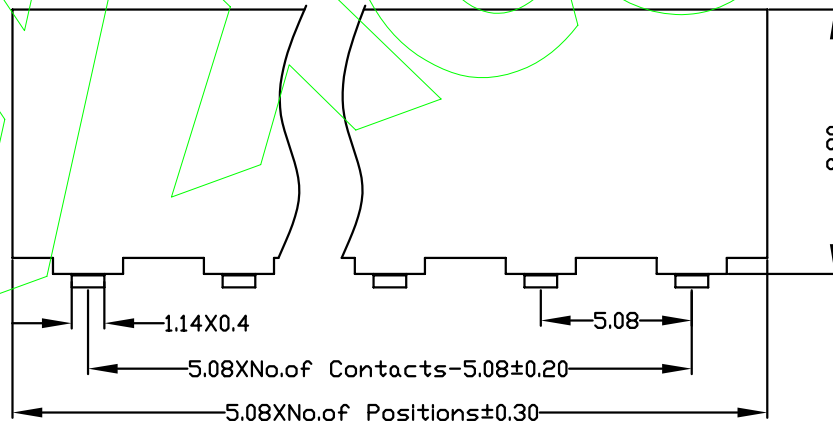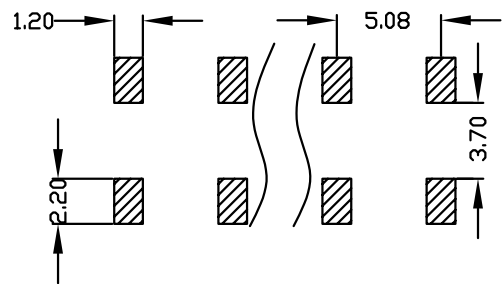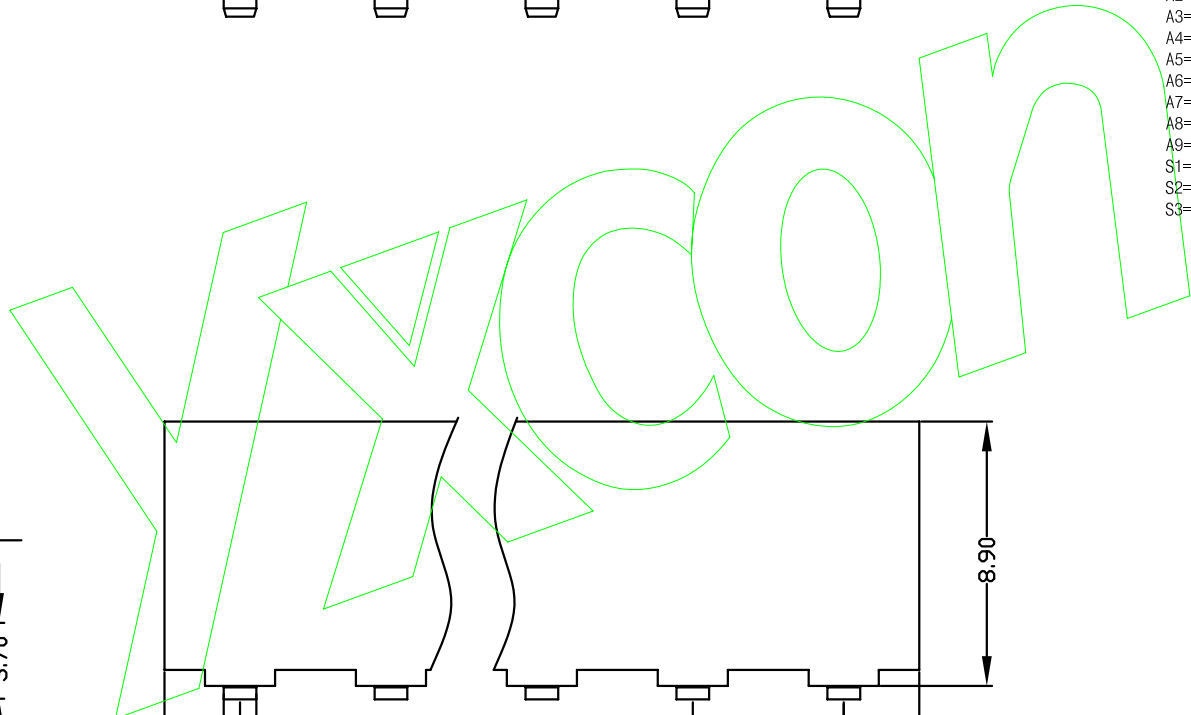

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	OPERATION	SCALE	Fit	Yxcon 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.					
							X.X ±0.25	UNIT	MM	SIZE	A4	DESIGN	卢小强	PART NO.	F889-11XXXXDMUX1
							X.XX ±0.20	SHEET	1/1	CHECK			TITLE:	5.08mm 单排母 塑高8.9 SMT U型	
							X.XXX ±0.10	PROJ.	APPROVE				Customer No.		
							Angle ±3°								