

Specifications






备注 (Remark)
 1. 材料 (MATERIAL)
 胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.
 Housing: PA6T+30%G. F UL94V-0, Color: Black
 四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 1 AMP
 Rating Current: 1 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to+105°C
 Temperature Range: -40°C to+105°C

Ordering Information

B349-1 XX XX X M X X 1

NO. OF PINS 4-100P	Contact Plating Full Of Gold	Semi-gold	INSULATOR MATERIAL: B:PA6T C:PA9T D:LCP	B:Black E:Grey413 W:White U:Blue	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
A0=0.8u"	B0=0.8U"	B1=1U"	G:Grey427		
A1=1u"	B2=1.5U"	B3=2U"			
A2=1.5u"	B4=3U"	B5=5U"			
A3=2u"	B6=10U"	B7=15U"			
A4=3u"	B8=20U"	B9=30U"			
A5=5u"					
A6=10u"					
A7=15u"					
A8=20u"					
A9=30u"					
	S1=Ordinary Tin Plated				
	S2=Matte Tin Plated				
	S3=Tin-plated High-temperature				

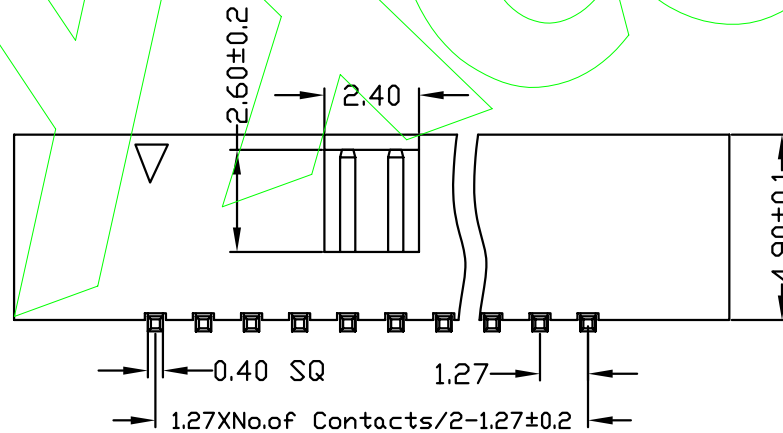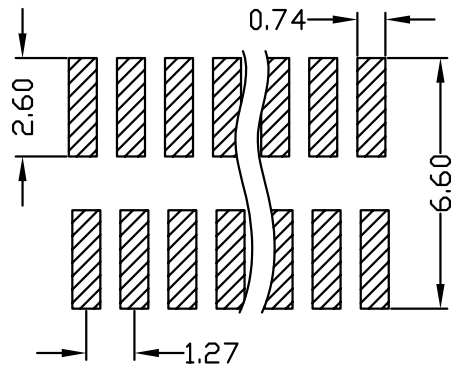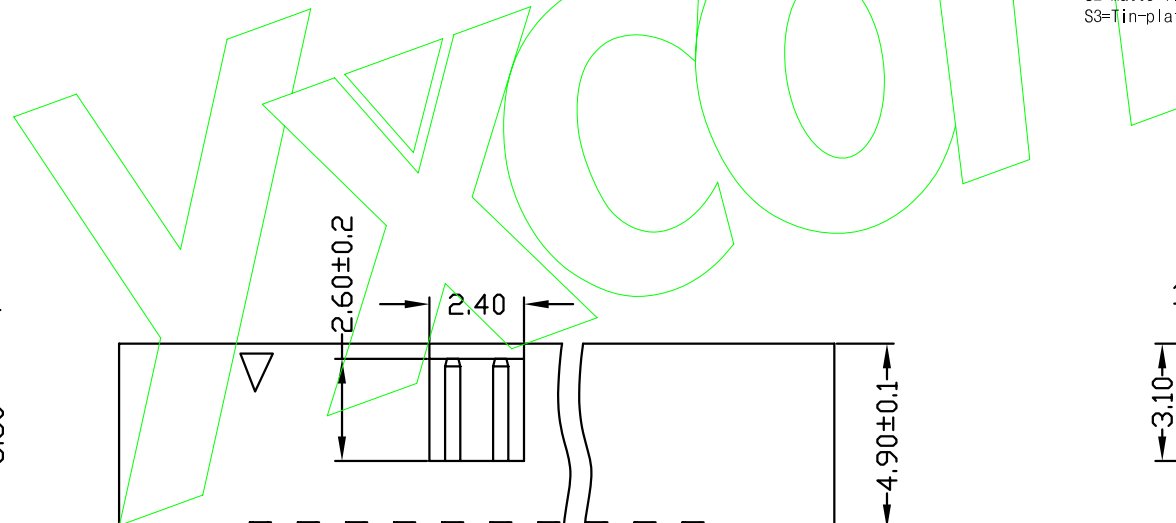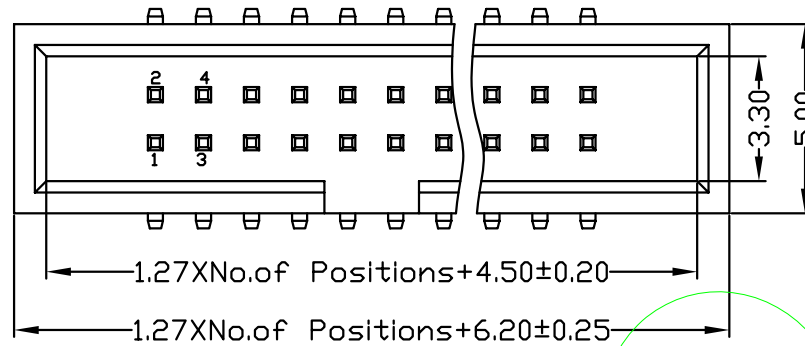

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	B349-1XXXXMXX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27mm 筒牛 塑高4.9 SMT
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.	