

Specifications

Ordering Information

B355-1 XX XX X S X X 1

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.




Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

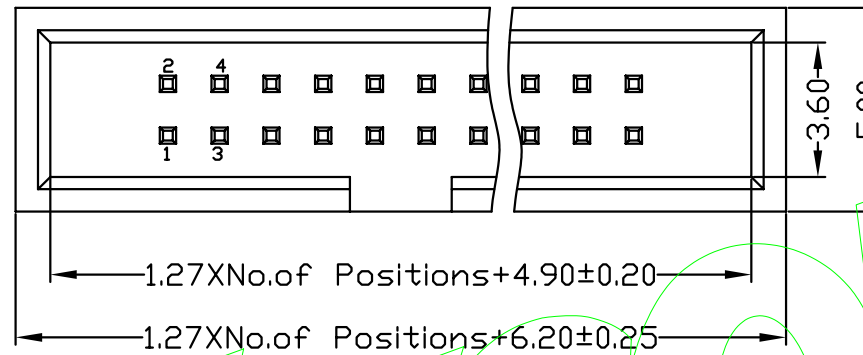

NO. OF PINS 4-100P	Contact Plating	INSULATOR MATERIAL:	B:Black G:Grey427 C:PA9T D:LCP U:Blue	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
A0=0.8u"	Full Of Gold	B0=0.8U"	B:PA6T	
A1=1u"		B1=1U"	E:Grey413	
A2=1.5u"		B2=1.5U"	W:White	
A3=2u"		B3=2U"	U:Blue	
A4=3u"		B4=3U"		
A5=5u"		B5=5U"		
A6=10u"		B6=10U"		
A7=15u"		B7=15U"		
A8=20u"		B8=20U"		
A9=30u"		B9=30U"		
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

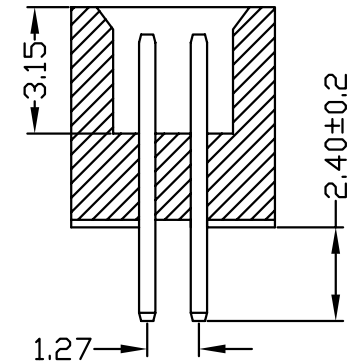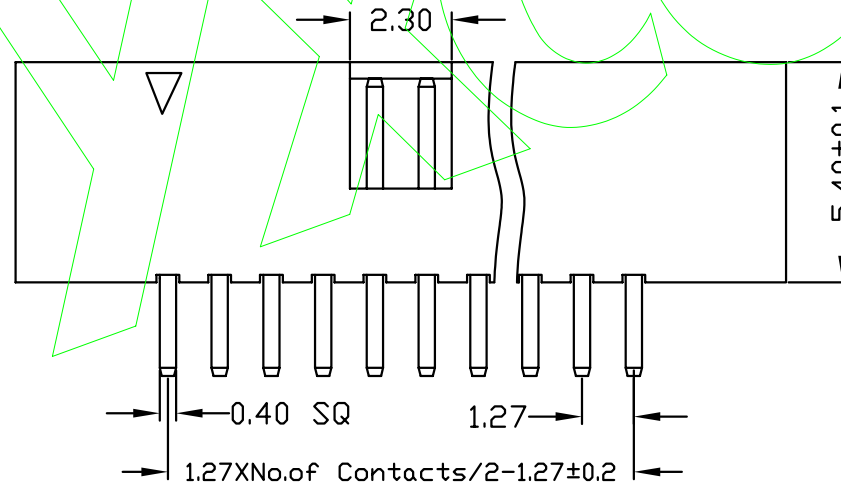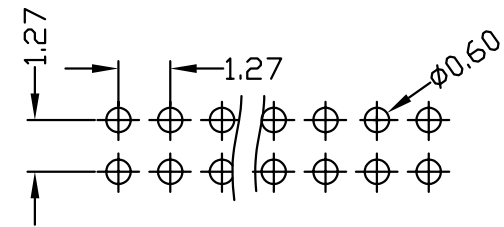

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

1/1

APPROVE

Yxcon

东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co.,Ltd.

卢小强

CHECK

APPROVE

PART NO.

TITLE:

Customer No.

B355-1XXXXXX1

1.27mm 筒牛 塑高5.4 180度

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
-----	------	--------------------------	--------	---------