

# Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.  
 Housing: PA6T+30%G.F UL94V-0, Color: Black  
 四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN  
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL  
 30u" MIN NICKEL UNDERPLATING OVER ALL






2. 特性 (characteristics):

额定电流: 1 AMP  
 Raring Current: 1 AMP.  
 接触阻抗: 20 mΩ MAX.  
 Contact Resistance: 20 mΩ MAX.  
 绝缘阻抗: 1000 MΩ MIN.  
 Insulating Resistance: 1000 MΩ MIN.  
 耐电压: AC 500V.  
 Withstanding Voltage: AC 500V.  
 温度范围: -40°C to +105°C  
 Temperature Range: -40°C to +105°C

# Ordering Information

B357-2 XX XX X M X X X

NO.OF PINS 4-100P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	INSULATOR MATERIAL: B:Black C:PA9T D:LCP	B:Black E:Grey413 W:White U:Blue	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray	1. TYPE 1 2. TYPE 2
----------------------	---	---	---	---	--	------------------------

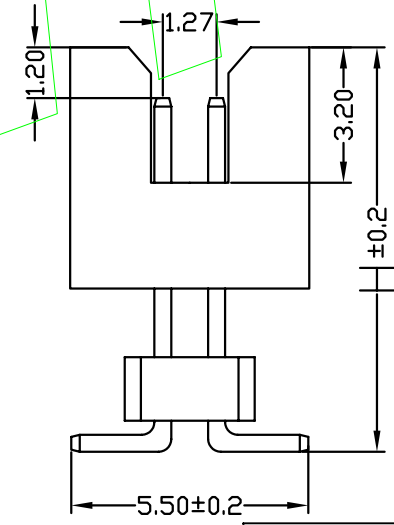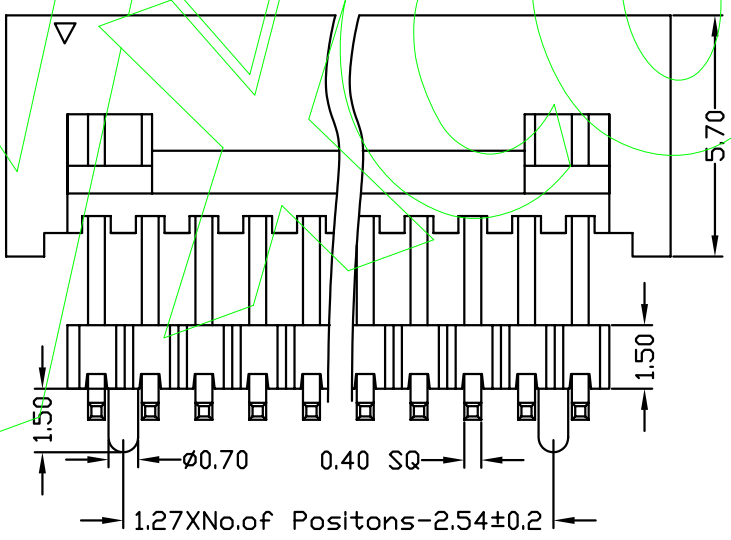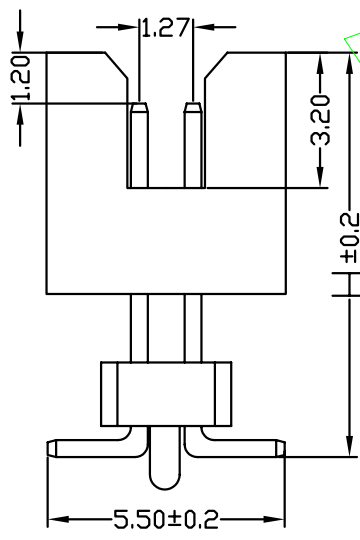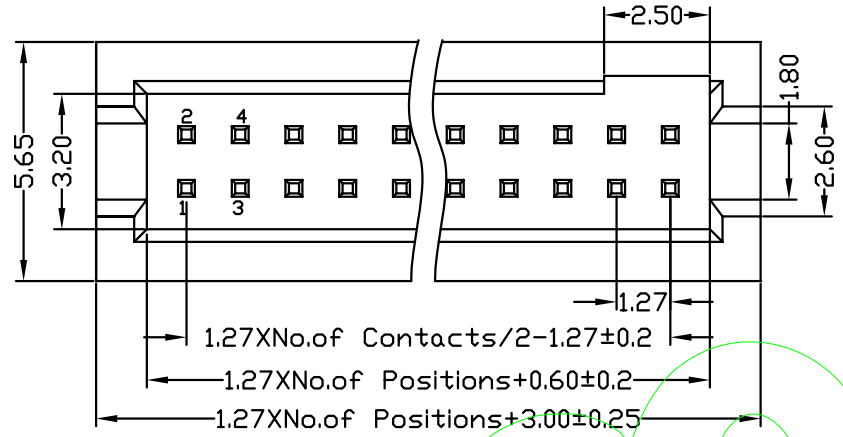

ITEM	H	
Standard	7.2	8.2
Alternate		

OPERATION		SCALE		Fit
X.X	±0.25	UNIT		MM
X.XX	±0.20	SIZE	A4	DESIGN
X.XXX	±0.10	SHEET	1/1	CHECK
Angle	±3°	PROJ.	☉	APPROVE
DIM	TOL			

**Yxcon** 东莞市宇熙精密连接器有限公司  
 Dongguan Yuxi Electronic Co., Ltd.

卢小强 PART NO. B357-2XXXXMXXX  
 TITLE: 1.27mm 筒牛 加塑胶 SMT  
 Customer No.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
-----	------	--------------------------	--------	---------