

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to+105°C

Temperature Range: -40°C to+105°C

Ordering Information

B357-1 XX XX X S X X 1

NO.OF PINS 4-100P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	INSULATOR MATERIAL: B:PA6T C:PA9T D:LCP	B:Black G:Grey427 E:Grey413 W:White U:Blue	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature				

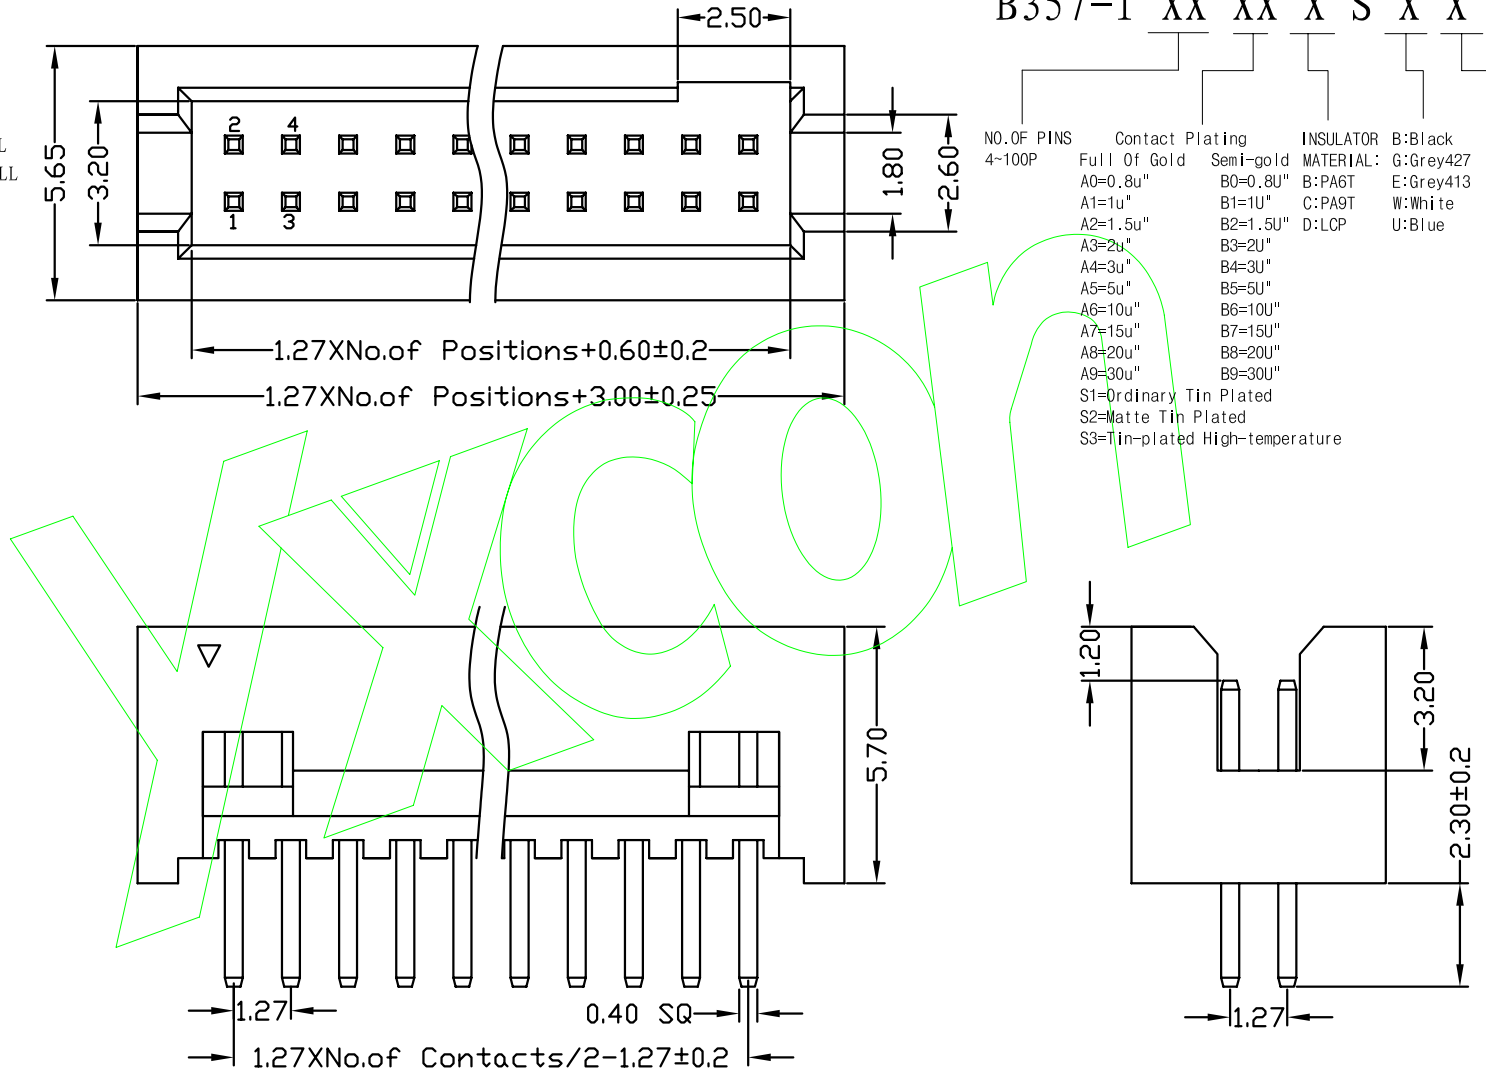

OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
X.X	±0.25	UNIT		MM			
X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	B357-1XXXXXX1
X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27mm 筒牛 塑高5.7 180度
Angle	±3°	PROJ.	☉	APPROVE		Customer No.	
DIM	TOL						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
1				
2				
3				
4				