

Specifications

Ordering Information

E302-1 XX XX X R X X 1

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Brass, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.


耐电压: AC 500V.

Withstanding Voltage: AC 500V.




温度范围: -40°C to+105°C

Temperature Range: -40°C to+105°C

NO.OF PINS 6-64P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	INSULATOR MATERIAL: B:PA6T C:PA9T D:LCP	B:Black G:Grey427 E:Grey413 W:White U:Blue	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
---------------------	---	---	--	--	--

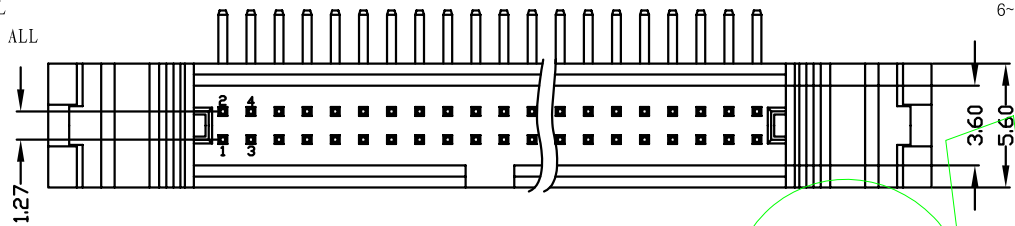

90°

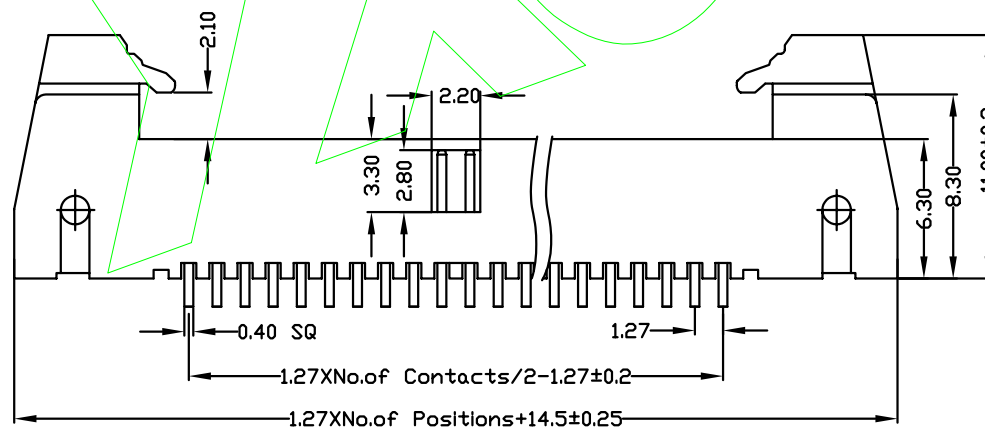

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE A4

SHEET 1/1

PROJ.

Fit

MM



东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co.,Ltd.

卢小强

PART NO.

E302-1XXXXXXX1

TITLE:

1.27X1.27牛角 90度 短耳

Customer No.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
-----	------	--------------------------	--------	---------