

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

Ordering Information

B257-1 XX XX X S X X 1

NO.OF PINS
4~100P

Contact Plating

Full Of Gold

Semi-gold

INSULATOR

B:Black

PACKING

A:PE Bag

B:Tape & Reel

C:Tube

D:Tube+CAP

E:Tray

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

B0=0.8U"

B1=1U"

B2=1.5U"

B3=2U"

B4=3U"





B5=5U"

B6=10U"

B7=15U"

B8=20U"

B9=30U"

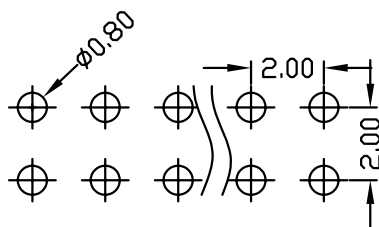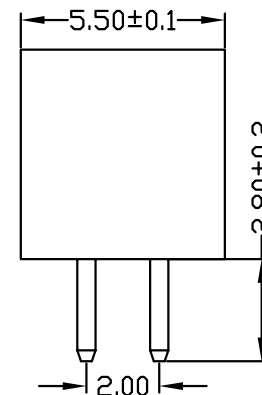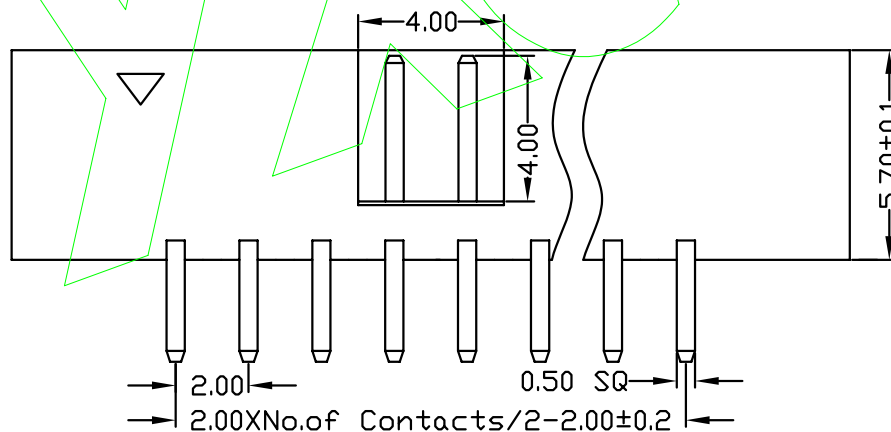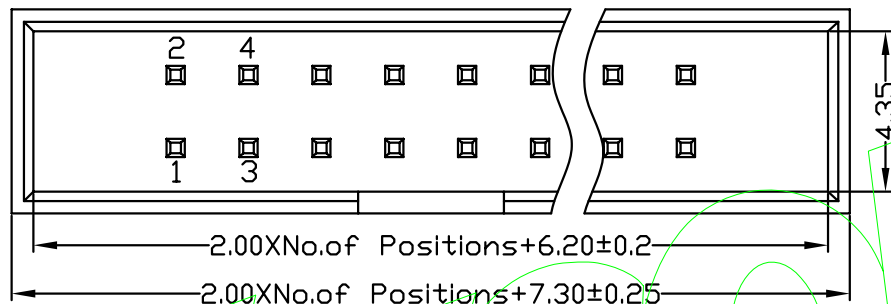

				OPERATION		SCALE		Fit	Yxcon 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.			
				X.X	± 0.25	UNIT		MM				
				X.XX	± 0.20	SIZE	A4	DESIGN	卢小强	PART NO.	B257-1XXXXXXX1	
				X.XXX	± 0.10	SHEET	1/1	CHECK		TITLE:	2.0mm 筒牛 塑高5.7 180度	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.		