

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.






温度范围: -40°C to+105°C

Temperature Range: -40°C to+105°C

Ordering Information

B257-2 XX XX X M X X X

NO. OF PINS	Contact Plating		INSULATOR	B:Black	PACKING	1. TYPE 1
4-100P	Full Of Gold	Semi-gold	MATERIAL:	G:Grey427	A:PE Bag	2. TYPE 2
A0=0.8u"	B0=0.8U"	B:PA6T	E:Grey413	B:Tape & Reel		
A1=1u"	B1=1U"	C:PA9T	W:White	C:Tube		
A2=1.5u"	B2=1.5U"	D:LCP	U:Blue	D:Tube+CAP		
A3=2u"	B3=2U"			E:Tray		
A4=3u"	B4=3U"					
A5=5u"	B5=5U"					
A6=10u"	B6=10U"					
A7=15u"	B7=15U"					
A8=20u"	B8=20U"					
A9=30u"	B9=30U"					
	S1=Ordinary Tin Plated					
	S2=Matte Tin Plated					
	S3=Tin-plated High-temperature					

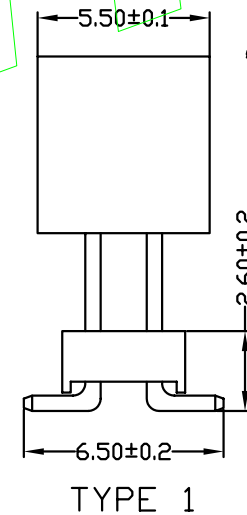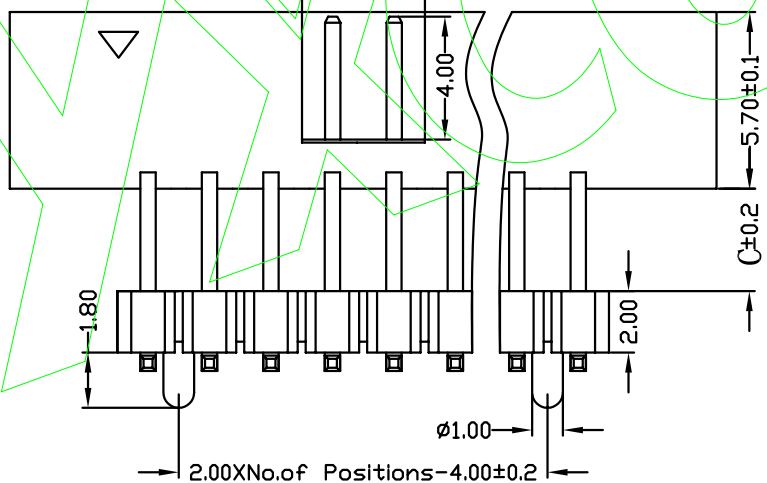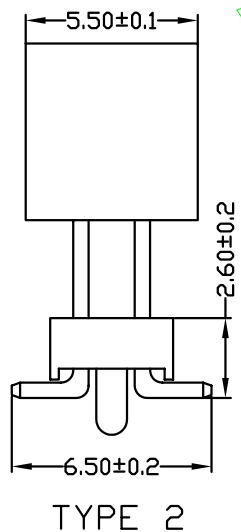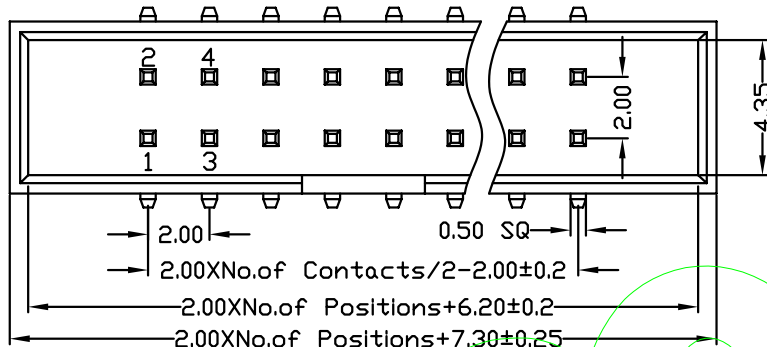

ITEM	C	
Standard	0	1.00
Alternate		

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	B257-2XXXXMXXX
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0mm 筒牛 塑高5.7 加塑胶 SMT
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE		Customer No.	