

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA6T/LCP+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL




2. 特性 (characteristics):

额定电流: 2 AMP
 Raring Current: 2 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to+105°C
 Temperture Range: -40°C to+105°C

Ordering Information

B264-1 XX XX X S X X 1

NO. OF PINS 4-100P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	INSULATOR MATERIAL: B:PA6T C:PA9T D:LCP	B:Black E:Grey413 W:White U:Blue	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
-----------------------	---	---	--	---	--

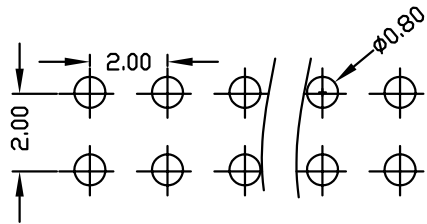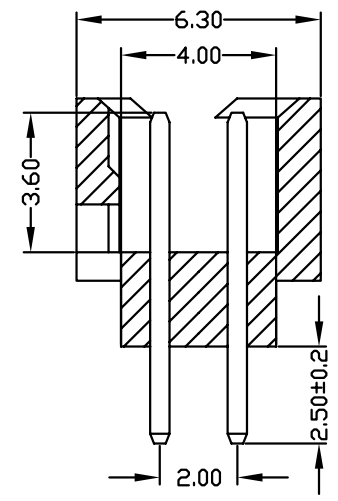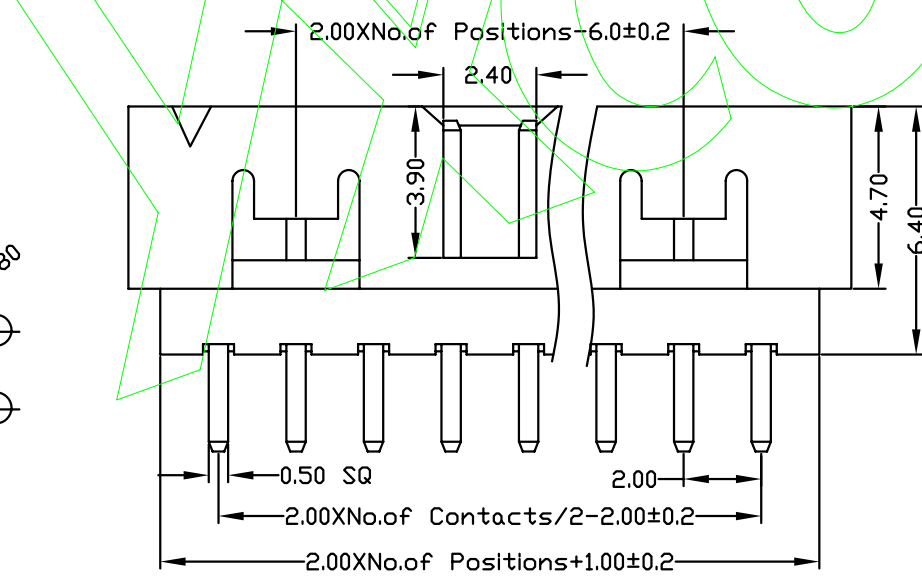

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强			PART NO.	B264-1XXXXXX1
				X.XXX	±0.10	SHEET	1/1	CHECK				TITLE:	2.0mm 筒牛 塑高6.4 180度
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE	Customer No.		