
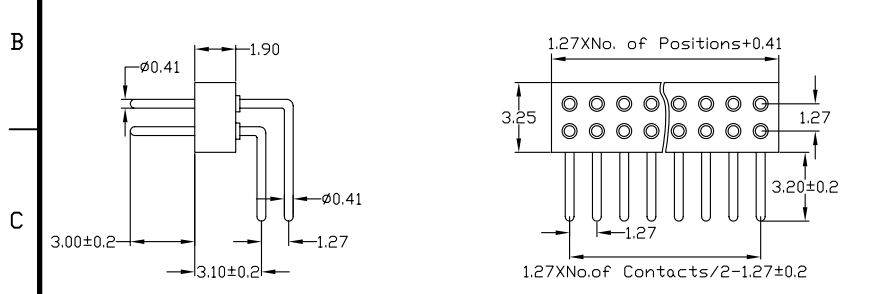



Right socket connector:solder tail
single row
Availability from:2 to 50 contacts
Standard number of contacts 25 and
50

Ordering Information


RP3XX-X XX X X X R XXX 1

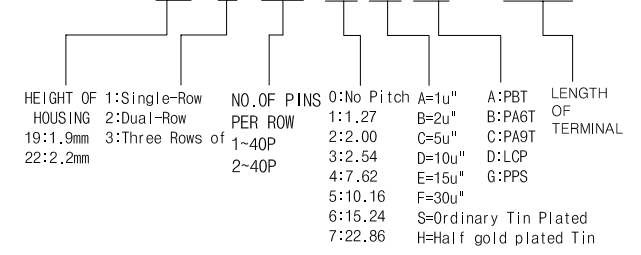

Right socket connector:solder tail
double row
Availability from:4 to 100 contacts
Standard number of contacts 50 and
100

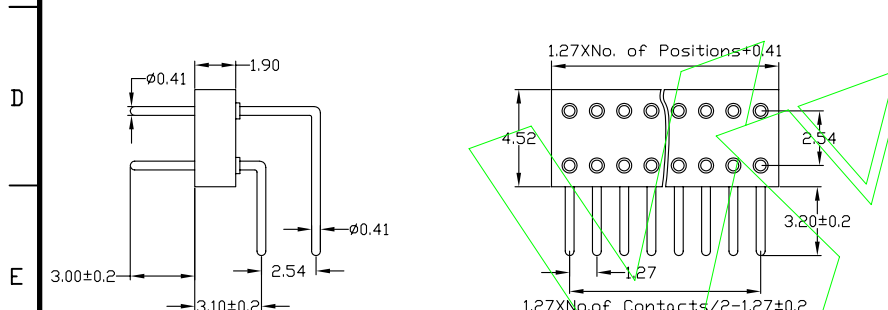


Right socket connector:solder tail
double row with 2.54mm row to row
distance
Availability from:4 to 100 contacts
Standard number of contacts 100

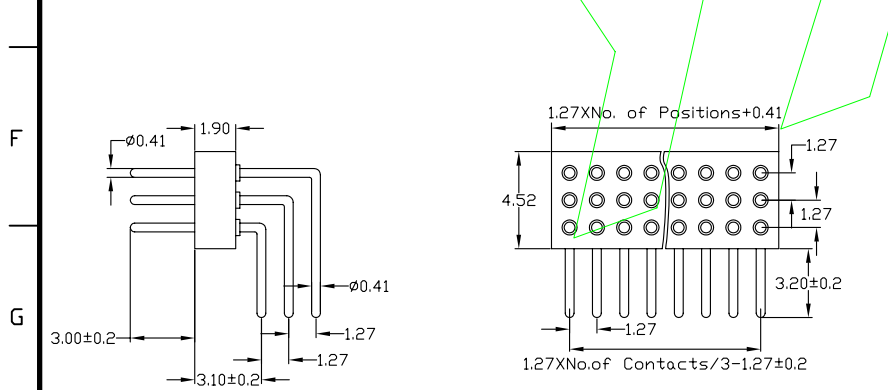

Right socket connector:solder tail
triple row
Availability from:6 to 150 contacts
Standard number of contacts 150

Specifications

Insulator : Black glass filled polyester PPS-GF30-FR
Fiammability : UL94V-0
Sleeve : Brass CuZn 36Pb3(36000)
Mating pin Ø : 0.41 mm
Mechancial life : min 500 cycles
Rated current : 1Amp
Contact resistance: Max 10mΩ
Dielectric resistance : Min 1000V_{RMS}

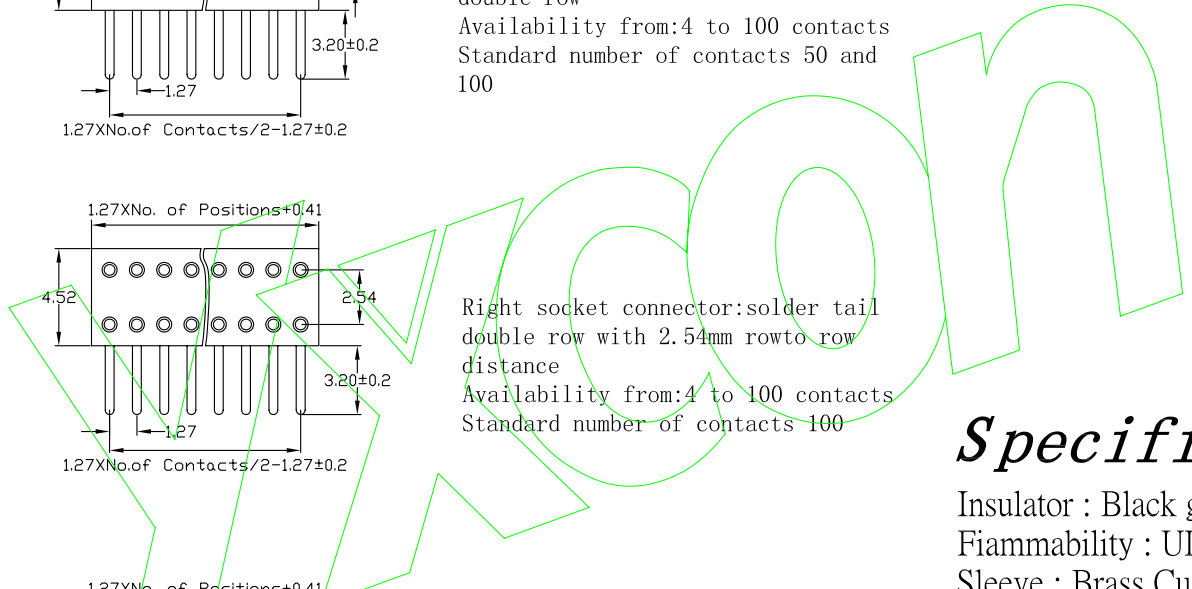

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	RP3XX-XXXXXXX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27圆孔 排针 90度
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.	