
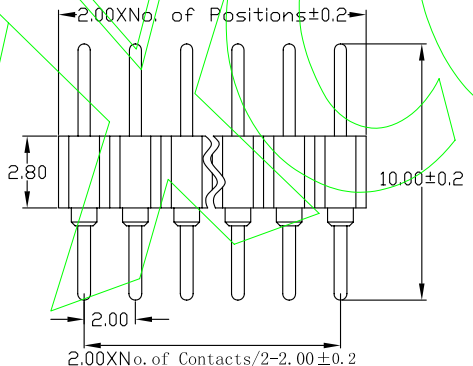


Ordering Information

RP228-X XX X X X S 100 1

HEIGHT OF HOUSING	1:Single-Row 2:2.8mm	NO. OF PINS PER ROW	2:2.00 3:Three Rows of 1~40P	0:No Pitch	A=1u" B=2u" C=5u" D=10u" E=15u" F=30u"	A:PBT B:PA6T C:PA9T D:LCP G:PPS	LENGTH OF TERMINAL	S=Ordinary Tin Plated H=Half gold plated Tin
-------------------	-------------------------	---------------------	---------------------------------	------------	---	---	--------------------	---

Stright socket connector:solder tail
single row
Availability from:2 to 40 contacts
Standard number of contacts 40



Stright socket connector:solder tail
double row
Availability from:4 to 80 contacts
Standard number of contacts 80

Specifications

Insulator : Black glass filled polyester PPS-GF30-FR
 Fiammability : UL94V-0
 Sleeve : Brass CuZn 36Pb3(36000)
 Mating pin Ø : 0.45 mm
 Mechancial life : min 500 cycles
 Rated current : 1Amp
 Contact resistance: Max 10mΩ
 Dielectric resistance : Min 1000V_{RMS}

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	RP228-XXXXXXS1001
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0圆孔排针 塑高2.8 180度 L=10.0
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	PROJ.	☉	APPROVE		Customer No.	

