

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PPS+30%G. F UL94V-0, 顏色: 黑色

Housing: PPS+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass CuZn 36Pb3 (C3600)

相配針: ϕ 0.41mm

Connecting Pin: ϕ 0.41mm

2. 特性 (characteristics):

額定電流: 1.0AMP


Rating Current: 1.0AMP

接觸阻抗: 10m Ω Max


Contact Resistance: 10m Ω Max

絕緣強度: Min 1000V RMS


Dielectric strength : Min 1000V RMS




RP3XX-1XX0XXS0811



RP3XX-3XX3XXS0811





RP3XX-2XX1XXS0811






RP3XX-3XX1XXS0811




Mating With/配對母座:
RF3

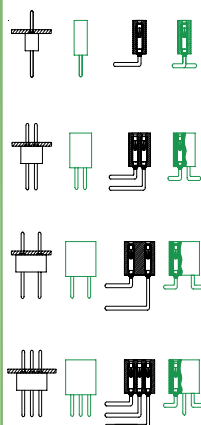




Recommended P.C.B Layout

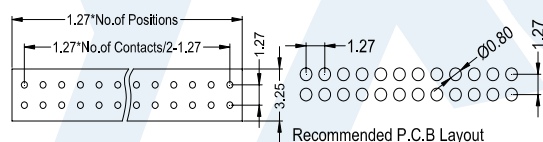



Recommended P.C.B Layout



Recommended P.C.B Layout



Recommended P.C.B Layout



RP3XX-X

Height of
Housing:
19: 1.9mm
22: 2.2mm

No. of Row:
1: Single Row
2: Dual Row
3: Three Row

XX

No. of Pins
Per Row:
02~50P

X

No. of
Array Pitch
0: No Pitch
1: 1.27
3: 2.54

X

Contact Plating
A=1u"
B=2u"
~
E=15u"
F=30u"
S=Ordinary Tin Plated
H=Half Gold Plated Tin

X

Insulator Material:
A: PBT
G: PPS

S

081

Length Of Terminal

1

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯:PPS+30%G. F UL94V-0, 顏色:黑色

Housing:PPS+30%G. F UL94V-0, Color:Black

端子:黃銅

Contact:Brass CuZn 36Pb3 (C3600)

相配針: ϕ 0.41mm

Connecting Pin: ϕ 0.41mm

2. 特性 (characteristics):

額定電流:1.0AMP


Rating Current:1.0AMP

接觸阻抗:10m Ω Max


Contact Resistance:10m Ω Max

絕緣強度: Min 1000V RMS


Dielectric strength : Min 1000V RMS




RP3XX-1XX0XGR1031



RP3XX-3XX3XGR1031








RP3XX-2XX1XGR1031



RP3XX-3XX1XGR1031

Mating With/配對母座:
RF3

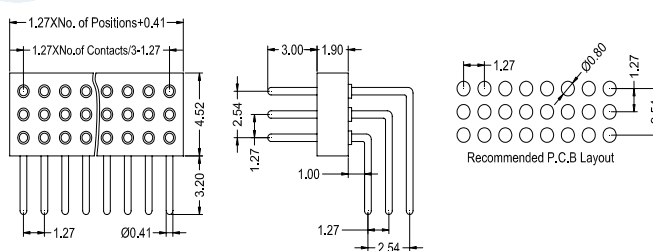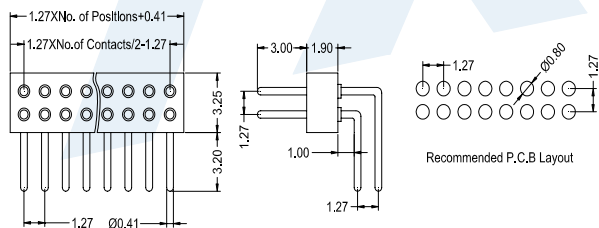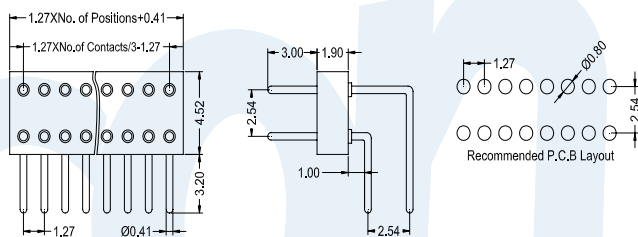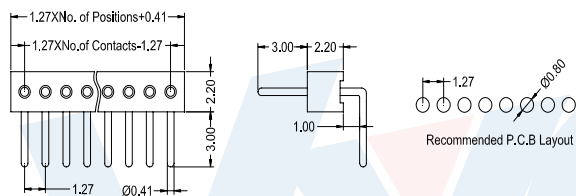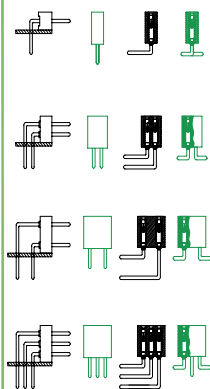

R

ROUND

RP3XX-X

Height of Housing:
19:1.9mm
22:2.2mm

No. of Row:
1:Single Row
2: Dual Row
3: Three Row

XX

No. of Pins Per Row:
2~50P

X

No. of Array Pitch
0:No Pitch
1:1.27
3:2.54

X

Contact Plating
A=1u"
B=2u"
~
E=15u"
F=30u"
S=Ordinary Tin Plated
H=Half Gold Plated Tin

G

Insulator Material:
G:PPS

R

103

Length Of Terminal

1

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PPS+30%G. F UL94V-0, 顏色: 黑色

Housing: PPS+30%G. F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass CuZn 36Pb3 (C3600)

相配針: ϕ 0.41mm

Connecting Pin: ϕ 0.41mm

2. 特性 (characteristics):

額定電流: 1.0AMP


Rating Current: 1.0AMP

接觸阻抗: 10m Ω Max


Contact Resistance: 10m Ω Max

絕緣強度: Min 1000V RMS


Dielectric strength: Min 1000V RMS



RP3XX-1XX0XGM0821



RP3XX-3XX3XGM0821








RP3XX-2XX1XGM0821



RP3XX-3XX1XGM0821

Mating With/配對母座:
RF3

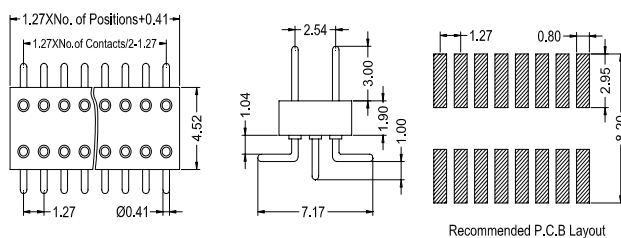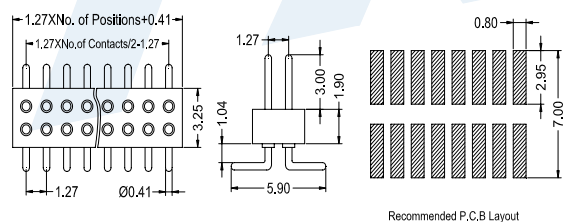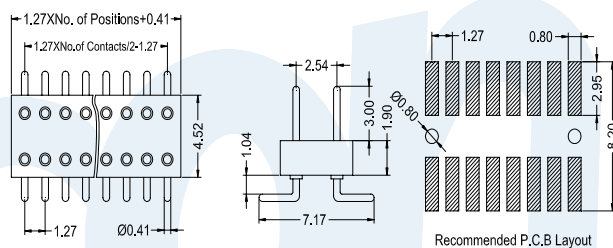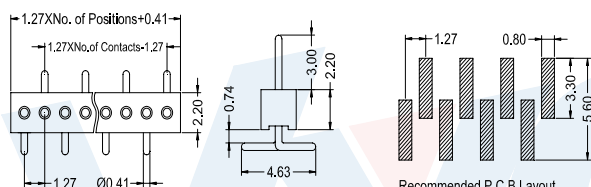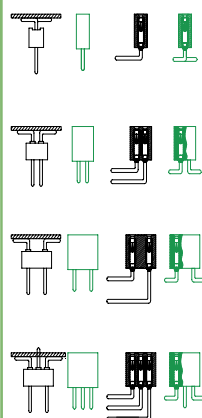

RP3XX-X

Height of Housing:
19: 1.9mm
22: 2.2mm

No. of Row:
1: Single Row
2: Dual Row
3: Three Row

XX

No. of Pins Per Row:
02~50P

X

No. of Array Pitch
0: No Pitch
1: 1.27
3: 2.54

X

Contact Plating
A=1u"
B=2u"
~
E=15u"
F=30u"
S=Ordinary Tin Plated
H=Half Gold Plated Tin

G

Insulator Material:
G: PPS

M

082

Length Of Terminal

1

[Http://www.yxcon.com](http://www.yxcon.com)

E-mail: yx@yxcon.com

YUXI DONGGUAN (東莞)
YUXI TAIWAN (台灣)

TEL: +86 769 85397456
TEL: +886 3313 2933

FAX: +86 769 85396015
FAX: +886 3313 2935