
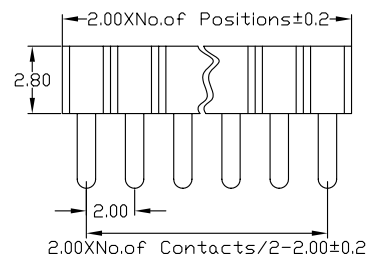





Stright socket connector low
profile heght2.8mm:solder tail,
double row, low profile
Availability from:2 to 40 contacts
Standard number of contacts 40

Ordering Information

RF228-X XX X X X S XXX 1

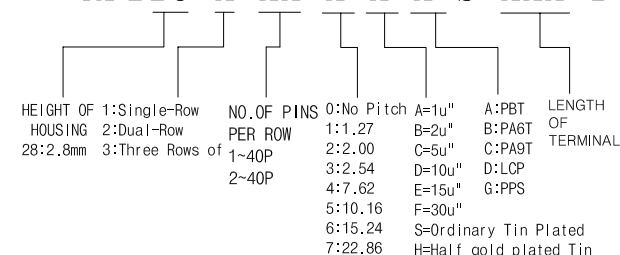



Straight socket connector low
 profile height 2.8mm: solder tail,
 double row, low profile
 Availability from: 2 to 80 contacts
 Standard number of contacts: 80

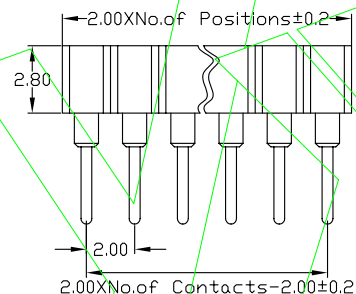

Straight socket connector height
 4.2mm:solder tail,
 Availability from:2 to 40 contacts
 Standard number of contacts 40

Specifications

Insulator : Black glass filled polyester PPS-GF30-FR
 Flammability : UL94V-0
 Sleeve : Brass CuZn 36Pb3(36000)
 Contact cusp (6 finger) : Beryllium copper (C17200)
 Mating pin Ø : 0.40 to 0.66 mm or 0.50SQ
 Forces : (polished steel gauge Ø0.46mm)
 -Insertion : 0.7 N typ.
 -Withdrawal : 0.4N typ.
 Mechanical life : min 500 cycles
 Rated current : 3Amp
 Contact resistance: Max 10mΩ
 Dielectric resistance : Min 1000V_{RMS}

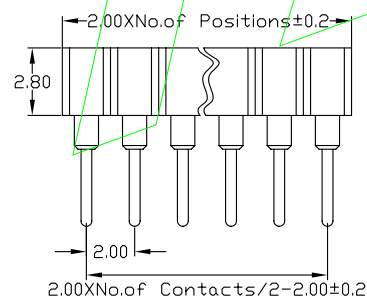

Straight socket connector height
 4.2mm:solder tail,
 Availability from:4 to 80 contacts
 Standard number of contacts 80

					OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.		
					X.X	±0.25	UNIT		MM			
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	RF228-XXXXXXSXX1
					X.XXX	±0.10						
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.0圆孔排母 塑高2.8 180度
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.