

Specifications

WAFER

備注 (Remark)

1. 材料 (Material)


膠芯:LCP/PA6T UL94V-0

Housing:LCP/PA6T UL94V-0

端子:磷青銅/黃銅

Contact:Phosphor bronze/Brass

1002WRS-XX-XXSN

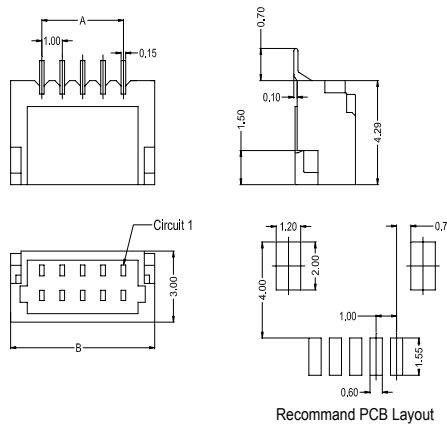

1002WRS-XX-XXSN

Poles	Dimensions(mm)	
	A	B
02	1.00	4.05
03	2.00	5.05
04	3.00	6.05
05	4.00	7.05
06	5.00	8.05
07	6.00	9.05
08	7.00	10.05
09	8.00	11.05
10	9.00	12.05
11	10.00	13.05
12	11.00	14.05
13	12.00	15.05
14	13.00	16.05
15	14.00	17.05
16	15.00	18.05
17	16.00	19.05
18	17.00	20.05
19	18.00	21.05
20	19.00	22.05
24	23.00	26.05

PART NO	Material	Material (Pin And Solder Tabs)	Plating (Pin And Solder Tabs)	Mates With SWB Housing
1002WRS-XXHF-6TSN	Nylon 6T UL 94V-0 Halogen Free	Phosphor Bronze Or Brass	Tin-Plated	1002H
1002WRS-XXHF-LPSN	LCP UL 94V-0 Halogen Free	Phosphor Bronze Or Brass	Tin-Plated	1002H
1002WRS-XX-LPSN	LCP UL 94V-0	Phosphor Bronze Or Brass	Tin-Plated	1002H
1002WRS-XX-6TSN	Nylon 6T UL 94V-0	Phosphor Bronze Or Brass	Tin-Plated	1002H

Recommad PCB Layout

Housing


備注 (Remark)

1. 材料 (Material)

膠芯:PA66/PBT UL94V-0,

Housing:PA66/PBT UL94V-0

1002H-XXE-XXXX

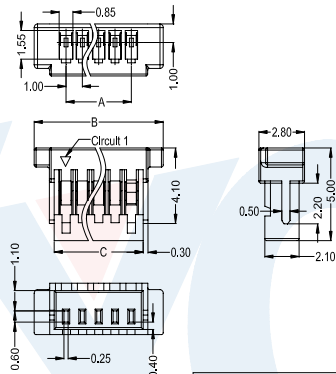

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	1.00	5.00	2.40	13	12.00	16.00	13.40
03	2.00	6.00	3.40	14	13.00	17.00	14.40
04	3.00	7.00	4.40	15	14.00	18.00	15.40
05	4.00	8.00	5.40	16	15.00	19.00	16.40
06	5.00	9.00	6.40	17	16.00	20.00	17.40
07	6.00	10.00	7.40	18	17.00	21.00	18.40
08	7.00	11.00	8.40	19	18.00	22.00	19.40
09	8.00	12.00	9.40	20	19.00	23.00	20.40
10	9.00	13.00	10.40	22	21.00	25.00	21.40
11	10.00	14.00	11.40	24	23.00	27.00	23.40
12	11.00	15.00	12.40				



1002H-XXE-XXXX

PART NO	Material	Suitable Terminal	Mates With Wafer
1002H-XXE-PGNOHF	PA66 UL 94V-0 Halogen Free P-640PG3G-NC(15%GF)	1002T	1002W
1002H-XXE-N0HF	PA66 UL 94V-0 Halogen Free		
1002H-XXE-N0	PA66 UL 94V-0		
1002H-XXE-PT	PBT UL 94V-0		

Housing


備注 (Remark)

1. 材料 (Material)

膠芯:PA66/PBT UL94V-0,

Housing:PA66/PBT UL94V-0

1002H-2*XXE-XXXX

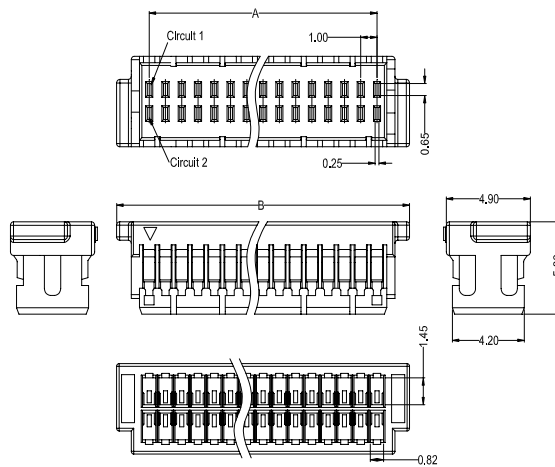

1002H-2*XXE-XXXX

PART NO	Material	Suitable Terminal	Mates With Wafer	Q'ty/Bag
1002H-2*XXE-N0HF	PA66 UL 94V-0 Halogen Free	1002T	1002W	1,000Pcs
1002H-2*XXE-N0	PA66 UL 94V-0			
1002H-2*XXE-PT	PBT UL 94V-0			

Poles	Dimensions (mm)	
	A	B
10	4.00	8.00
12	5.00	9.00
16	7.00	11.00
20	9.00	13.00
30	14.00	18.00
40	19.00	23.00
50	24.00	28.00