

## Specifications

### Wafer

備注 (Remark)

1. 材料 (Material)



膠芯: PA66/LCP UL94V-0

Housing: PA66/LCP UL94V-0


端子: 黃銅

Contact: Brass

2026WV-2\*XX-XXXX

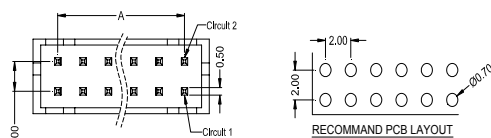

2026WV-2\*XX-XXXX

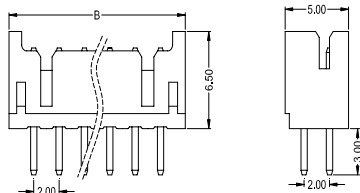

2026WV-2*XX-N0SNHF	Nylon 66 UL 94V-0 Halogen Free	Brass	Tin-Plated	2026H	1,000Pcs
2026WV-2*XX-LPV01	LCP UL 94V-0	Brass	Gold Flash	2026H	1,000Pcs
2026WV-2*XX-NOV01	Nylon 66 UL 94V-0	Brass	Gold Flash	2026H	1,000Pcs
2026WV-2*XX-N0SNBK	Nylon 66 UL 94V-0	Brass	Tin-Plated	2026H	1,000Pcs
2026WV-2*XX-N0SN	Nylon 66 UL 94V-0	Brass	Tin-Plated	2026H	1,000Pcs
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With SWB Housing	Q'ty/Bag

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
04	2.00	6.00	26	24.00	28.00
06	4.00	8.00	28	26.00	30.00
08	6.00	10.00	30	28.00	32.00
10	8.00	12.00	32	30.00	34.00
12	10.00	14.00	34	32.00	36.00
14	12.00	16.00	36	34.00	38.00
16	14.00	18.00	38	36.00	40.00
18	16.00	20.00	40	38.00	42.00
20	18.00	22.00	42	40.00	44.00
22	20.00	24.00	44	42.00	46.00
24	22.00	26.00			

### Housing


備注 (Remark)

1. 材料 (Material)

膠芯: PA66 UL94V-0

Housing: PA66 UL94V-0

2026H-2\*XX-N0

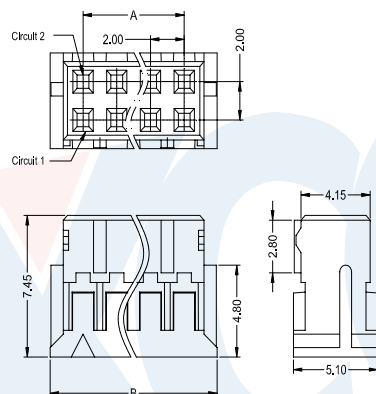

2026H-2\*XX-N0

2026H-2*XXHF-N0	Nylon 66 UL 94V-0 Halogen Free	2026T	2026W	1,000Pcs
2026H-2*XX-N0	Nylon 66 UL 94V-0			
PART NO	Material	Suitable SWB Terminal	Mates With SWB Wafer	Q'ty/Bag

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
04	2.00	5.90	26	24.00	27.90
06	4.00	7.90	28	26.00	29.90
08	6.00	9.90	30	28.00	31.90
10	8.00	11.90	32	30.00	33.90
12	10.00	13.90	34	32.00	35.90
14	12.00	15.90	36	34.00	37.90
16	14.00	17.90	38	36.00	39.90
18	16.00	19.90	40	38.00	41.90
20	18.00	21.90	42	40.00	43.90
22	20.00	23.90	44	42.00	45.90
24	22.00	25.90			

### Terminal


備注 (Remark)

1. 材料 (Material)

端子: 磷青銅

Contact: Phosphor bronze

2026T-PSN-L

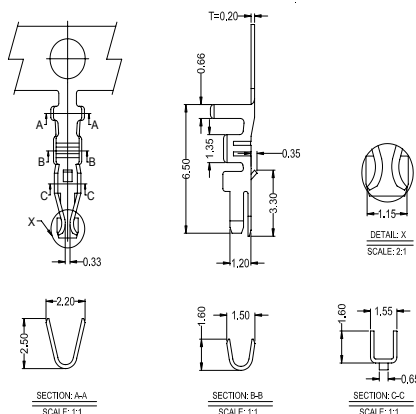

2026T-PSN-L

2026T-PG03-L				Stamping Before Plating: 30~50u" Ni; Contact Area Gold: 3u" Min.		
2026T-PV01-L				Stamping Before Plating: 30~50u" Ni; Whole Gold Flash		
2026T-PSNB-L				Plating Before Stamping: 10~30u" Ni; 40~60u" Sn		
2026T-PSN-L				Stamping Before Plating: 30~50u" Ni; 70~120u" Sn		
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In SWB Housing	Q'ty/Reel